




A collection of various dental handpieces and burs, including high-speed drills, slow-speed burs, and specialized instruments, displayed against a light blue and white background. The instruments are arranged in a group, showing different shapes and sizes, with some featuring yellow accents. The background is a soft, abstract gradient of light blue and white, with a large, glowing yellow sphere partially visible on the right side. The instruments are reflected on the surface they are resting on.

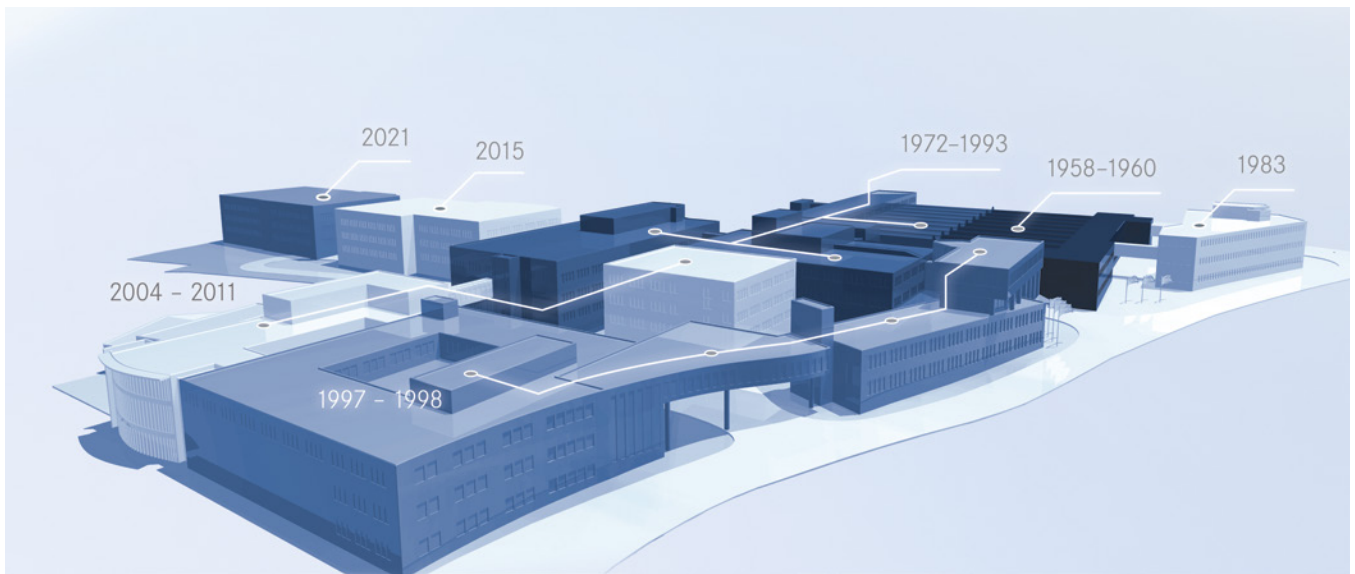

Firmensitz Lemgo, Deutschland
Headquarters Lemgo, Germany

MicroAire ist die Marke von MicroAire Surgical Instruments.
DeSoutter ist die Marke von DeSoutter Surgical.
Synthes ist die Marke von Johnson+Johnson.
Stryker ist die Marke von Stryker Corporation.
Hall ist die Marke von ConMed Corporation.
Aesculap ist die Marke von Aesculap AG.
DePuy ist die Marke von Johnson+Johnson.
Linvatec ist die Marke von ConMed Corporation.
Zimmer Biomet ist die Marke von Zimmer Biomet Holdings Inc.
B. Braun ist die Marke von B. Braun Melsungen AG.

Komet Medical ist nicht affiliert mit den oben genannten Firmen.

Die im Text genannten Produkte und Bezeichnungen sind zum Teil marken-, patent- und urheberrechtlich geschützt. Aus dem Fehlen eines besonderen Hinweises bzw. des Zeichens ® darf nicht geschlossen werden, dass kein rechtlicher Schutz besteht.

Dieses Werk ist urheberrechtlich geschützt. Alle Rechte, auch die der Übersetzung, des Nachdrucks und der Vervielfältigung auch von Teilen daraus, sind vorbehalten. Kein Teil des Werkes darf ohne schriftliche Genehmigung des Herausgebers in irgendeiner Form (Fotokopie, Mikrofilm oder ein anderes Verfahren) reproduziert oder unter Verwendung elektronischer Systeme verarbeitet werden.

Produkt- und Farbänderungen sowie Druckfehler vorbehalten.

Stand: Januar 2020

MicroAire is a brand of MicroAire Surgical Instruments.
DeSoutter is a brand of DeSoutter Surgical.
Synthes is a brand of Johnson+Johnson.
Stryker is a brand of Stryker Corporation.
Hall is a brand of ConMed Corporation.
Aesculap is a brand of Aesculap AG.
DePuy is a brand of Johnson+Johnson.
Linvatec is a brand of ConMed Corporation.
Zimmer is a brand of Zimmer Biomet Holdings Inc.
B. Braun is a brand of B. Braun Melsungen AG.

Komet Medical is not affiliated with any of the above.

Some of the products and designations mentioned in the text are trademarked, patented or copyrighted.
The absence of a special reference or the sign ® should not be interpreted as the absence of legal protection.

This publication is copyrighted. All rights, also with regard to translation, reprint and reproduction (also in the form of extracts) are reserved. No part of this publication may be reproduced or processed using electronic systems in any form or by any means (photocopying, microfilm or other methods) without the written permission of the editor.

Colours and products subject to alterations. Printing errors excepted.

As at January 2020

Inhalt <i>Content</i>		Seite <i>Page</i>					
Einleitung	<i>Introduction</i>	4 – 7					
Tabellen <i>Tables</i>							
Sägeblätter	<i>Saw Blades</i>	8 – 119					
Bohrpins/ Schraubpins	<i>Pins/ Screws</i>	120 – 128					
Spiralbohrer	<i>Twist drills</i>	129 – 133					
Rotierende Instrumente	<i>Rotary Instruments</i>	134 – 165					
Fußfräser (MIS)	<i>Cutters for foot surgery (MIS)</i>	167 – 169					
Index	<i>Index</i>	170 – 177					





Komet Medical. Unser Leistungsspektrum. *Komet Medical. Our Capabilities.*



Zahlen & Fakten

- Gründung: 1923
- Marke: Komet/Komet Medical
- Unabhängiges Familienunternehmen
- Zertifiziert nach: ISO 9001, EN ISO 13485 und ISO 13485 (MDSAP)
- FDA Establishment Reg Nr. 8010468
- Mitarbeiter: > 1100 in Lemgo
> 1350 weltweit
- Unternehmensfläche mehr als 44.500 qm
- Reinraum ISO 7/8 mit integrierter Ultraschallreinigung
- Anzahl der Produktionseinheiten > 860

Facts & Figures

- Founded: 1923
- Brand: Komet/Komet Medical
- Independent family-owned company
- Certified according to: ISO 9001, EN ISO 13485 and ISO 13485 (MDSAP)
- FDA Establishment Reg No. 8010468
- Staff: > 1.100 in Lemgo
> 1.350 worldwide
- Shop floor of more than 480,000 sqft
- Cleanroom ISO 7/8 with integrated ultrasonic cleaning
- No. of production units > 860

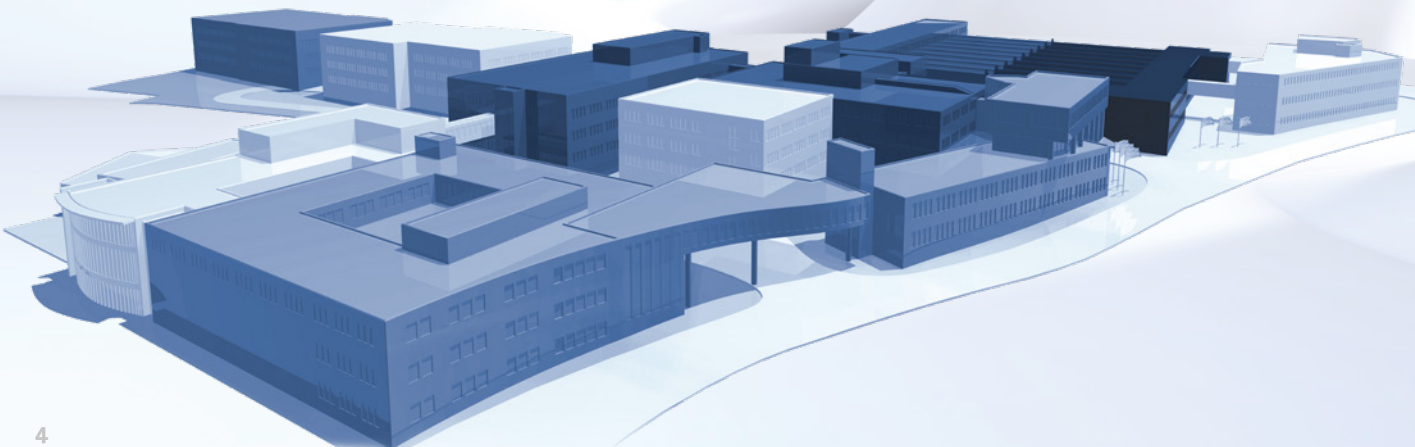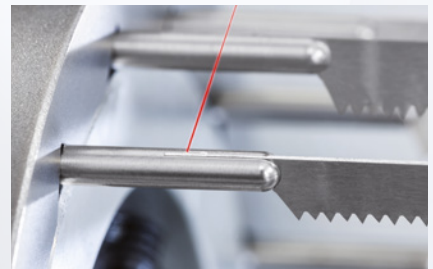

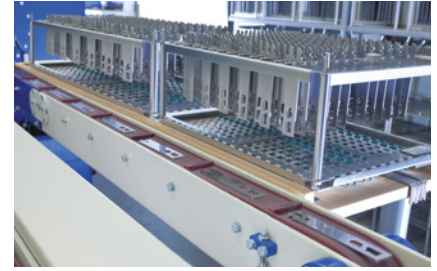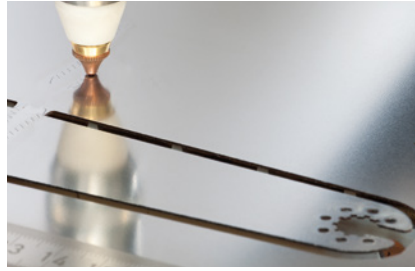

Produkte

Sägeblätter

- geschliffene (Knie-)Sägeblätter
- geschränkte Sägeblätter
- geätzte Sägeblätter

High-/Low Speed Instrumente

- Rostfreier Stahl
- Hartmetall-Stahl Kombination
- Vollhartmetall
- Diamant

Spiralbohrer/kanülierte Bohrer

Guide Pins + Screws

Products

Saw blades


- Ground blades (knee blades)
- Offset blades
- Etched blades

High-/Low Speed Drills

- Stainless steel
- Tungsten Carbide-/stainless steel combination
- Full carbide
- Diamond

Twist drills/Cannulated drills

Guide Pins + Screws

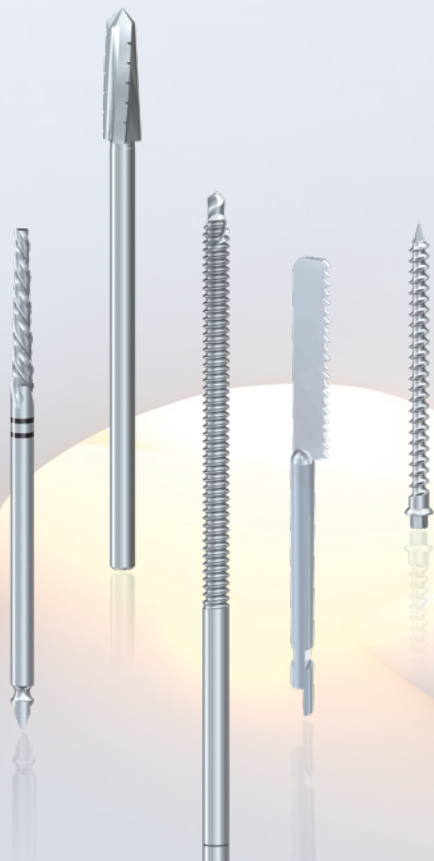

Konformität ist das A und O. *Conformity is the key.*

Kompatibilität


Die Passgenauigkeit zum jeweiligen Antrieb ist ein wichtiges Kriterium für unsere Produkte. Im Rahmen einer kontinuierlichen Marktbeobachtung, bzw. der stichprobenartigen Bestandsaufnahme von Artikeln anderer Hersteller, stellt Komet Medical sicher, dass seine Instrumente auch in den dafür vorgesehenen Antriebssystemen eingesetzt werden können. Die kompatiblen Antriebssysteme werden im Katalog angegeben. In der Rubrik Sägeblätter befindet sich auf jeder Seite ein Hinweis mit entsprechenden Antriebsinformationen.

Für die rotierenden Instrumente befindet sich auf S. 137 eine Tabelle mit Benennung der passenden Antriebssysteme für die HighSpeed Instrumente. Sie haben Fragen hierzu? Unser Fachhändler berät Sie gerne.

Compatibility

A decisive feature of our products is that they perfectly match the power system used. By constantly observing the market and checking instruments randomly chosen from the ranges of other manufacturers, Komet Medical makes sure that our instruments can in fact be used in the intended power systems.


The compatibility of our instruments with the various power systems is indicated in our catalog. In the saw blade section, each page features an information with a list of suitable power systems. As regards rotary instruments, a table with power systems suitable for HighSpeed instruments can be found on page 137 of our catalog. Any questions? Our specially trained dealers will be pleased to advise you.

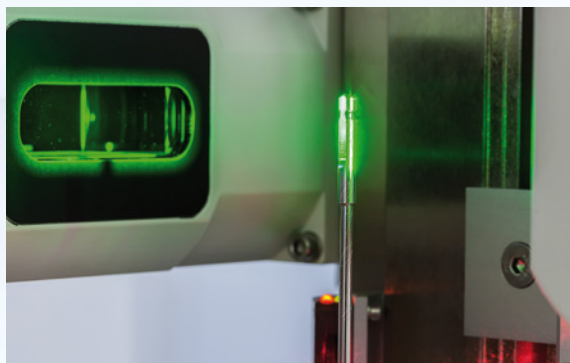



ConMed / Linvatec Hall

Kompatible Anschlüsse
compatible connections:
M Power PRO6300
M Power2 PRO6350M
PowerPro Max PRO5300M
PowerPro + PowerPro
Electric II PRO6 125,
PowerPro Pneumatic
PRO6 175
Hall Serie 4 5067-002
Hall Serie 3 5044-002
Versipower Plus 5071-002
Hall 50 PRO7300B

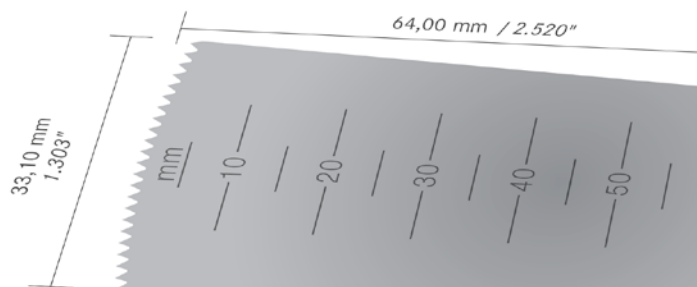

		REF	Blattstärke Material Thickness	KM71.456 STE 0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
		REF	Blattstärke Material Thickness	KM71.456 0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

Verpackung steril/unsteril

Der Zusatz STE ist jetzt ein fester Bestandteil der Artikelnummer steriler Artikel. Diese ist ebenfalls im Katalog aufgeführt, wodurch sofort ersichtlich ist, welche Artikel in steril bzw. unsteril erhältlich sind.

Die jeweiligen Verpackungseinheiten der Artikel sind entsprechend angegeben.

Packaging sterile/non-sterile

The suffix STE is now an integral part of the article number of sterile products. The new article numbers are also shown in our catalog, so you can see at a glance if an article is supplied sterile or nonsterile.

The packaging units of each article are also indicated.


Zertifikate

Über allem steht kompromissloses Qualitätsbewusstsein. Jedes Produkt aus dem Hause Komet mit dem CE-Kennzeichen CE0197 durchläuft ein Konformitätsbewertungsverfahren in Anlehnung an die Richtlinie 93/42/EWG und nach den Anforderungen der EN ISO 13485. Ein wesentlicher Bestandteil für die Erklärung der Konformität ist die Durchführung einer Risikobewertung nach ISO 14971. Die aktuellen Zertifikate können auf unserer Webseite www.kometmedical.de eingesehen und heruntergeladen werden.

Certificates

At Komet, uncompromising quality comes before anything else. Every Komet product provided with the CE mark CE0197 undergoes a conformity assessment procedure in compliance with the directive 93/42/EEC and the provisions of the standard EN ISO 13485. An essential part of the declaration of conformity is the performance of a risk evaluation according to ISO 14971. The current certificates can be viewed and downloaded from our website www.kometmedical.de.

Sägeblätter *Saw Blades*


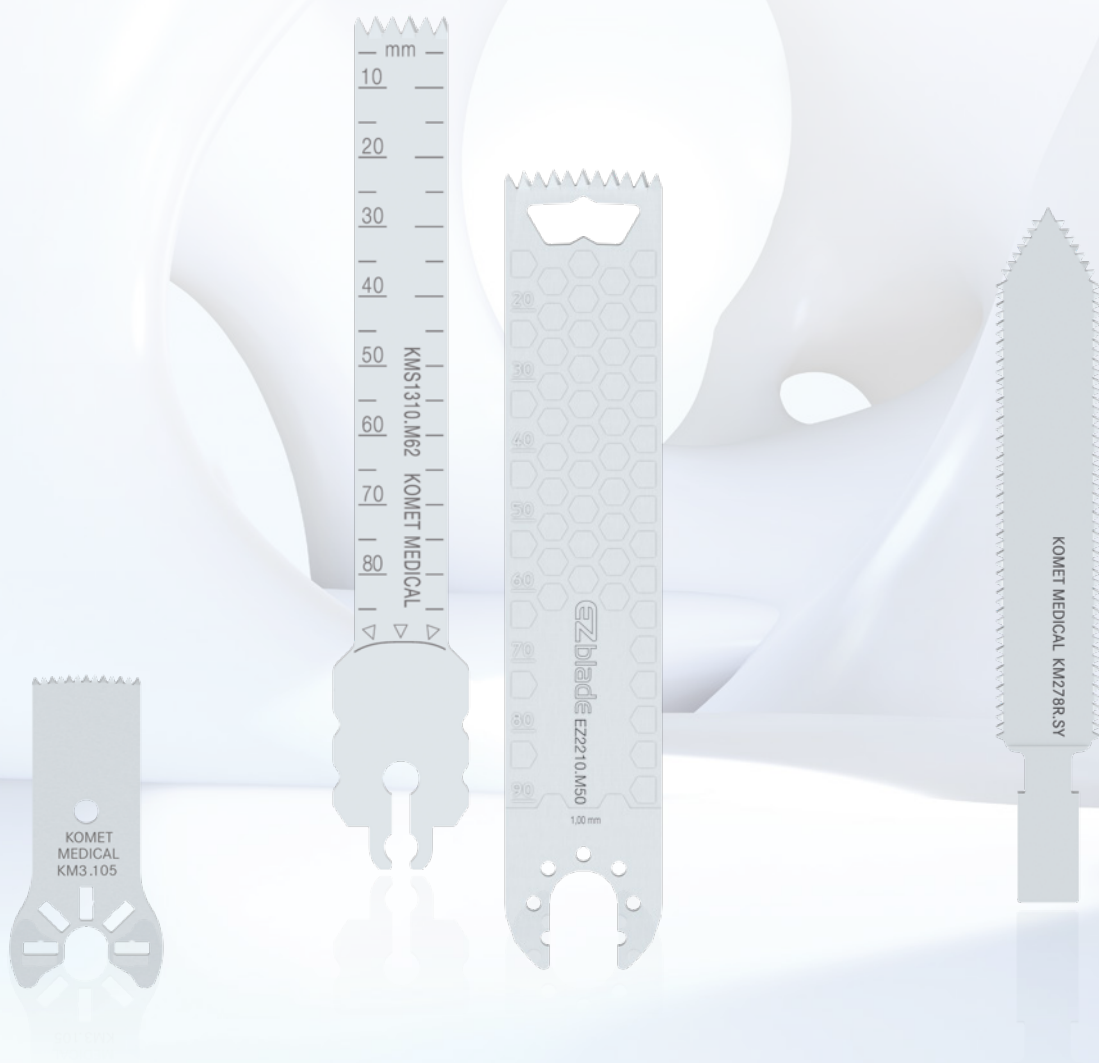


Inhalt Content

Seite Page

Nummernsystem	<i>Numbering system</i>	10
Maße und Bezeichnungen	<i>Dimensions and designations</i>	11
Präzision für jeden Einsatz	<i>Precision for every application</i>	12 – 13
Sägeblätter für die Endoprothetik	<i>Saw blades for reconstruction</i>	14 – 17


Tabellen Tables

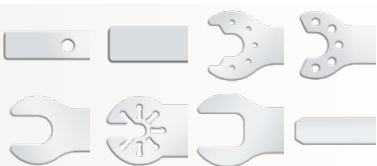Aesculap/ B. Braun	Acculan Comfort Acculan 3Ti Acculan 4	Reciprocating Saw Sternum Saw	18 – 33	
ConMed/ Linvatec Hall	Power Pro, M Power, M Power 2, Versipower Plus, Hall 3/4, Hall 50, Micro 100, MicroE,	Micro Power, Mini Driver, MicroChoice, Sternum Saw, Reciprocating Saw	34 – 53	
DeSoutter	Multi Drive Orthodrive		54 – 61	
MicroAire	Series 7000 Smart Driver	Reciprocating Saw Oscillating Saw	62 – 68	
Stryker	System 2000/4/5/6/7/8 Command 2 Cordless Driver 2/3/4	Sabo, RemB TPS Core	69 – 97	
DePuy Synthes	Compact Air Drive Air Power Line Battery Power Line	Battery Power Line II Trauma recon System TRS Colibri II	98 – 109	
Zimmer Biomet	Zimmer Universal Power System		110 – 119	




Nummernsystem · Kniesägeblätter

Numbering system · Knee saw blades

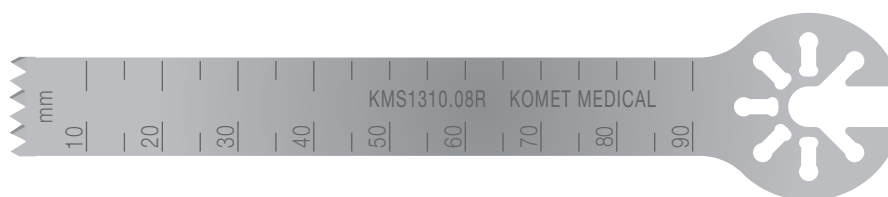



KMS1310.08R

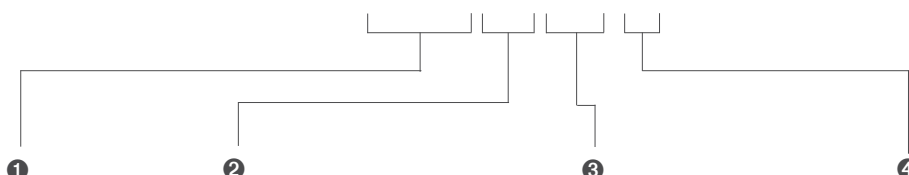

Ausführung · Versions	Breite · Width	Schnittstärke · Cutting Thickness	Anschluss · Connection
EZ = EZblades sterile Knie- sägeblätter <i>EZblades sterile knee saw blades</i>	8 mm 	0,89 mm = 09	 8 - Aesculap/B. Braun <i>alt/old</i>
KMS = Sterile Knie- sägeblätter <i>Sterile knee saw blades</i>	10 mm 	0,95 mm = 95	 81 - Aesculap 3Ti
EVO = EVOLUTION Kniesägeblätter <i>EVOLUTION knee saw blades</i>	13 mm 	1,00 mm = 10	 5 - DePuySynthes/ Zimmer Biomet
	17 mm 	1,19 mm = 12	 0 - ConMed/ Linvatec Hall
	19 mm 	1,27 mm = 13	 3 - MicroAire
	22 mm 	1,37 mm = 14	 6 - Stryker
	25 mm 	1,47 mm = 15	 1 - DeSoutter

Maße und Bezeichnungen

Dimensions and designations

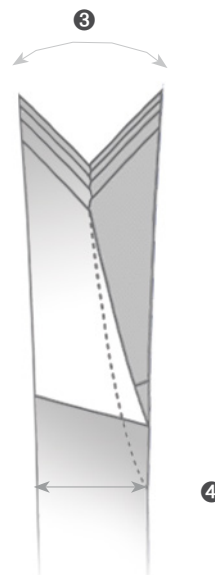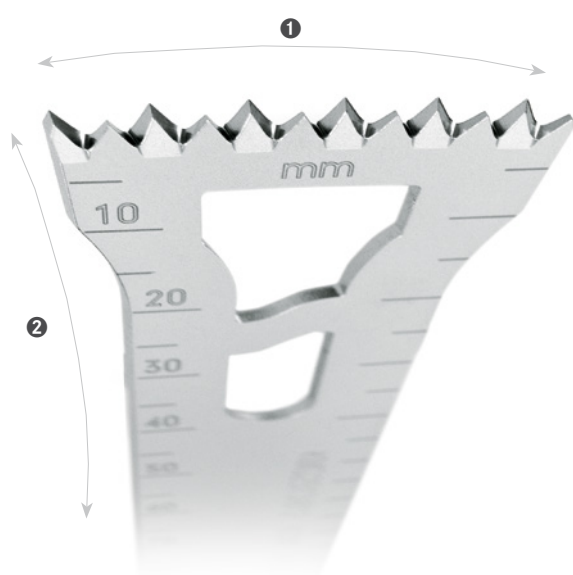

① Breite

Die Breite des Sägeblattes gemessen an der Außenkante der beiden äußeren Zähne.

① Width

The width of the blade measured at the outer edge of the two extreme teeth.

② Nutzbare Länge

Maximale Eindringtiefe der Schneide in den Knochen.

② Usable Length

The maximum depth to which the blade is able to penetrate the bone.

③ Schnittstärke

Die Breite des Sägeblattes gemessen an der Schneidekante.

③ Cutting Thickness


The thickness of the blade measured at the cutting edge.

④ Blattstärke

Die Breite des Sägeblattes – überstehende Verzahnung nicht eingeschlossen.

④ Material Thickness

The thickness of the blade not including the offset tooth design.

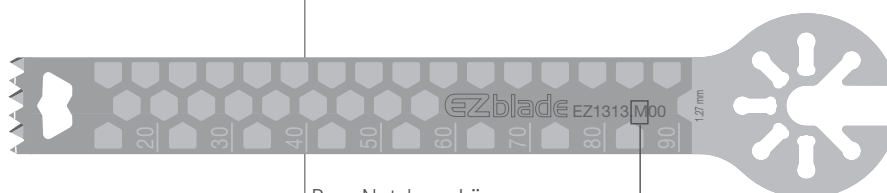

Bsp. Nutzbare Länge
e.g. Usable Length:

EZ1313.M00

60 mm - C
70 mm - S
75 mm - P
90 mm - M
100 mm - L

Präzision für jeden Einsatz. *Precision for every application.*



EZ Blade


Das Premium Kniesägeblatt von Komet Medical mit strukturierter Oberfläche, reduzierten Kanten und speziellem Schränkungsschliff.

Das Sortiment der EZ Blades umfasst Schnittstärken von 1,00 mm bis 1,47 mm. Die Sägeblätter sind steril erhältlich und wiederverwendbar.

EZ Blade

This premium knee saw blade made by Komet Medical is provided with a structured surface, reduced edges and teeth with specially ground clearance.

Our range of EZ blades comprises instruments with a cutting thickness of 1.0 mm to 1.47 mm. Suitable for multiple use, these saw blades are supplied in a sterile condition.

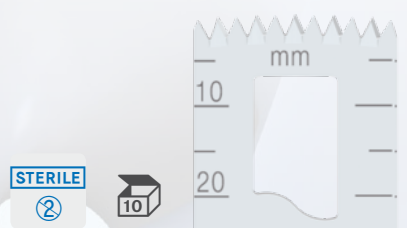


KMS Sägeblatt

Das Sortiment von KMS Sägeblättern ist weit gefächert und umfasst für die gängigsten Antriebssysteme Breiten von 8 mm bis 25 mm mit Schnittstärken von 0,89 mm bis 1,47 mm. Die Sägeblätter sind für die Einmalverwendung vorgesehen und werden steril geliefert.

KMS Saw blades

The broadly diversified range of KMS saw blades is suitable for all commonly used power systems. It comprises blades with a width of 8 mm to 25 mm and a cutting thickness of 0.89 mm to 1.47 mm. Intended for single use, these saw blades are supplied in a sterile condition.

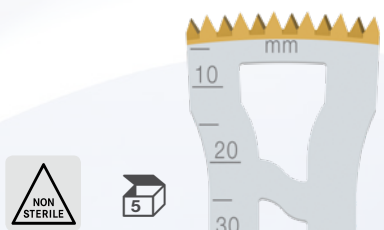

EVO Sägeblatt

Wiederverwendbare Kniesägeblätter,
die unsteril geliefert werden.

Die TIN-beschichteten Sägeblätter sind
mit Schnittstärken von 0,89 mm – 1,37 mm
erhältlich.




EVO Saw blades

*These reusable saw blades are supplied
nonsterile. Provided with a TIN coating, they
are available in cutting thicknesses ranging
from 0.89 mm to 1.37 mm.*

Geschliffene Sägeblätter für die Endoprothetik

Ground saw blades for reconstruction




Schnittstärke Cutting Thickness (mm)	Breite Width (mm)	Nutzbare Länge Usable Length (mm)	Form	Aesculap alt./old	Aesculap 3Ti	ConMed/ Linvatec Hall	DeSoutter	MicroAire	Stryker	DePuy Synthes/ Zimmer Biomet
0,89	13	90	Parallel parallel		KMS1309.M81 STE				KMS1309.M62 STE	
0,89	19	90	Parallel parallel			EVO1909.02R				EVO1909.52R
0,89	19	90	Parallel parallel		KMS1909.M81 STE	KMS1909.02R STE		KMS1909.M30 STE	KMS1909.M62 STE	KMS1909.52R STE
0,89	25	90	Verjüngt flared			KMS2509.06R STE			KMS2509.M62 STE	KMS2509.55R STE
0,95	13	90	Parallel parallel			KMS1395.M00 STE			KMS1395.M62 STE	
0,95	19	100	Parallel parallel			KMS1995.L00 STE			KMS1995.L62 STE	
0,95	22	90	Verjüngt flared			KMS2295F.M00 STE			KMS2295F.M62 STE	
0,95	25	90	Verjüngt flared			KMS2595.M00 STE			KMS2595.M62 STE	
1,00	13	90	Parallel parallel	EVO1310.88R		EVO1310.08R	EVO1310.18R			EVO1310.58R
1,00	13	90	Parallel parallel	EZ1310.M80 STE	EZ1310.M81 STE	EZ1310.M00 STE	EZ1310.M10 STE	EZ1310.M30 STE	EZ1310.M62 STE	EZ1310.M50 STE
1,00	13	90	Parallel parallel	KMS1310.88R STE	KMS1310.M81 STE	KMS1310.08R STE	KMS1310.18R STE	KMS1310.M30 STE	KMS1310.M62 STE	KMS1310.58R STE
1,00	19	70	Parallel parallel		KMS1910.S81 STE				KMS1910.S62 STE	KMS0001.SY STE
1,00	19	90	Parallel parallel		KMS1910.M81 STE				KMS1910.M62 STE	
1,00	22	90	Parallel parallel	EZ2210.M80 STE	EZ2210.M81 STE	EZ2210.M00 STE	EZ2210.M10 STE	EZ2210.M30 STE	EZ2210.M62 STE	EZ2210.M50 STE
1,00	22	90	Parallel parallel	KMS2210.86F STE	KMS2210.M81 STE	KMS2210.06F STE	KMS2210.16F STE	KMS2210.M30 STE	KMS2210.M62 STE	KMS2210.56F STE
1,00	25	70	Parallel parallel						EZ2510P.S62 STE	
1,00	25	70	Verjüngt flared		KMS2510.S81 STE				KMS2510.S62 STE	KMS0004.SY STE
1,00	25	90	Verjüngt flared			EVO2510.06B	EVO2510.16B			EVO2510.56B
1,00	25	90	Verjüngt flared	KMS2510.811 STE	KMS2510.M81 STE	KMS2510.06B STE	KMS2510.16B STE		KMS2510.M62 STE	KMS2510.56B STE

Schnitt- stärke Cutting Thickness (mm)	Breite Width (mm)	Nutzbare Länge Usable Length (mm)	Form	Aesculap alt / old	Aesculap 3Ti	ConMed/ Linvatec Hall	DeSoutter	MicroAire	Stryker	DePuy Synthes/ Zimmer Biomet
1,19	8	70	Parallel parallel							
1,19	10	75	Parallel parallel			KMS1012.P00 STE			KMS0812.S63 STE	
1,19	13	70	Parallel parallel						KMS1012.P63 STE	
1,19	13	70	Parallel parallel						KMS1312.S62 STE	KMS1312.S50 STE
1,19	13	90	Parallel parallel						EVO1312.M62	EVO1312.59J
1,19	13	90	Parallel parallel						EZ1312.M62 STE	EZ1312.M50 STE
1,19	13	90	Parallel parallel	KMS1312.89J STE	KMS1312.M81 STE	KMS1312.09J STE	KMS1312.M10 STE		KMS1312.M62 STE	KMS1312.59J STE
1,19	19	90	Parallel parallel		EZ1912.M81 STE				EZ1912.M62 STE	EZ1912.M50 STE
1,19	19	90	Parallel parallel			KMS1912.M00 STE		KMS1912.M30 STE		
1,19	19	100	Parallel parallel		KMS1912.L81 STE	KMS1912.L00 STE	KMS1912.L10 STE		KMS1912.L62 STE	KMS1912.L50 STE
1,19	22	90	Parallel parallel	EZ2212.M80 STE	EZ2212.M81 STE	EZ2212.M00 STE			EZ2212.M62 STE	EZ2212.M50 STE
1,19	22	90	Verjüngt flared						EZ2212F.M63 STE	
1,19	22	90	Verjüngt flared						KMS2212F.M62 STE	KMS2212F.M50 STE
1,19	25	90	Verjüngt flared				EVO2512.15J			
1,19	25	90	Verjüngt flared	KMS2512.85J STE	KMS2512.M81 STE	KMS2512.05J STE	KMS2512.15J STE		KMS2512.M62 STE	KMS2512.55J STE
1,19	25	90	Parallel parallel						KMS2512P.M62 STE	KMS2512P.M50 STE



Geschliffene Sägeblätter für die Endoprothetik

Ground saw blades for reconstruction



Schnitt- stärke Cutting Thickness (mm)	Breite Width (mm)	Nutzbare Länge Usable Length (mm)	Form	Aesculap alt/old	Aesculap 3Ti	ConMed/ Linvatec Hall	DeSoutter	MicroAire	Stryker	DePuy Synthes/ Zimmer Biomet
1,27	8	60	Parallel parallel						KMS0813.C62 STE	
1,27	10	90	Parallel parallel			KMS1013.M00 STE			KMS1013.M63 STE	
1,27	13	60	Parallel parallel						KMS1313.C62 STE	
1,27	13	70	Verjüngt flared						KMS1313F.S63 STE	
1,27	13	70	Parallel parallel						KMS1313.S62 STE	
1,27	13	90	Parallel parallel	EVO1313.807		EVO1313.07S	EVO1313.17S		EVO1313.M62	EVO1313.57S
1,27	13	90	Parallel parallel	EZ1313.M80 STE	EZ1313.M81 STE	EZ1313.M00 STE	EZ1313.M10 STE	EZ1313.M30 STE	EZ1313.M62 STE	EZ1313.M50 STE
1,27	13	90	Parallel parallel	KMS1313.807 STE	KMS1313.M81 STE	KMS1313.07S STE	KMS1313.17S STE	KMS1313.M30 STE	KMS1313.M62 STE	KMS1313.57S STE
1,27	17	100	Verjüngt flared	KMS1713.L80 STE		KMS1713.L00 STE			KMS1713.L62 STE	KMS1713.L50 STE
1,27	19	90	Parallel parallel	EVO1913.81S		EVO1913.01S			EVO1913.M62	EVO1913.51S
1,27	19	90	Parallel parallel	EZ1913.M80 STE	EZ1913.M81 STE	EZ1913.M00 STE	EZ1913.M10 STE	EZ1913.M30 STE	EZ1913.M62 STE	EZ1913.M50 STE
1,27	19	100	Parallel parallel						EZ1913.L62.T70 STE	
1,27	19	70	Parallel parallel						KMS1913.S62 STE	
1,27	19	90	Parallel parallel	KMS1913.81S STE	KMS1913.M81 STE	KMS1913.01S STE		KMS1913.31S STE	KMS1913.M62 STE	KMS1913.51S STE
1,27	19	100	Parallel parallel			KMS1913.L00 STE			KMS1913.L62 STE	
1,27	19	100	Parallel parallel						KMS1913.L62. T70 STE	KMS1913.L50 STE
1,27	22	90	Parallel parallel	EZ2213.M80 STE	EZ2213.M81 STE	EZ2213.M00 STE	EZ2213.M10 STE	EZ2213.M30 STE	EZ2213.M62 STE	EZ2213.M50 STE
1,27	22	90	Verjüngt flared						EZ2213F.M63 STE	
1,27	22	90	Parallel parallel	KMS2213.87F STE	KMS2213.M81 STE	KMS2213.07F STE	KMS2213.17F STE	KMS2213.M30 STE	KMS2213.M62 STE	KMS2213.57F STE
1,27	22	90	Verjüngt flared		KMS2213F.M81 STE	KMS2213F.M00 STE			KMS2213F.M62 STE	KMS2213F.M50 STE
1,27	25	90	Verjüngt flared	EVO2513.812		EVO2513.05S	EVO2513.15S		EVO2513.M62	EVO2513.55S
1,27	25	90	Parallel parallel						EZ2513P.M62 STE	
1,27	25	100	Parallel parallel						EZ2513P.L62 STE	
1,27	25	90	Verjüngt flared	KMS2513.812 STE	KMS2513.M81 STE	KMS2513.05S STE	KMS2513.15S STE	KMS2513.35S STE	KMS2513.M62 STE	KMS2513.55S STE
1,27	25	90	Parallel parallel			KMS2513P.M00 STE			KMS2513P.M62 STE	
1,27	25	100	Verjüngt flared						KMS2513.L62 STE	
1,27	25	100	Parallel parallel				KMS2513P.L10 STE			



Schnitt- stärke Cutting Thickness (mm)	Breite Width (mm)	Nutzbare Länge Usable Length (mm)	Form	Aesculap alt/old	Aesculap 3Ti	ConMed/ Linivtec Hall	DeSoutter	MicroAire	Stryker	DePuy Synthes/ Zimmer Biomet
1,37	13	90	Parallel parallel	EZ1314.M80 STE	EZ1314.M81 STE	EZ1314.M00 STE	EZ1314.M10 STE	EZ1314.M30 STE	EZ1314.M62 STE	EZ1314.M50 STE
1,37	17	100	Verjüngt flared			KMS1714.L00 STE			KMS1714.L62 STE	KMS1714.L50 STE
1,37	19	90	Parallel parallel			EVO1914.01T				EVO1914.51T
1,37	19	90	Parallel parallel	EZ1914.M80 STE	EZ1914.M81 STE	EZ1914.M00 STE	EZ1914.M10 STE	EZ1914.M30 STE	EZ1914.M62 STE	EZ1914.M50 STE
1,37	19	90	Parallel parallel			KMS1914.01T STE		KMS1914.M30 STE	KMS1914.M62 STE	KMS1914.51T STE
1,37	22	90	Parallel parallel	EZ2214.M80 STE	EZ2214.M81 STE	EZ2214.M00 STE	EZ2214.M10 STE		EZ2214.M62 STE	EZ2214.M50 STE
1,37	25	90	Verjüngt flared	KMS2514.85T STE	KMS2514.M81 STE	KMS2514.05T STE	KMS2514.15T STE	KMS2514.M30 STE	KMS2514.M62 STE	KMS2514.55T STE
1,37	25	100	Verjüngt flared	KMS2514.L80 STE		KMS2514.L00 STE			KMS2514.L62 STE	
1,37	25	100	Parallel parallel			KMS2514P.L00 STE				
1,47	22	90	Parallel parallel	EZ2215.M80 STE	EZ2215.M81 STE	EZ2215.M00 STE			EZ2215.M62 STE	EZ2215.M50 STE
1,47	25	90	Verjüngt flared	KMS2515.813 STE	KMS2515.M81 STE	KMS2515.05I STE	KMS2515.15I STE	KMS2515.35I STE	KMS2515.M62 STE	KMS2515.55I STE




EZblade®

steril verpackte Sägeblätter für den Mehrfachgebrauch
sterile packed saw blades for multiple use

AESCULAP/B. Braun

Kompatible Anschlüsse
compatible connections:
Acculan/Comfort
GA440, GA523, GA623,
GA633, GA640, GB125R,
GB129, GB431, GB432

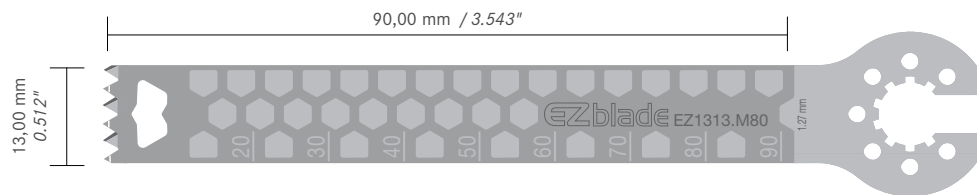

REF

Schnittstärke
Cutting Thickness

EZ1310.M80 STE


1,00 mm
0.039"

EZ1313.M80 STE

1,27 mm
0.050"

EZ1314.M80 STE

1,37 mm
0.054"

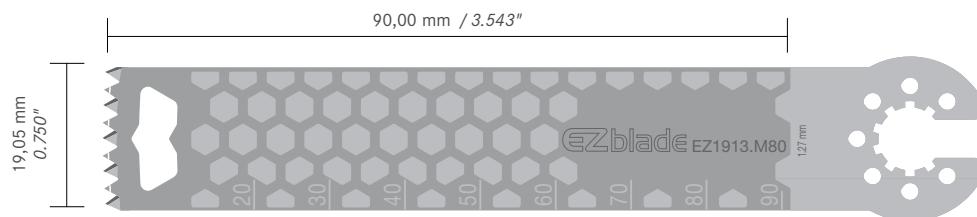

REF


Schnittstärke
Cutting Thickness

EZ1913.M80 STE

1,27 mm
0.050"

EZ1914.M80 STE

1,37 mm
0.054"

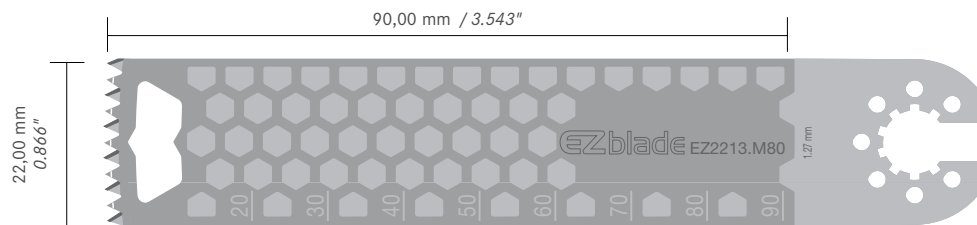

REF

Schnittstärke
Cutting Thickness

EZ2210.M80 STE

1,00 mm
0.039"

EZ2212.M80 STE

1,19 mm
0.047"

EZ2213.M80 STE

1,27 mm
0.050"

EZ2214.M80 STE


1,37 mm
0.054"

EZ2215.M80 STE


1,47 mm
0.058"




Kompatible Anschlüsse
compatible connections:
Acculan/Comfort
GA440, GA523, GA623,
GA633, GA640, GB125R,
GB129, GB431, GB432

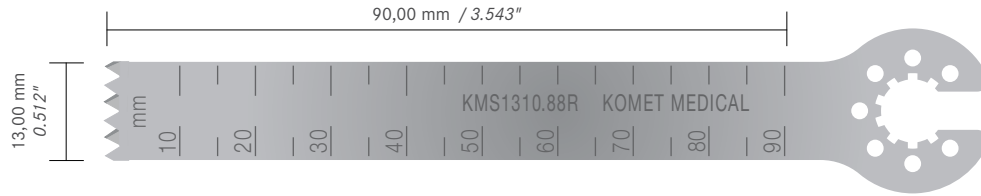


REF	KMS1310.88R STE	KMS1312.89J STE	KMS1313.807 STE						
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,19 mm 0.047"	1,27 mm 0.050"						

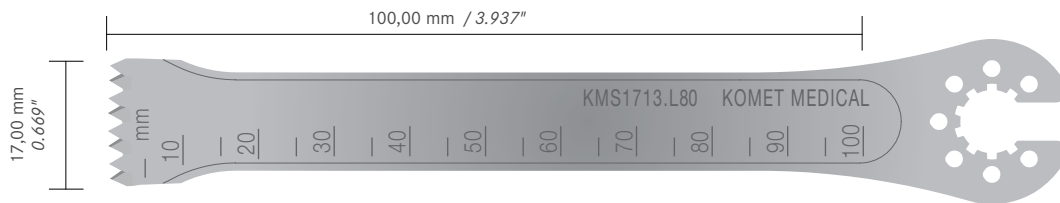

REF	KMS1713.L80 STE								
Schnittstärke Cutting Thickness	1,27 mm 0.050"								

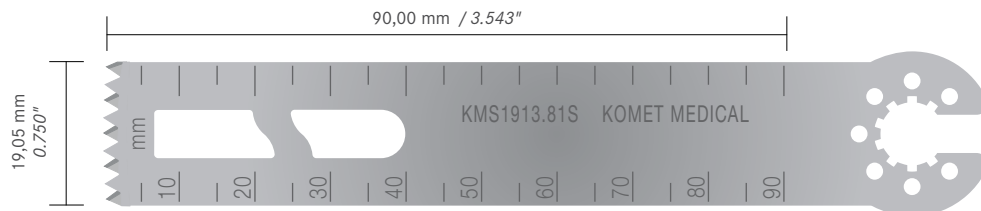

REF	KMS1913.81S STE								
Schnittstärke Cutting Thickness	1,27 mm 0.050"								

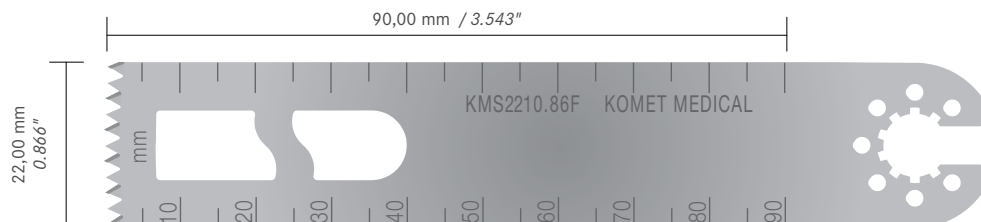

REF	KMS2210.86F STE	KMS2213.87F STE							
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,27 mm 0.050"							






KMS 2 10

steril verpackte Sägeblätter für den Einmalgebrauch
sterile packed saw blades for single use

Kompatible Anschlüsse
compatible connections:
Acculan/Comfort
GA440, GA523, GA623,
GA633, GA640, GB125R,
GB129, GB431, GB432

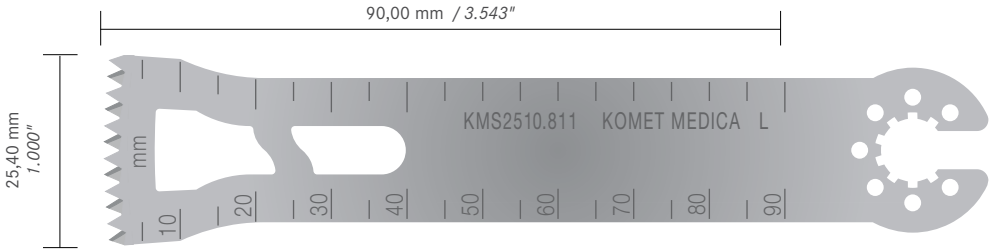

REF

Schnittstärke
Cutting Thickness

KMS2510.811 STE

1,00 mm
0.039"

KMS2512.85J STE

1,19 mm
0.047"

KMS2513.812 STE


1,27 mm
0.050"

KMS2514.85T STE

1,37 mm
0.054"

KMS2515.813 STE

1,47 mm
0.058"

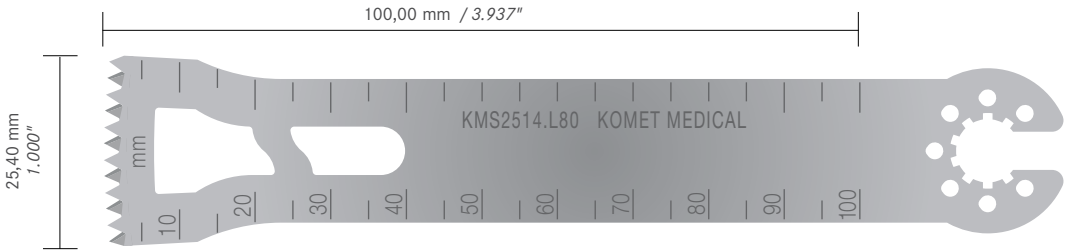

REF

Schnittstärke
Cutting Thickness

KMS2514.L80 STE

1,37 mm
0.054"




EVOLUTION

unsteril verpackte Sägeblätter für den Mehrfachgebrauch
nonsterile packed saw blades for multiple use




Kompatible Anschlüsse
compatible connections:
Acculan/Comfort
GA440, GA523, GA623,
GA633, GA640, GB125R,
GB129, GB431, GB432


AESULAP/B. Braun

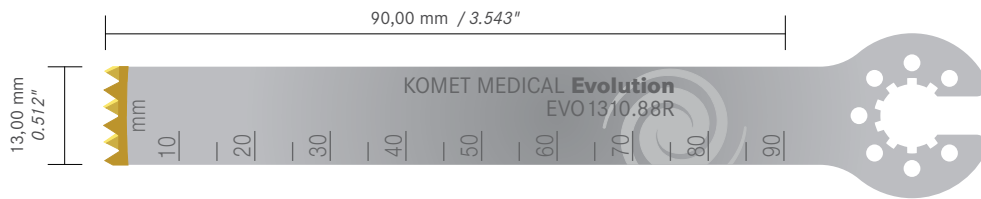


REF	EVO1310.88R	EVO1313.807					
Schnittstärke	1,00 mm	1,27 mm					
Cutting Thickness	0.039"	0.050"					

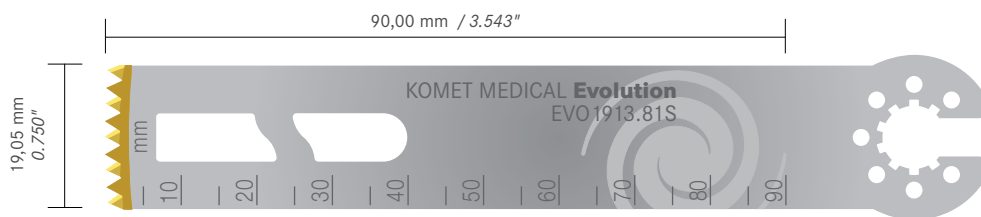

REF	EVO1913.81S						
Schnittstärke	1,27 mm						
Cutting Thickness	0.050"						

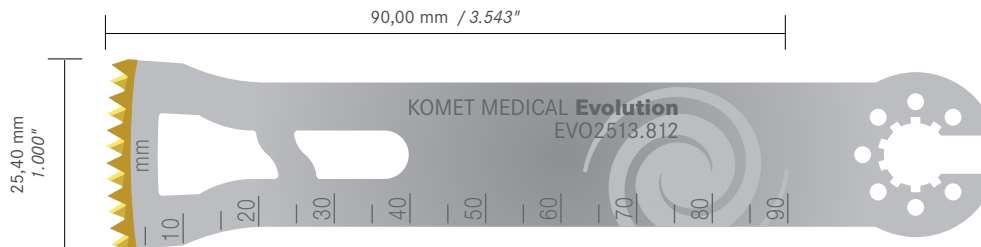


REF	EVO2513.812						
Schnittstärke	1,27 mm						
Cutting Thickness	0.050"						







Kompatible Anschlüsse
compatible connections:
Acculap/Comfort
GA440, GA523, GA623,
GA633, GA640, GB125R,
GB129, GB431, GB432

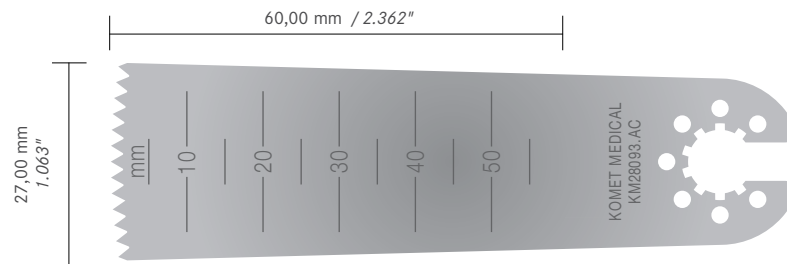


 	REF	KM28093.AC STE	Schnittstärke	0,80 mm
	Blattstärke Material Thickness	0,60 mm 0.024"	Cutting Thickness	0.031"
 	REF	KM28093.AC	Schnittstärke	0,80 mm
	Blattstärke Material Thickness	0,60 mm 0.024"	Cutting Thickness	0.031"

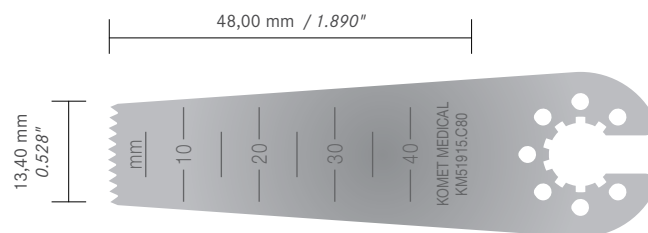

 	REF	KM51915.C80 STE	Schnittstärke	0,60 mm
	Blattstärke Material Thickness	0,40 mm 0.016"	Cutting Thickness	0.024"
 	REF	KM51915.C80	Schnittstärke	0,60 mm
	Blattstärke Material Thickness	0,40 mm 0.016"	Cutting Thickness	0.024"

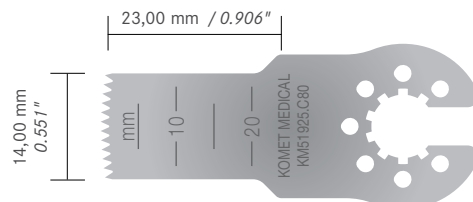


 	REF	KM51925.C80 STE	Schnittstärke	0,60 mm
	Blattstärke Material Thickness	0,40 mm 0.016"	Cutting Thickness	0.024"
 	REF	KM51925.C80	Schnittstärke	0,60 mm
	Blattstärke Material Thickness	0,40 mm 0.016"	Cutting Thickness	0.024"

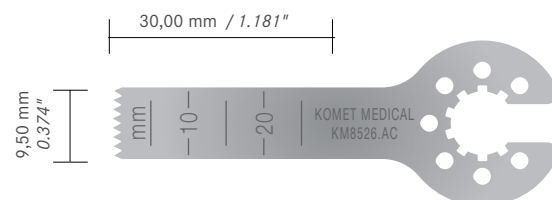


 	REF	KM8526.AC STE	Schnittstärke	0,70 mm
	Blattstärke Material Thickness	0,50 mm 0.020"	Cutting Thickness	0.028"
 	REF	KM8526.AC	Schnittstärke	0,70 mm
	Blattstärke Material Thickness	0,50 mm 0.020"	Cutting Thickness	0.028"



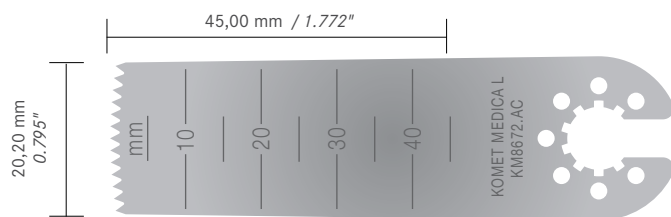


Kompatible Anschlüsse
compatible connections:
Acculan/Comfort
GA440, GA523, GA623,
GA633, GA640, GB125R,
GB129, GB431, GB432

REF	KM8672.AC STE				
Blattstärke Material Thickness	0,70 mm 0.028"	Schnittstärke Cutting Thickness	0,90 mm 0.035"		
REF	KM8672.AC				
Blattstärke Material Thickness	0,70 mm 0.028"	Schnittstärke Cutting Thickness	0,90 mm 0.035"		

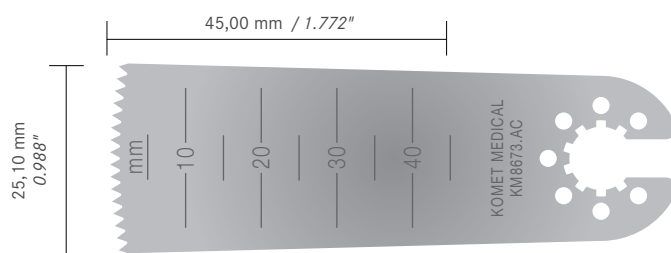

REF	KM8673.AC STE				
Blattstärke Material Thickness	0,70 mm 0.028"	Schnittstärke Cutting Thickness	0,90 mm 0.035"		
REF	KM8673.AC				
Blattstärke Material Thickness	0,70 mm 0.028"	Schnittstärke Cutting Thickness	0,90 mm 0.035"		

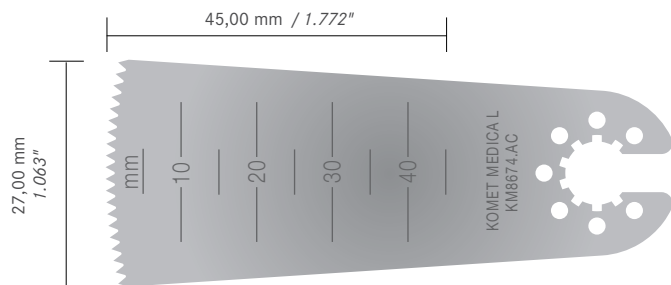


REF	KM8674.AC STE				
Blattstärke Material Thickness	0,70 mm 0.028"	Schnittstärke Cutting Thickness	0,90 mm 0.035"		
REF	KM8674.AC				
Blattstärke Material Thickness	0,70 mm 0.028"	Schnittstärke Cutting Thickness	0,90 mm 0.035"		






Kompatible Anschlüsse
compatible connections:
GB091R, GB131R,
GA621R

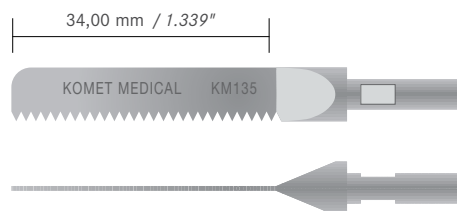

		REF	KM135 STE		
		Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,20 mm 0.047"
		REF	KM135		
		Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,20 mm 0.047"

Kompatible Anschlüsse
compatible connections:
GC927R, GC654R



		REF	KM615R STE		
		Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,35 mm 0.014"
		REF	KM615R		
		Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,35 mm 0.014"


Kompatible Anschlüsse
compatible connections:
GD305, GD310



		REF	PC320 STE		
		Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"
		REF	PC320		
		Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"




Kompatible Anschlüsse
compatible connections:
Acculan 3Ti
GA673, GA668
Acculan 4
GA331, GA336

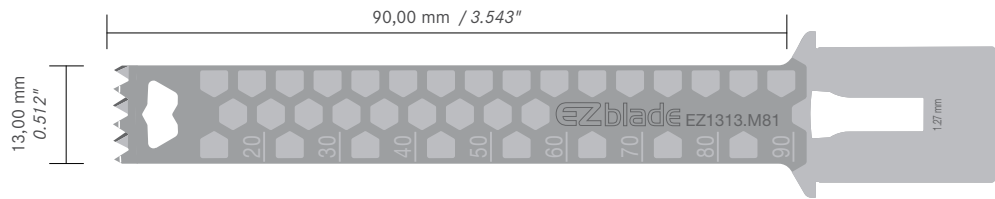

REF	EZ1310.M81 STE	EZ1313.M81 STE	EZ1314.M81 STE			
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,27 mm 0.050"	1,37 mm 0.054"			




STERILE

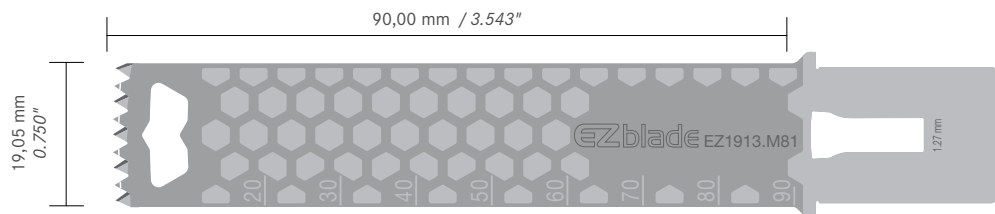

REF	EZ1912.M81 STE	EZ1913.M81 STE	EZ1914.M81 STE			
Schnittstärke Cutting Thickness	1,19 mm 0.047"	1,27 mm 0.050"	1,37 mm 0.054"			



STERILE

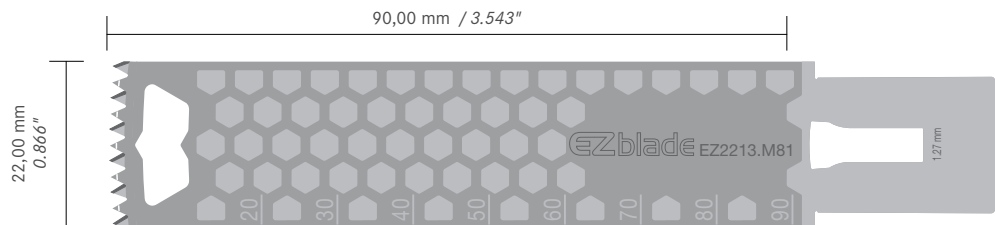

REF	EZ2210.M81 STE	EZ2212.M81 STE	EZ2213.M81 STE	EZ2214.M81 STE	EZ2215.M81 STE	
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,19 mm 0.047"	1,27 mm 0.050"	1,37 mm 0.054"	1,47 mm 0.058"	



STERILE






KMS  

steril verpackte Sägeblätter für den Einmalgebrauch
sterile packed saw blades for single use

AESCULAP/B. Braun

Kompatible Anschlüsse
compatible connections:
Acculan 3Ti
GA673, GA668
Acculan 4
GA331, GA336

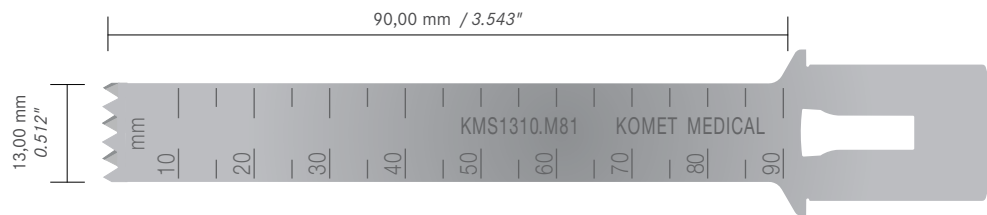

REF

Schnittstärke
Cutting Thickness

KMS1309.M81 STE

0,89 mm
0.035"

KMS1310.M81 STE


1,00 mm
0.039"

KMS1312.M81 STE

1,19 mm
0.047"

KMS1313.M81 STE

1,27 mm
0.050"

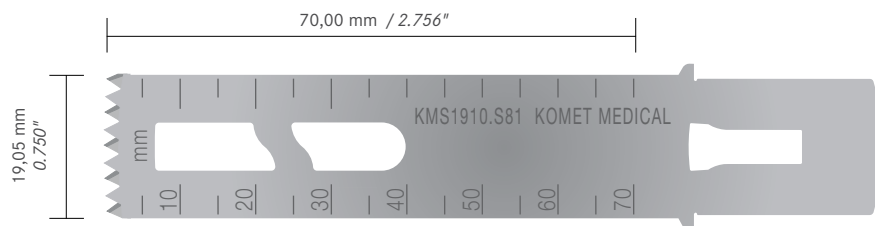


REF

Schnittstärke
Cutting Thickness

KMS1910.S81 STE

1,00 mm
0.039"

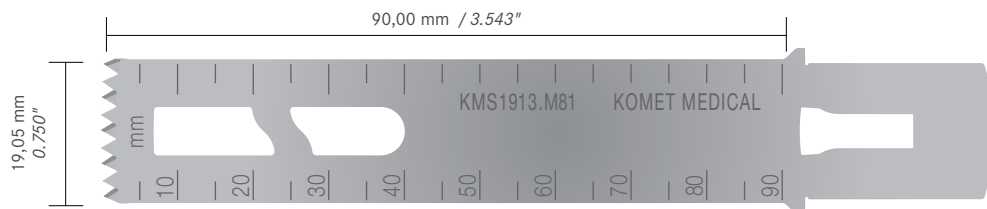

**neu
new**



REF

Schnittstärke
Cutting Thickness

KMS1909.M81 STE


0,89 mm
0.035"

KMS1910.M81 STE

1,00 mm
0.039"

KMS1913.M81 STE

1,27 mm
0.050"

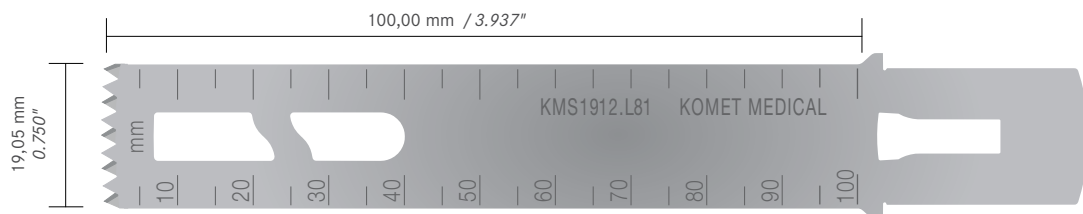

REF


Schnittstärke
Cutting Thickness

KMS1912.L81 STE

1,19 mm
0.047"




Kompatible Anschlüsse
compatible connections:
Acculan 3Ti
GA673, GA668
Acculan 4
GA331, GA336

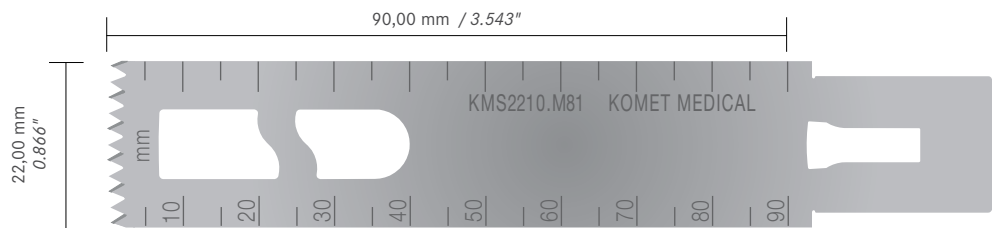


REF	KMS2210.M81 STE	KMS2213.M81 STE							
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,27 mm 0.050"							



REF	KMS2213F.M81 STE								
Schnittstärke Cutting Thickness	1,27 mm 0.050"								

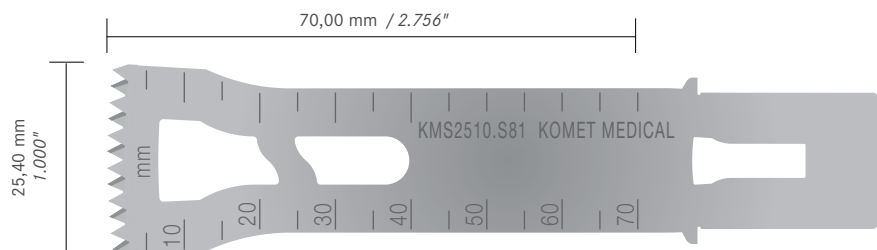

REF	KMS2510.S81 STE								
Schnittstärke Cutting Thickness	1,00 mm 0.039"								

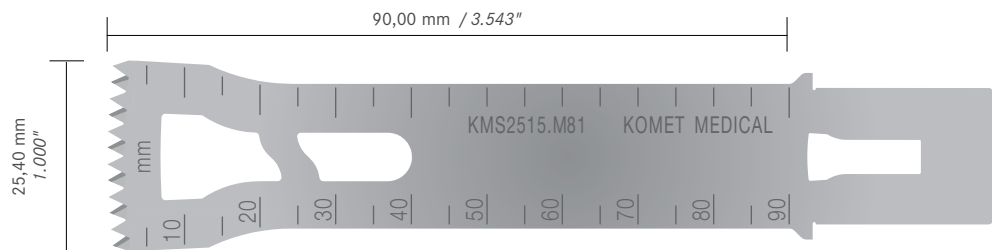


REF	KMS2510.M81 STE	KMS2512.M81 STE	KMS2513.M81 STE	KMS2514.M81 STE	KMS2515.M81 STE				
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,19 mm 0.047"	1,27 mm 0.050"	1,37 mm 0.054"	1,47 mm 0.058"				






Kompatible Anschlüsse
compatible connections:
Acculan 3Ti
GA673, GA668, GB660R
Acculan 4
GA331, GA336

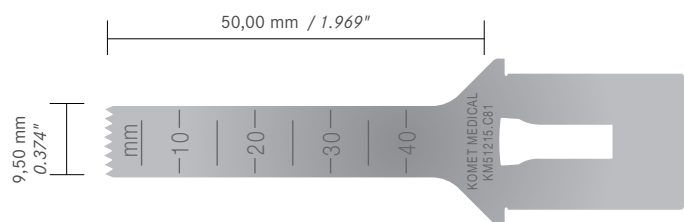


neu
new


STERILE		REF	KM51215.C81 STE		
		Blattstärke	0,60 mm	Schnittstärke	0,80 mm
		Material Thickness	0.024"	Cutting Thickness	0.031"
		REF	KM51215.C81		
		Blattstärke	0,60 mm	Schnittstärke	0,80 mm
		Material Thickness	0.024"	Cutting Thickness	0.031"

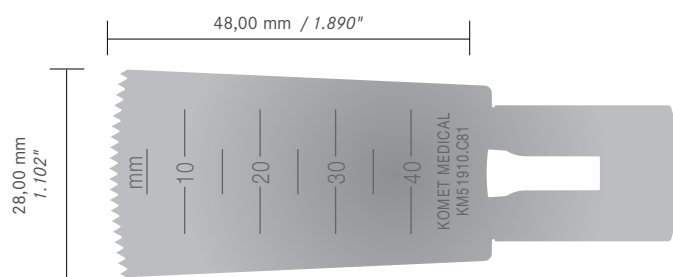

STERILE		REF	KM51910.C81 STE		
		Blattstärke	0,40 mm	Schnittstärke	0,60 mm
		Material Thickness	0.016"	Cutting Thickness	0.024"
		REF	KM51910.C81		
		Blattstärke	0,40 mm	Schnittstärke	0,60 mm
		Material Thickness	0.016"	Cutting Thickness	0.024"

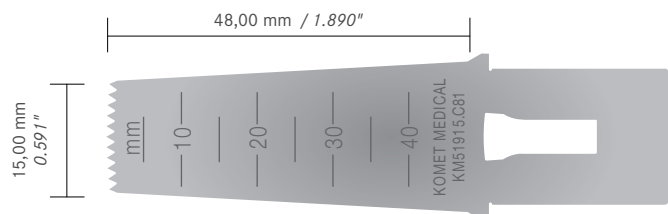

STERILE		REF	KM51915.C81 STE		
		Blattstärke	0,40 mm	Schnittstärke	0,60 mm
		Material Thickness	0.016"	Cutting Thickness	0.024"
		REF	KM51915.C81		
		Blattstärke	0,40 mm	Schnittstärke	0,60 mm
		Material Thickness	0.016"	Cutting Thickness	0.024"

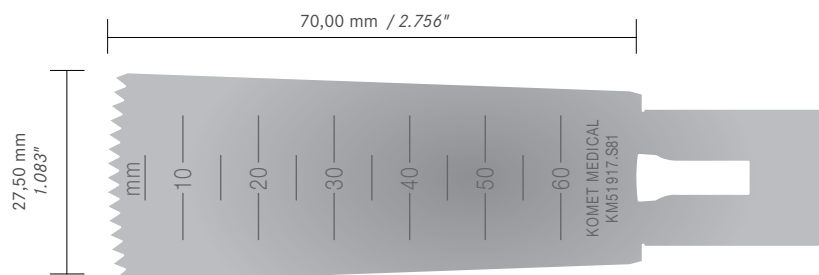


STERILE		REF	KM51917.S81 STE		
		Blattstärke	0,60 mm	Schnittstärke	0,80 mm
		Material Thickness	0.024"	Cutting Thickness	0.031"
		REF	KM51917.S81		
		Blattstärke	0,60 mm	Schnittstärke	0,80 mm
		Material Thickness	0.024"	Cutting Thickness	0.031"






Kompatible Anschlüsse
compatible connections:
Acculan 3Ti
GA673, GA668, GB660R
Acculan 4
GA331, GA336


AESCULAP/B. Braun

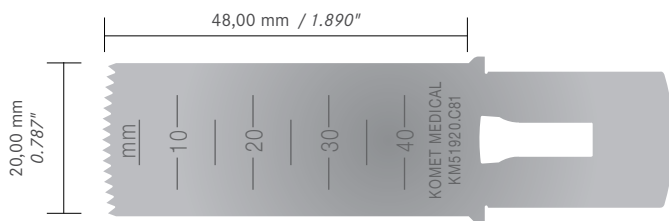

REF	KM51920.C81 STE				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		
REF	KM51920.C81				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		

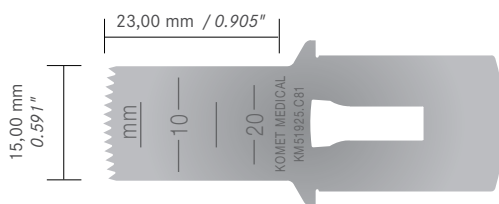

REF	KM51925.C81 STE				
Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		
REF	KM51925.C81				
Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		

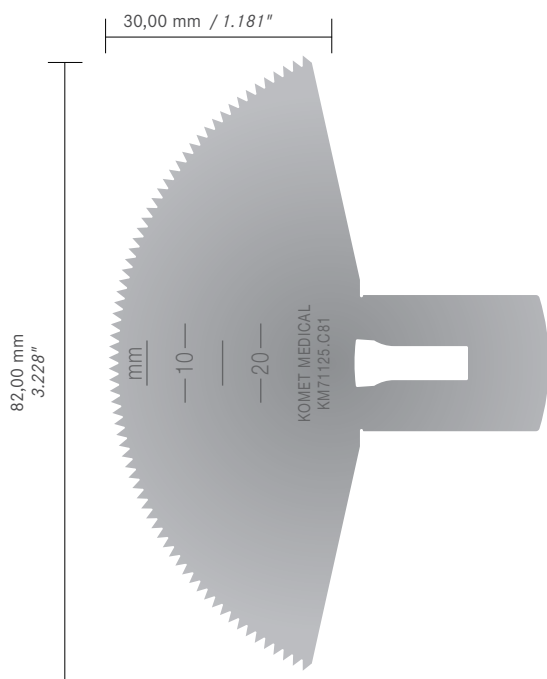

REF	KM71125.C81 STE				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"		
REF	KM71125.C81				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"		


Alle Abbildungen in aktueller Größe (1:1)
All saw blades shown in actual size






AESCULAP/B. Braun

Kompatible Anschlüsse
compatible connections:
Acculan 3Ti
GA673, GA668, GB660R
Acculan 4
GA331, GA336

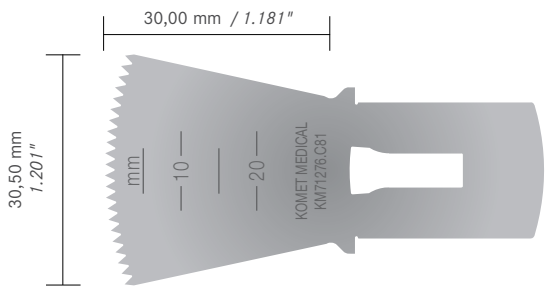

 	REF	KM71276.C81 STE		
	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
 	REF	KM71276.C81		
	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

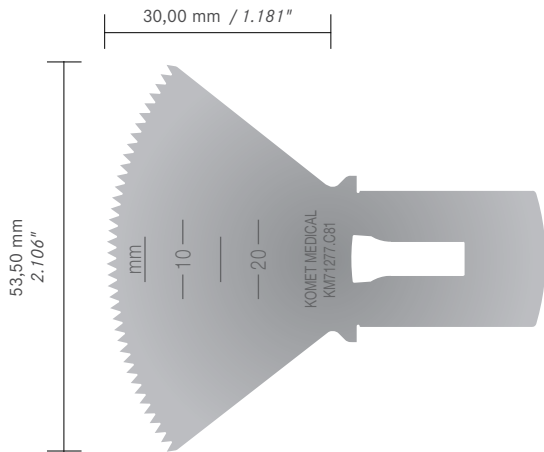


 	REF	KM71277.C81 STE		
	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
 	REF	KM71277.C81		
	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"





Kompatible Anschlüsse
compatible connections:
Acculan 3Ti
GA673, GA668, GB660R
Acculan 4
GA331, GA336

AESCULAP / B. Braun

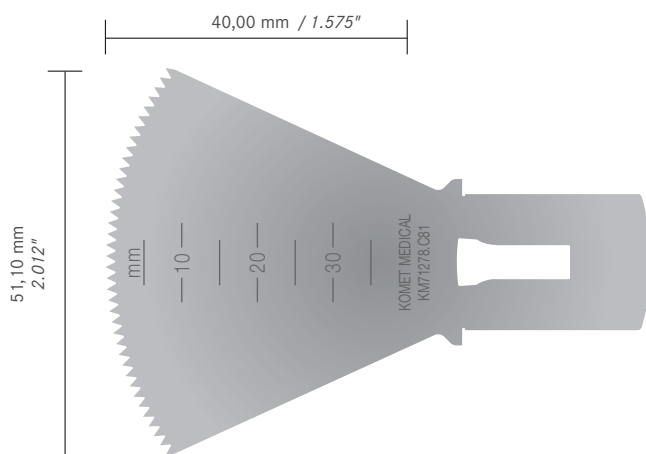


REF	KM71278.C81 STE					
Blattstärke	0,60 mm	Schnittstärke	1,00 mm			
Material Thickness	0.024"	Cutting Thickness	0.039"			
REF	KM71278.C81					
Blattstärke	0,60 mm	Schnittstärke	1,00 mm			
Material Thickness	0.024"	Cutting Thickness	0.039"			





AESCU LAP / B. Braun

Kompatible Anschlüsse
compatible connections:
Acculan 3Ti
GB440, GA635, GA674



REF


Blattstärke
Material Thickness

KM251R.AC STE

0,70 mm
0.028"

Schnittstärke
Cutting Thickness

0,90 mm
0.035"

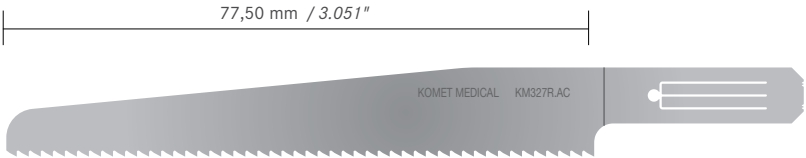

REF


Blattstärke
Material Thickness

KM327R.AC STE

1,00 mm
0.039"

Schnittstärke
Cutting Thickness

1,20 mm
0.047"

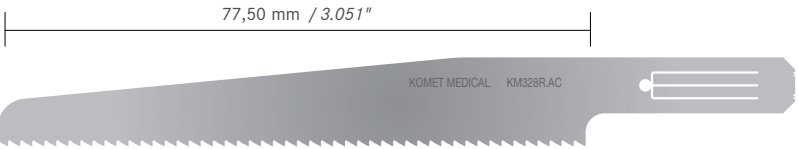

REF


Blattstärke
Material Thickness

KM328R.AC STE

0,70 mm
0.028"

Schnittstärke
Cutting Thickness

0,90 mm
0.035"



REF

Blattstärke
Material Thickness

KM463.AC STE

0,70 mm
0.028"

Schnittstärke
Cutting Thickness


0,90 mm
0.035"





Kompatible Anschlüsse
compatible connections:
Acculan 3Ti
GB440, GA635, GA674


AESCULAP / B. Braun

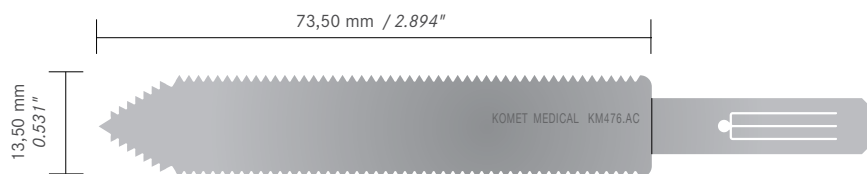

REF	KM476.AC STE		
Blattstärke	1,00 mm	Schnittstärke	1,20 mm
Material Thickness	0.039"	Cutting Thickness	0.047"



STERILE

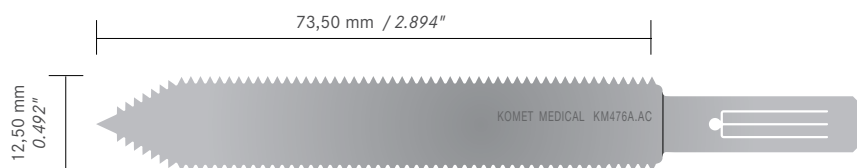


neu
new

REF	KM476A.AC STE		
Blattstärke	1,00 mm	Schnittstärke	1,20 mm
Material Thickness	0.039"	Cutting Thickness	0.047"



STERILE



Kompatible Anschlüsse
compatible connections:
Acculan 3Ti
GB435, GA641R, GA636,
GA674, GB436R

REF	KM8624.AC STE		
Blattstärke	0,70 mm	Schnittstärke	1,35 mm
Material Thickness	0.028"	Cutting Thickness	0.053"



STERILE

REF	KM8624.AC		
Blattstärke	0,70 mm	Schnittstärke	1,35 mm
Material Thickness	0.028"	Cutting Thickness	0.053"



NON
STERILE




EZblade®


steril verpackte Sägeblätter für den Mehrfachgebrauch
sterile packed saw blades for multiple use

ConMed/Linvatec Hall


Kompatible Anschlüsse
compatible connections:
M Power PRO6300
M Power2 PRO6350M
PowerPro Max PRO5300M
PowerPro + PowerPro
Electric II PRO6125,
PowerPro Pneumatic
PRO6175
Hall Serie 4 5067-002
Hall Serie 3 5044-002
Versipower Plus 5071-002
Hall 50 PRO7300B

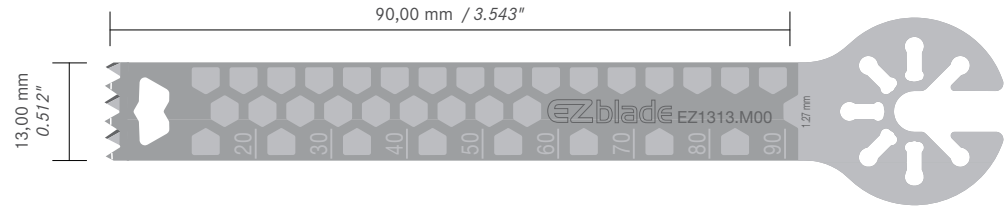

STERILE	1	REF	EZ1310.M00 STE	EZ1313.M00 STE	EZ1314.M00 STE			
		Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,27 mm 0.050"	1,37 mm 0.054"			

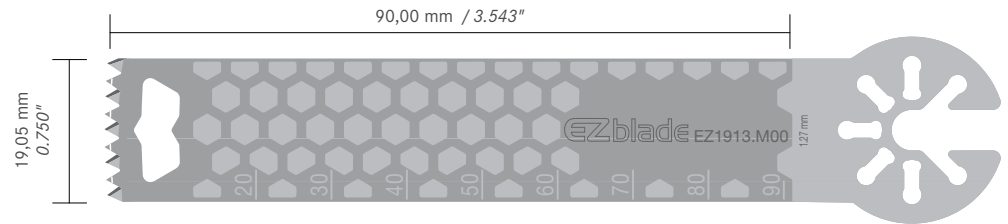

STERILE	1	REF	EZ1912.M00 STE	EZ1913.M00 STE	EZ1914.M00 STE			
		Schnittstärke Cutting Thickness	1,19 mm 0.047"	1,27 mm 0.050"	1,37 mm 0.054"			

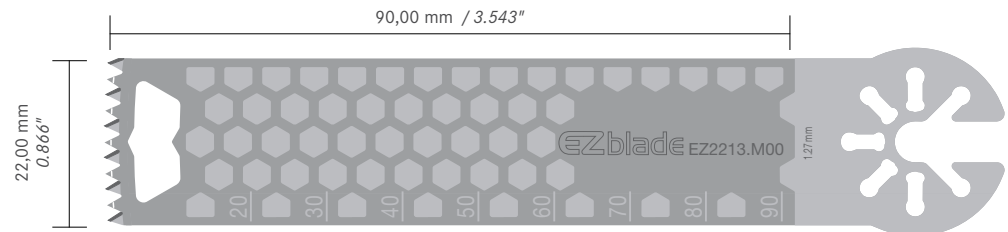

STERILE	1	REF	EZ2210.M00 STE	EZ2212.M00 STE	EZ2213.M00 STE	EZ2214.M00 STE	EZ2215.M00 STE	
		Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,19 mm 0.047"	1,27 mm 0.050"	1,37 mm 0.054"	1,47 mm 0.058"	




Kompatible Anschlüsse
compatible connections:
M Power PRO6300
M Power2 PRO6350M
PowerPro Max PRO5300M
PowerPro + PowerPro
Electric II PRO6125,
PowerPro Pneumatic
PRO6175
Hall Serie 4 5067-002
Hall Serie 3 5044-002
Versipower Plus 5071-002
Hall 50 PRO7300B




neu
new

REF	KMS1012.P00 STE								STERILE 
Schnittstärke Cutting Thickness	1,19 mm 0.047"								

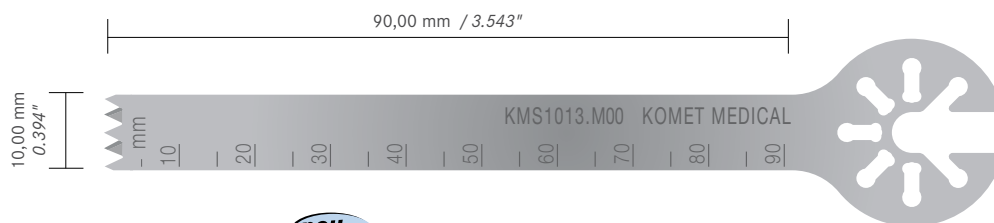


neu
new

REF	KMS1013.M00 STE								STERILE 
Schnittstärke Cutting Thickness	1,27 mm 0.050"								

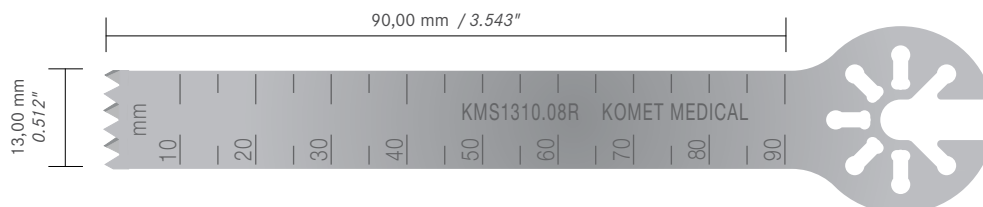

REF	KMS1395.M00 STE	KMS1310.08R STE	KMS1312.09J STE	KMS1313.07S STE					STERILE 
Schnittstärke Cutting Thickness	0,95 mm 0.037"	1,00 mm 0.039"	1,19 mm 0.047"	1,27 mm 0.050"					

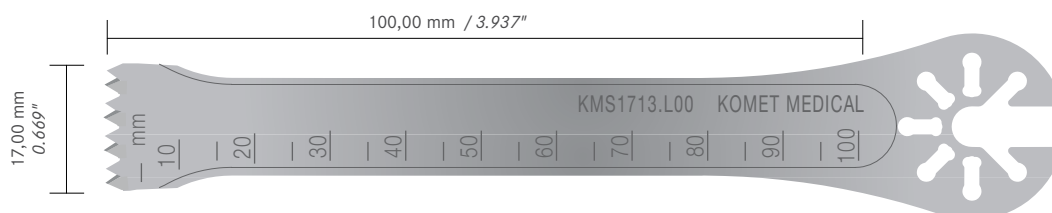


REF	KMS1713.L00 STE	KMS1714.L00 STE							STERILE 
Schnittstärke Cutting Thickness	1,27 mm 0.050"	1,37 mm 0.054"							

**KMS**  steril verpackte Sägeblätter für den Einmalgebrauch
sterile packed saw blades for single use

ConMed/Linvatec Hall

Kompatible Anschlüsse
compatible connections:
M Power PRO6300
M Power2 PRO6350M
PowerPro Max PRO5300M
PowerPro + PowerPro
Electric II PRO6125,
PowerPro Pneumatic
PRO6175
Hall Serie 4 5067-002
Hall Serie 3 5044-002
Versipower Plus 5071-002
Hall 50 PRO7300B

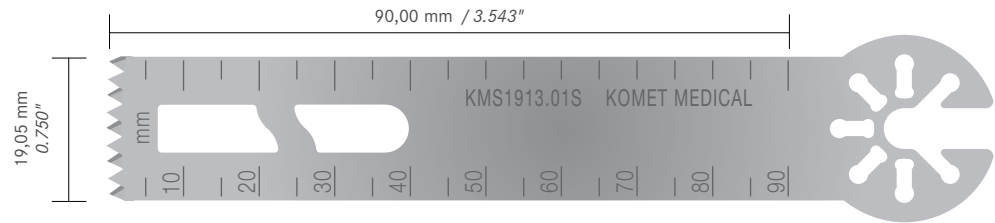

REF

Schnittstärke
Cutting Thickness

KMS1909.02R STE

0,89 mm
0.035"


KMS1912.M00 STE

1,19 mm
0.047"

KMS1913.01S STE

1,27 mm
0.050"

KMS1914.01T STE

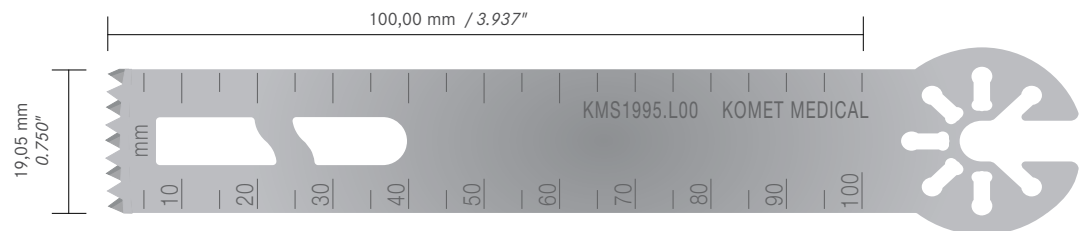1,37 mm
0.054"

REF

Schnittstärke
Cutting Thickness


KMS1995.L00 STE

0,95 mm
0.037"

KMS1912.L00 STE

1,19 mm
0.047"

KMS1913.L00 STE

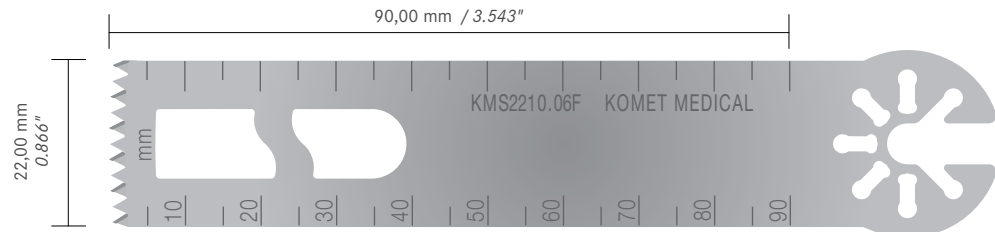1,27 mm
0.050"


REF

Schnittstärke
Cutting Thickness

KMS2210.06F STE

1,00 mm
0.039"

KMS2213.07F STE

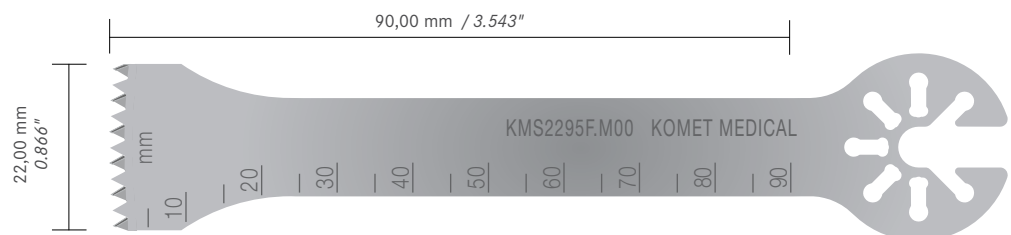1,27 mm
0.050"

REF


Schnittstärke
Cutting Thickness

KMS2295F.M00 STE

0,95 mm
0.037"


KMS2213F.M00 STE

1,27 mm
0.050"

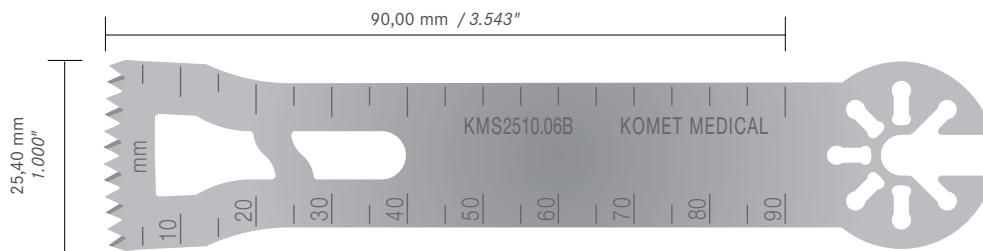


Kompatible Anschlüsse
compatible connections:
M Power PRO6300
M Power2 PRO6350M
PowerPro Max PRO5300M
PowerPro + PowerPro
Electric II PRO6125,
PowerPro Pneumatic
PRO6175
Hall Serie 4 5067-002
Hall Serie 3 5044-002
Versipower Plus 5071-002
Hall 50 PRO7300B


REF	KMS2509.06R STE	KMS2595.M00 STE	KMS2510.06B STE	KMS2512.05J STE	KMS2513.05S STE
Schnittstärke Cutting Thickness	0,89 mm 0.035"	0,95 mm 0.037"	1,00 mm 0.039"	1,19 mm 0.047"	1,27 mm 0.050"

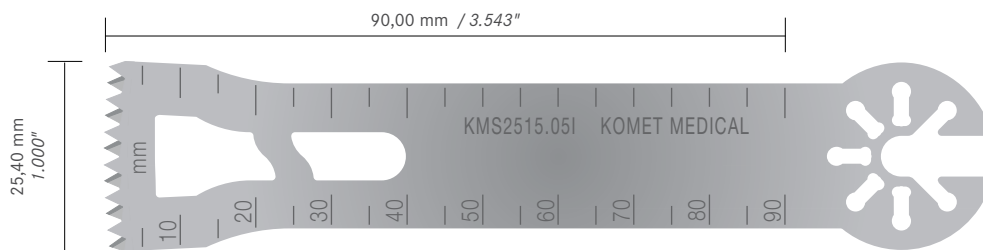

REF	KMS2514.05T STE	KMS2515.05I STE
Schnittstärke Cutting Thickness	1,37 mm 0.054"	1,47 mm 0.058"

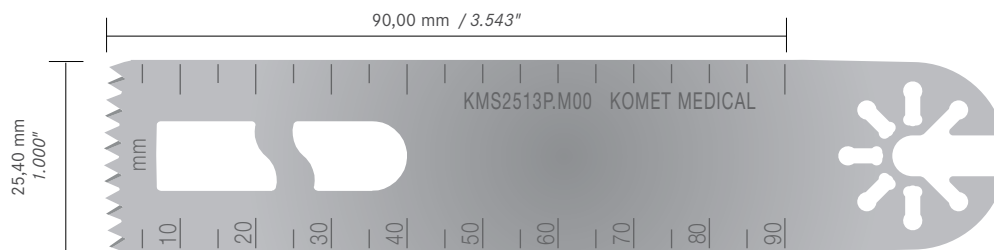

REF	KMS2513P.M00 STE
Schnittstärke Cutting Thickness	1,27 mm 0.050"

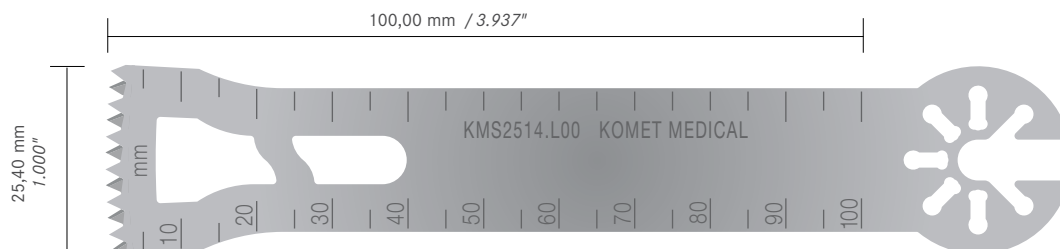

REF	KMS2514.L00 STE
Schnittstärke Cutting Thickness	1,37 mm 0.054"






KMS 2 10

steril verpackte Sägeblätter für den Einmalgebrauch
sterile packed saw blades for single use

Kompatible Anschlüsse
compatible connections:
M Power PRO6300
M Power2 PRO6350M
PowerPro Max PRO5300M
PowerPro + PowerPro
Electric II PRO6125,
PowerPro Pneumatic
PRO6175
Hall Serie 4 5067-002
Hall Serie 3 5044-002
Versipower Plus 5071-002
Hall 50 PRO7300B

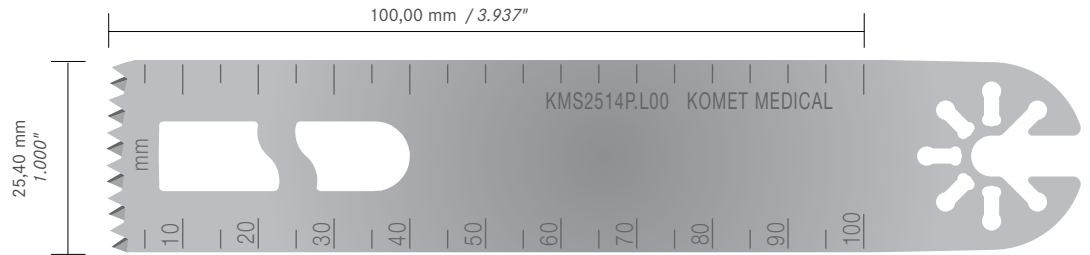

REF

Schnittstärke
Cutting Thickness

KMS2514P.L00 STE

1,37 mm
0.054"




EVOLUTION

unsteril verpackte Sägeblätter für den Mehrfachgebrauch
nonsterile packed saw blades for multiple use




ConMed / Linvatec Hall


Kompatible Anschlüsse
compatible connections:
M Power PRO6300
M Power2 PRO6350M
PowerPro Max PRO5300M
PowerPro + PowerPro
Electric II PRO6125,
PowerPro Pneumatic
PRO6175
Hall Serie 4 5067-002
Hall Serie 3 5044-002
Versipower Plus 5071-002
Hall 50 PRO7300B

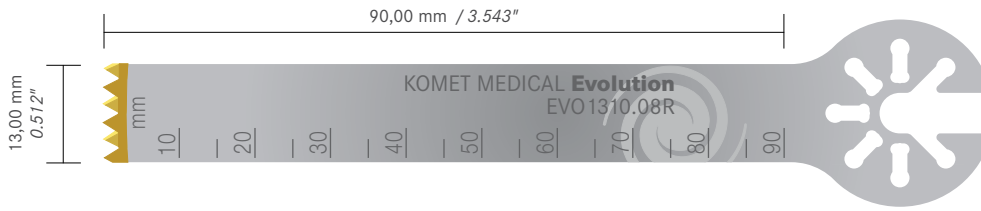

REF	EVO1310.08R	EVO1313.07S					
Schnittstärke	1,00 mm	1,27 mm					
Cutting Thickness	0.039"	0.050"					

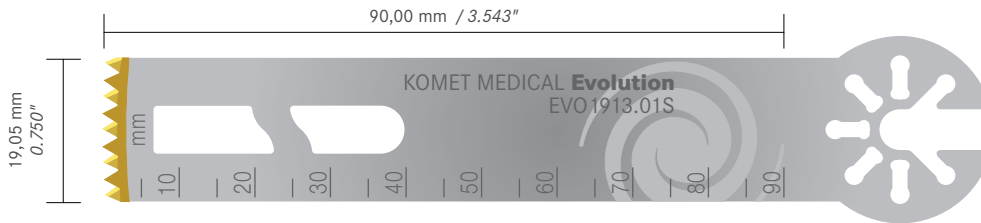

REF	EVO1909.02R	EVO1913.01S	EVO1914.01T				
Schnittstärke	0,89 mm	1,27 mm	1,37 mm				
Cutting Thickness	0.035"	0.050"	0.054"				

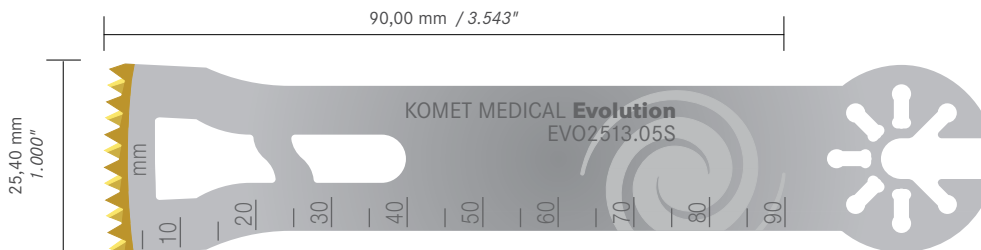


REF	EVO2510.06B	EVO2513.05S					
Schnittstärke	1,00 mm	1,27 mm					
Cutting Thickness	0.039"	0.050"					







Kompatible Anschlüsse
compatible connections:
M Power PRO6300
M Power2 PRO6350M
PowerPro Max PRO5300M
PowerPro + PowerPro
Electric II PRO6125,
PowerPro Pneumatic
PRO6175
Hall Serie 4 5067-002
Hall Serie 3 5044-002
Versipower Plus 5071-002
Hall 50 PRO7300B

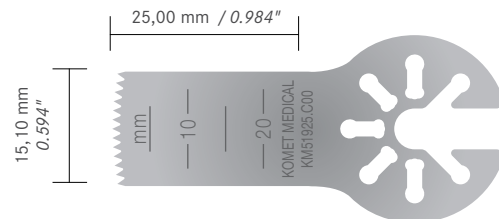


STERILE	REF	KM51925.C00 STE		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"
NON STERILE	REF	KM51925.C00		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"

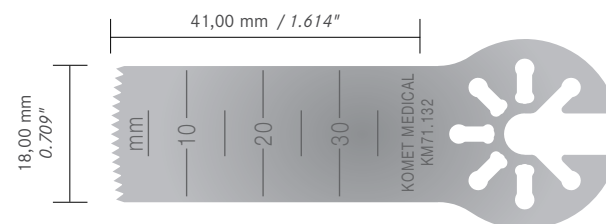

STERILE	REF	KM71.132 STE		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"
NON STERILE	REF	KM71.132		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"

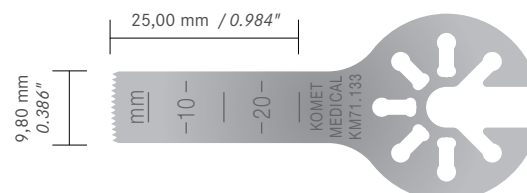


STERILE	REF	KM71.133 STE		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"
NON STERILE	REF	KM71.133		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"

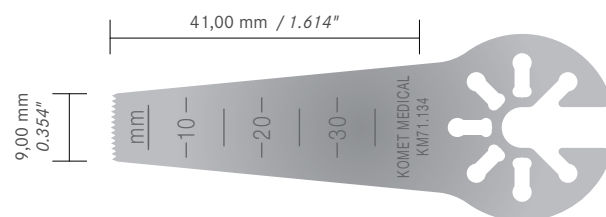


STERILE	REF	KM71.134 STE		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"
NON STERILE	REF	KM71.134		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"



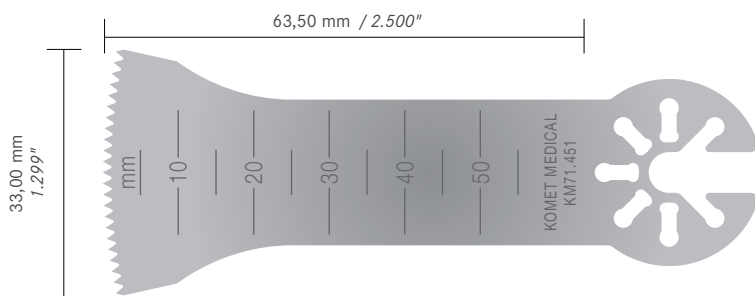


Kompatible Anschlüsse
compatible connections:
M Power PRO6300
M Power2 PRO6350M
PowerPro Max PRO5300M
PowerPro + PowerPro
Electric II PRO6125,
PowerPro Pneumatic
PRO6175
Hall Serie 4 5067-002
Hall Serie 3 5044-002
Versipower Plus 5071-002
Hall 50 PRO7300B


REF	KM71.451 STE	Schnittstärke	0,80 mm		STERILE
Blattstärke	0,60 mm	Cutting Thickness	0.031"		
Material Thickness	0.024"				
REF	KM71.451	Schnittstärke	0,80 mm		NON STERILE
Blattstärke	0,60 mm	Cutting Thickness	0.031"		
Material Thickness	0.024"				

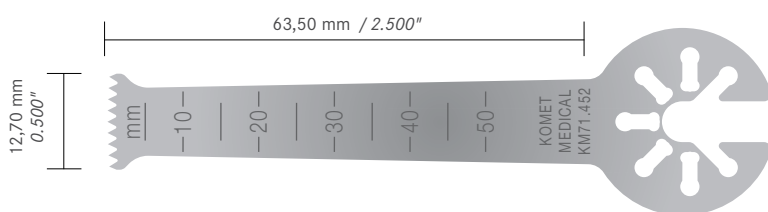

REF	KM71.452 STE	Schnittstärke	0,80 mm		STERILE
Blattstärke	0,60 mm	Cutting Thickness	0.031"		
Material Thickness	0.024"				
REF	KM71.452	Schnittstärke	0,80 mm		NON STERILE
Blattstärke	0,60 mm	Cutting Thickness	0.031"		
Material Thickness	0.024"				

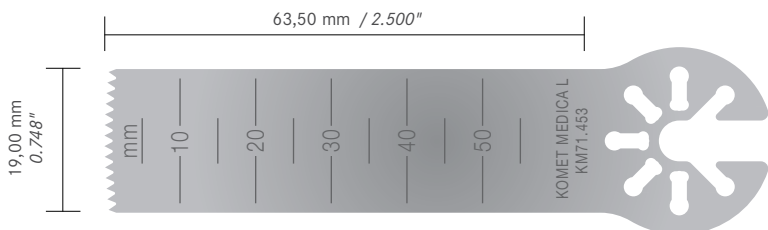


REF	KM71.453 STE	Schnittstärke	0,80 mm		STERILE
Blattstärke	0,60 mm	Cutting Thickness	0.031"		
Material Thickness	0.024"				
REF	KM71.453	Schnittstärke	0,80 mm		NON STERILE
Blattstärke	0,60 mm	Cutting Thickness	0.031"		
Material Thickness	0.024"				

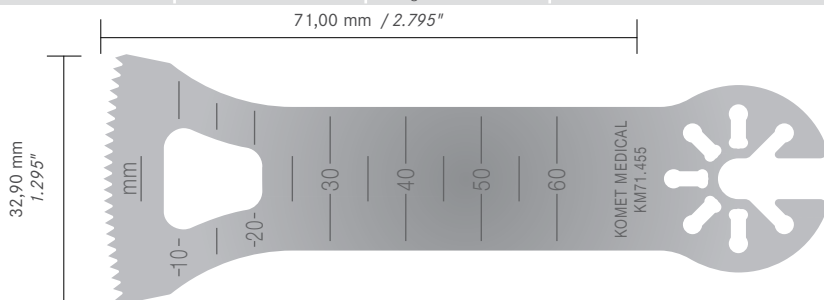


REF	KM71.455 STE	Schnittstärke	1,70 mm		STERILE
Blattstärke	1,20 mm	Cutting Thickness	0.067"		
Material Thickness	0.047"				
REF	KM71.455	Schnittstärke	1,70 mm		NON STERILE
Blattstärke	1,20 mm	Cutting Thickness	0.067"		
Material Thickness	0.047"				




Kompatible Anschlüsse
compatible connections:
M Power PRO6300
M Power2 PRO6350M
PowerPro Max PRO5300M
PowerPro + PowerPro
Electric II PRO6125,
PowerPro Pneumatic
PRO6175
Hall Serie 4 5067-002
Hall Serie 3 5044-002
Versipower Plus 5071-002
Hall 50 PRO7300B

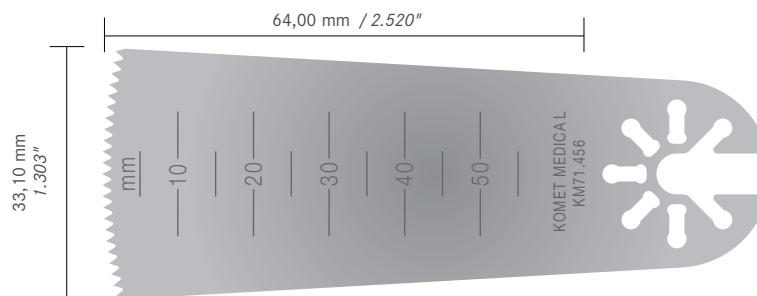


STERILE	REF	KM71.456 STE		
	Blattstärke	0,80 mm	Schnittstärke	1,00 mm
	Material Thickness	0.031"	Cutting Thickness	0.039"
NON STERILE	REF	KM71.456		
	Blattstärke	0,80 mm	Schnittstärke	1,00 mm
	Material Thickness	0.031"	Cutting Thickness	0.039"

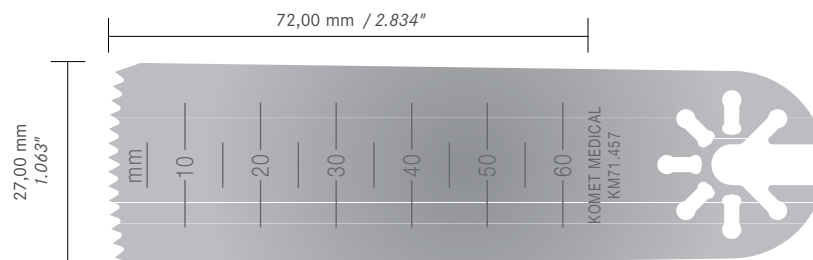

STERILE	REF	KM71.457 STE		
	Blattstärke	0,60 mm	Schnittstärke	0,80 mm
	Material Thickness	0.024"	Cutting Thickness	0.031"
NON STERILE	REF	KM71.457		
	Blattstärke	0,60 mm	Schnittstärke	0,80 mm
	Material Thickness	0.024"	Cutting Thickness	0.031"

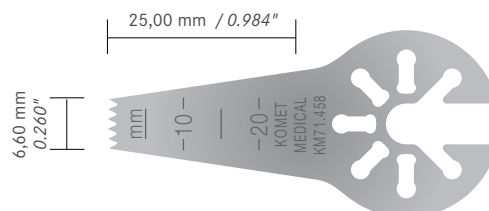


STERILE	REF	KM71.458 STE		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"
NON STERILE	REF	KM71.458		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"

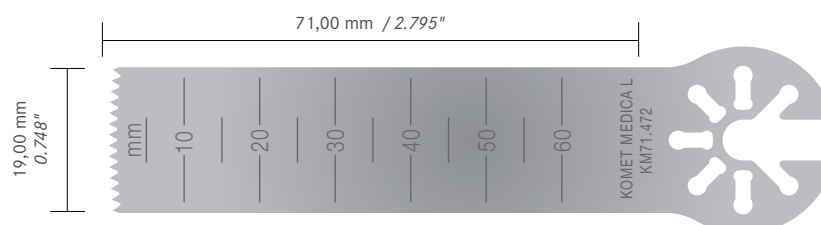


STERILE	REF	KM71.472 STE		
	Blattstärke	0,80 mm	Schnittstärke	1,00 mm
	Material Thickness	0.031"	Cutting Thickness	0.039"
NON STERILE	REF	KM71.472		
	Blattstärke	0,80 mm	Schnittstärke	1,00 mm
	Material Thickness	0.031"	Cutting Thickness	0.039"



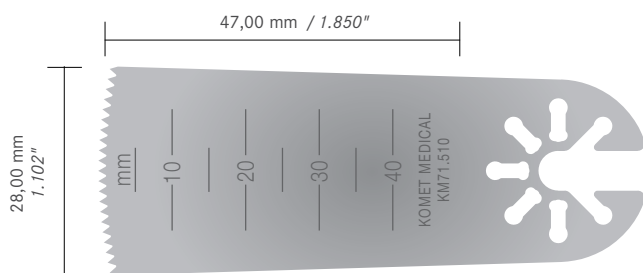


Kompatible Anschlüsse
compatible connections:
M Power PRO6300
M Power2 PRO6350M
PowerPro Max PRO5300M
PowerPro + PowerPro
Electric II PRO6125,
PowerPro Pneumatic
PRO6175
Hall Serie 4 5067-002
Hall Serie 3 5044-002
Versipower Plus 5071-002
Hall 50 PRO7300B

REF	KM71.510 STE	Schnittstärke	0,60 mm	 STERILE
Blattstärke	0,40 mm	Cutting Thickness	0.024"	
Material Thickness	0.016"			
REF	KM71.510	Schnittstärke	0,60 mm	 NON STERILE
Blattstärke	0,40 mm	Cutting Thickness	0.024"	
Material Thickness	0.016"			

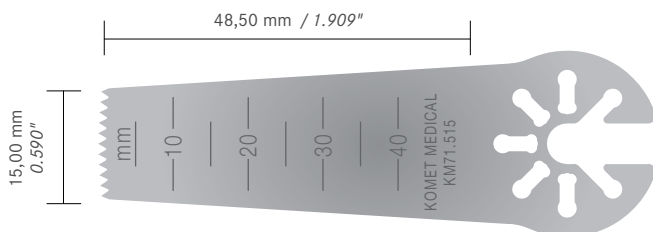

REF	KM71.515 STE	Schnittstärke	0,60 mm	 STERILE
Blattstärke	0,40 mm	Cutting Thickness	0.024"	
Material Thickness	0.016"			
REF	KM71.515	Schnittstärke	0,60 mm	 NON STERILE
Blattstärke	0,40 mm	Cutting Thickness	0.024"	
Material Thickness	0.016"			

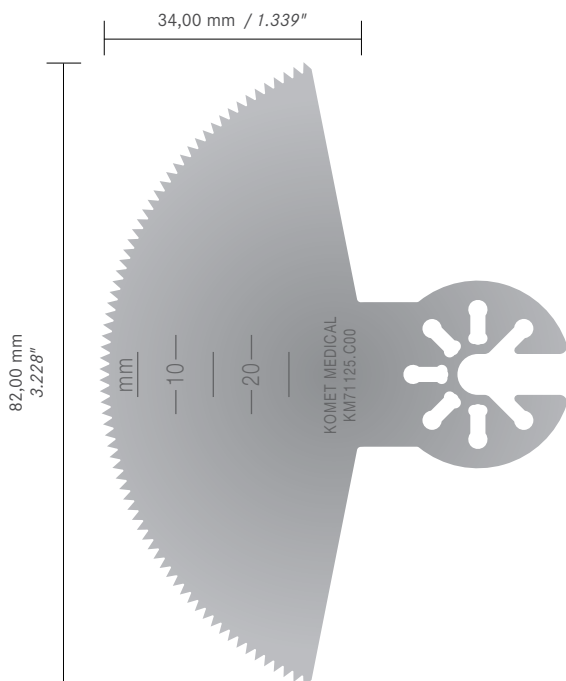


REF	KM71125.C00 STE	Schnittstärke	1,00 mm	 STERILE
Blattstärke	0,60 mm	Cutting Thickness	0.039"	
Material Thickness	0.024"			
REF	KM71125.C00	Schnittstärke	1,00 mm	 NON STERILE
Blattstärke	0,60 mm	Cutting Thickness	0.039"	
Material Thickness	0.024"			






Kompatible Anschlüsse
compatible connections:
M Power PRO6300
M Power2 PRO6350M
PowerPro Max PRO5300M
PowerPro + PowerPro
Electric II PRO6125,
PowerPro Pneumatic
PRO6175
Hall Serie 4 5067-002
Hall Serie 3 5044-002
Versipower Plus 5071-002
Hall 50 PRO7300B

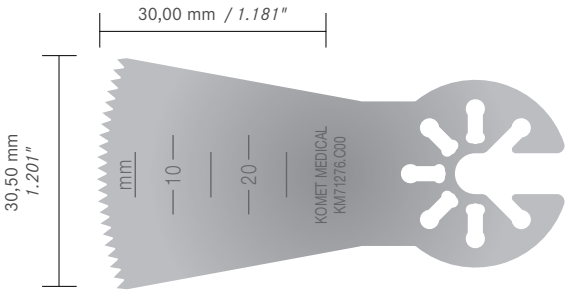

		REF	KM71276.C00 STE		
		Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
		REF	KM71276.C00		
		Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

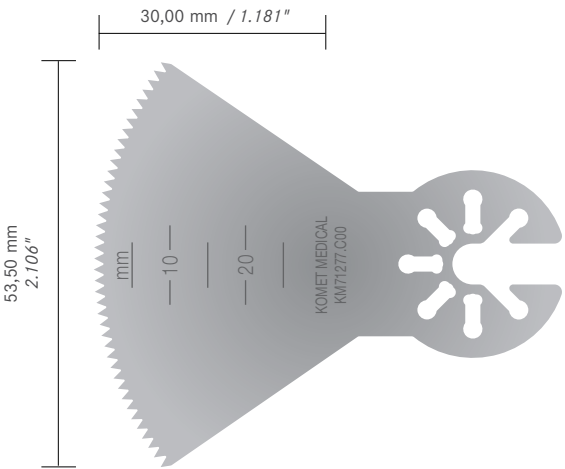


		REF	KM71277.C00 STE		
		Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
		REF	KM71277.C00		
		Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"





Kompatible Anschlüsse
compatible connections:
M Power PRO6300
M Power2 PRO6350M
PowerPro Max PRO5300M
PowerPro + PowerPro
Electric II PRO6125,
PowerPro Pneumatic
PRO6175
Hall Serie 4 5067-002
Hall Serie 3 5044-002
Versipower Plus 5071-002
Hall 50 PRO7300B

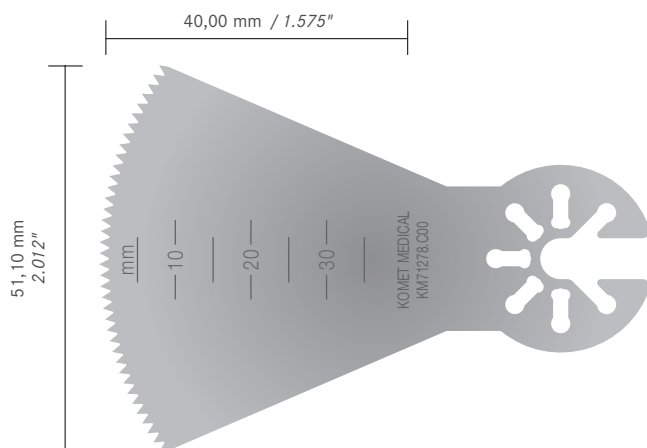


REF	KM71278.C00 STE				 STERILE
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"		
REF	KM71278.C00				 NON STERILE
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"		






Kompatible Anschlüsse <i>compatible connections:</i>	Micro 100™ 5053-012, Sagittal saws	Micro Power™ 6021-024, 6020-024	MicroChoice 5020-024, MicroE 5040-007
---	---------------------------------------	------------------------------------	--





		REF	KM3002 STE			REF	KM3005 STE		
		Blattstärke	0,40 mm	Schnittstärke	0,60 mm	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
		Material Thickness	0.016"	Cutting Thickness	0.024"	Material Thickness	0.016"	Cutting Thickness	0.024"
		REF	KM3002			REF	KM3005		
		Blattstärke	0,40 mm	Schnittstärke	0,60 mm	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
		Material Thickness	0.016"	Cutting Thickness	0.024"	Material Thickness	0.016"	Cutting Thickness	0.024"





		REF	KM3006 STE		
		Blattstärke	0,40 mm	Schnittstärke	0,60 mm
		Material Thickness	0.016"	Cutting Thickness	0.024"
		REF	KM3006		
		Blattstärke	0,40 mm	Schnittstärke	0,60 mm
		Material Thickness	0.016"	Cutting Thickness	0.024"



Kompatible Anschlüsse
compatible connections:

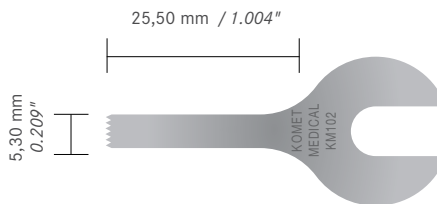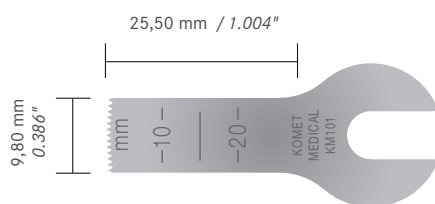
Micro 100™ 5053-011
Micro E 5040-002


REF	KM101 STE	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	5	STERILE
REF	KM101	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	5	NON STERILE

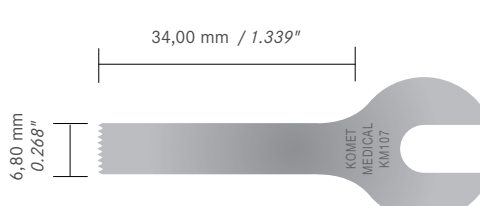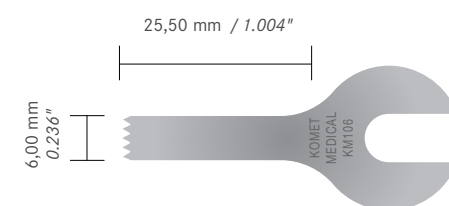

REF	KM106 STE	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	5	STERILE
REF	KM106	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	5	NON STERILE


Kompatible Anschlüsse
compatible connections:

Micro 100™ 5053-012
Micro E 5040-007


REF	KM005 STE	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	5	STERILE
REF	KM005	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	5	NON STERILE


Kompatible Anschlüsse
compatible connections:

Mini Driver (K220)

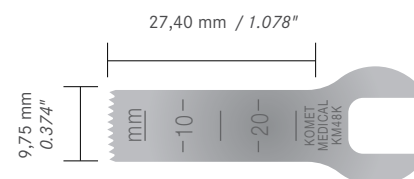

REF	KM48K STE	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	5	STERILE
REF	KM48K	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	5	NON STERILE

Alle Abbildungen in aktueller Größe (1:1)
All saw blades shown in actual size

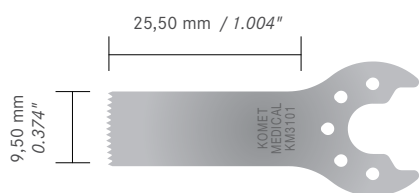
Kompatible Anschlüsse
compatible connections:Micro 100™ 5053-011
Micro Power™ 6020-022Micro Power™ 6021-022
Sagittal sawsMicroChoice, 5040-002,
Micro E 5020-022

REF

KM3101 STE

Blattstärke

0,40 mm

Material Thickness

0.016"

Schnittstärke

0,60 mm

Cutting Thickness

0.024"

REF

KM5023.124 STE

Blattstärke

0,40 mm

Material Thickness

0.016"

Schnittstärke

0,50 mm

Cutting Thickness

0.020"



REF

KM3101

Blattstärke

0,40 mm

Material Thickness

0.016"

Schnittstärke

0,60 mm

Cutting Thickness

0.024"

REF

KM5023.124

Blattstärke

0,40 mm

Material Thickness



0.016"

Schnittstärke

0,50 mm

Cutting Thickness

0.020"

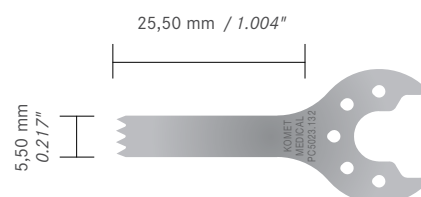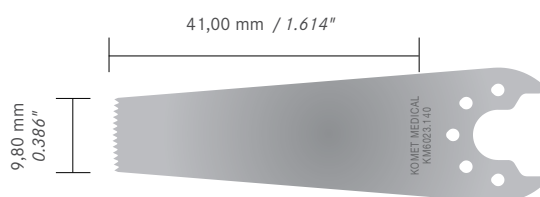

REF

KM6023.140 STE

Blattstärke

0,40 mm

Material Thickness

0.016"

Schnittstärke

0,60 mm

Cutting Thickness

0.024"

REF

PC5023.132 STE

Blattstärke

0,40 mm

Material Thickness

0.016"

Schnittstärke

0,60 mm

Cutting Thickness

0.024"



REF

KM6023.140

Blattstärke

0,40 mm

Material Thickness

0.016"

Schnittstärke

0,60 mm

Cutting Thickness

0.024"

REF

PC5023.132

Blattstärke

0,40 mm

Material Thickness



0.016"

Schnittstärke

0,60 mm

Cutting Thickness

0.024"

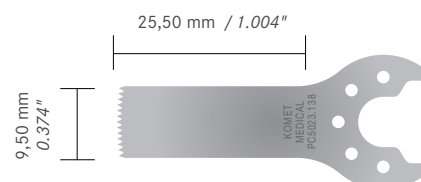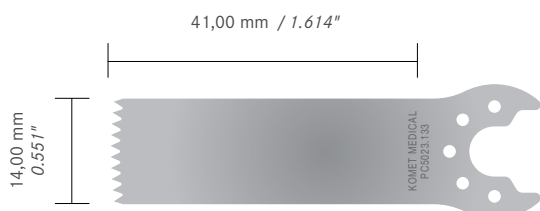

REF

PC5023.133 STE

Blattstärke

0,38 mm

Material Thickness

0.015"

Schnittstärke

0,60 mm

Cutting Thickness

0.024"

REF

PC5023.138 STE

Blattstärke

0,38 mm

Material Thickness

0.015"

Schnittstärke

0,60 mm

Cutting Thickness

0.024"



REF

PC5023.133

Blattstärke

0,38 mm

Material Thickness

0.015"

Schnittstärke

0,60 mm

Cutting Thickness

0.024"

REF

PC5023.138

Blattstärke

0,38 mm

Material Thickness



0.015"

Schnittstärke

0,60 mm

Cutting Thickness

0.024"

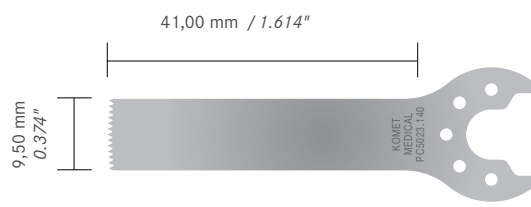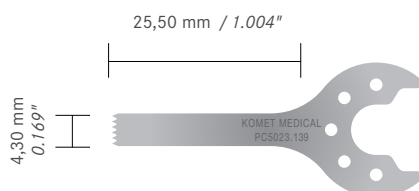

REF

PC5023.139 STE

Blattstärke

0,38 mm

Material Thickness

0.015"

Schnittstärke

0,60 mm

Cutting Thickness

0.024"

REF

PC5023.140 STE

Blattstärke

0,38 mm

Material Thickness

0.015"

Schnittstärke

0,60 mm

Cutting Thickness

0.024"



REF

PC5023.139

Blattstärke

0,38 mm

Material Thickness

0.015"

Schnittstärke

0,60 mm

Cutting Thickness

0.024"

REF

PC5023.140

Blattstärke

0,38 mm

Material Thickness

0.015"

Schnittstärke

0,60 mm


Cutting Thickness

0.024"





Kompatible Anschlüsse <i>compatible connections:</i>	Micro 100™ 5053-011 Micro Power™ 6020-022	Micro Power™ 6021-022 Sagittal saws	MicroChoice, 5040-002, Micro E 5020-022
---	--	--	--

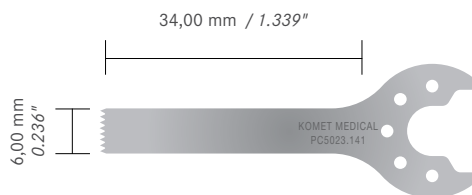

REF	PC5023.141 STE				
Blattstärke <i>Material Thickness</i>	0,38 mm 0.015"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"		
REF	PC5023.141				
Blattstärke <i>Material Thickness</i>	0,38 mm 0.015"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"		






Kompatible Anschlüsse
compatible connections:

MicroChoice 5020-023
Micro 100™ 5053-010

Micro E 5040-003




STERILE	REF	KM54 STE		
	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,40 mm 0.016"
	REF	KM54		
	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,40 mm 0.016"

Kompatible Anschlüsse
compatible connections:


MPower™ 2 Battery,
Sternum Saw Pro 6450M,
5059-006

Pneumatic Sternum Saw
5059-005

Hall 50 Sternum Saw
PRO7450B

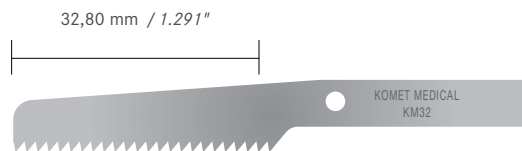

STERILE	REF	KM32 STE		
	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,10 mm 0.043"
	REF	KM32		
	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,10 mm 0.043"

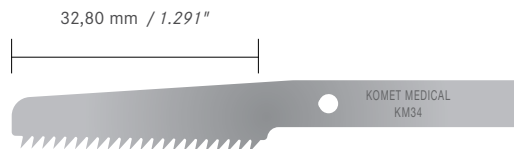


Aggressive

STERILE	REF	KM34 STE		
	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
	REF	KM34		
	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

Kompatible Anschlüsse
compatible connections:

Micro Power™ 6020-023,
Micro Power™ 6021-023,
Micro Choice 5053-023

Micro 100 5023-010,
Micro E 5040-003
reciprocating saw



STERILE	REF	KM060 STE		
	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"
	REF	KM060		
	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"





Kompatible Anschlüsse
compatible connections:
PowerPro Pneumatic
PRO6 185, PowerPro
Electric II PRO6 135,
PowerPro Max
PRO5400M, MPower 2
PRO6400M, MPower
PRO6400, Hall Serie 4
5067-003, Hall 50
PRO7400B reciprocating
saws.




neu
new

REF	KM252R.LI STE			
Blattstärke	1,00 mm	Schnittstärke	1,00 mm	
Material Thickness	0.039"	Cutting Thickness	0.039"	



STERILE

2

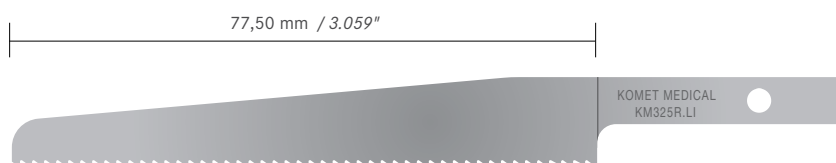


neu
new

REF	KM325R.LI STE			
Blattstärke	0,80 mm	Schnittstärke	1,05 mm	
Material Thickness	0.031"	Cutting Thickness	0.041"	



STERILE

2

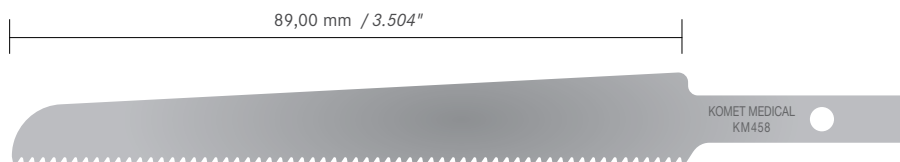


REF	KM458 STE			
Blattstärke	0,60 mm	Schnittstärke	1,10 mm	
Material Thickness	0.024"	Cutting Thickness	0.043"	



STERILE

2



REF	KM459 STE			
Blattstärke	0,60 mm	Schnittstärke	1,10 mm	
Material Thickness	0.024"	Cutting Thickness	0.043"	




STERILE

2







Kompatible Anschlüsse
compatible connections:
PowerPro Pneumatic
PRO6185, PowerPro
Electric II PRO6135,
PowerPro Max
PRO5400M, MPower 2
PRO6400M, MPower
PRO6400, Hall Serie 4
5067-003, Hall 50
PRO7400B reciprocating
saws.

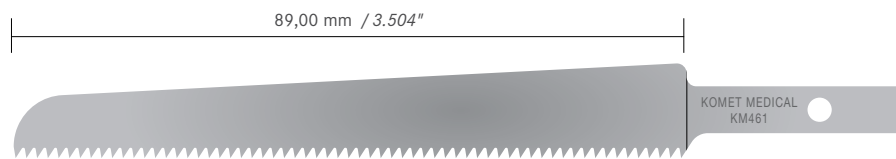

STERILE ②	5	REF	KM461 STE		
		Blattstärke	1,20 mm	Schnittstärke	1,70 mm
		Material Thickness	0.047"	Cutting Thickness	0.067"

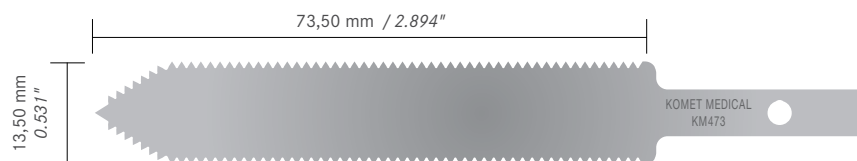


STERILE ②	51	REF	KM473 STE		
		Blattstärke	0,60 mm	Schnittstärke	1,00 mm
		Material Thickness	0.024"	Cutting Thickness	0.039"

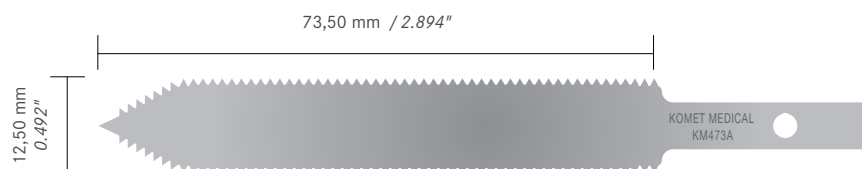

**neu
new**

STERILE ②	51	REF	KM473A STE		
		Blattstärke	0,60 mm	Schnittstärke	1,00 mm
		Material Thickness	0.024"	Cutting Thickness	0.039"

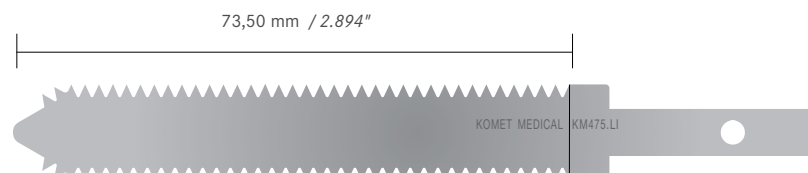


STERILE ②	51	REF	KM475.LI STE		
		Blattstärke	1,27 mm	Schnittstärke	1,27 mm
		Material Thickness	0.050"	Cutting Thickness	0.050"






Kompatible Anschlüsse
compatible connections:
PowerPro Pneumatic
PRO6 185, PowerPro
Electric II PRO6 135,
PowerPro Max
PRO5400M, MPower 2
PRO6400M, MPower
PRO6400, Hall Serie 4
5067-003, Hall 50
PRO7400B reciprocating
saws.

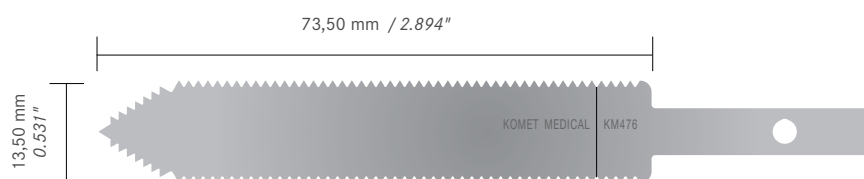

REF	KM476 STE			
Blattstärke	1,00 mm	Schnittstärke	1,20 mm	
Material Thickness	0.039"	Cutting Thickness	0.047"	



STERILE

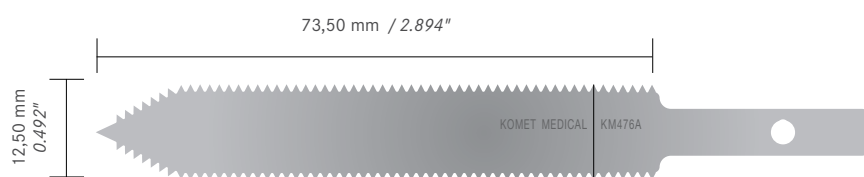

neu
new

REF	KM476A STE			
Blattstärke	1,00 mm	Schnittstärke	1,20 mm	
Material Thickness	0.039"	Cutting Thickness	0.047"	



STERILE






EZblade®

steril verpackte Sägeblätter für den Mehrfachgebrauch
sterile packed saw blades for multiple use

DeSoutter

Kompatible Anschlüsse
compatible connections:
MDX Multi Drive KX 600
MDX Multi Drive KDX-600
MPX Multi Drive SX 500
MPX Multi Drive DPX-676
MCX Multi Drive DCX 500
Orthodrive DBK-700

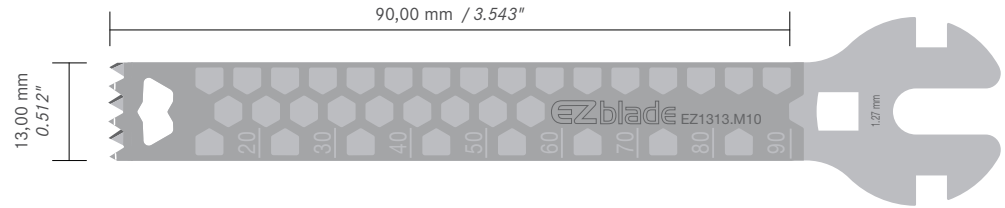

REF

Schnittstärke
Cutting Thickness

EZ1310.M10 STE


1,00 mm
0.039"

EZ1313.M10 STE

1,27 mm
0.050"

EZ1314.M10 STE

1,37 mm
0.054"

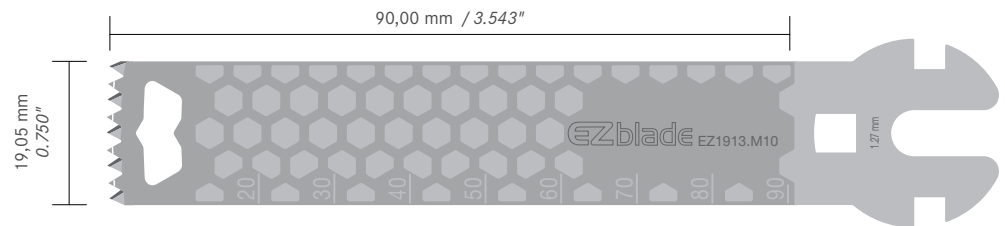

REF


Schnittstärke
Cutting Thickness

EZ1913.M10 STE

1,27 mm
0.050"

EZ1914.M10 STE

1,37 mm
0.054"

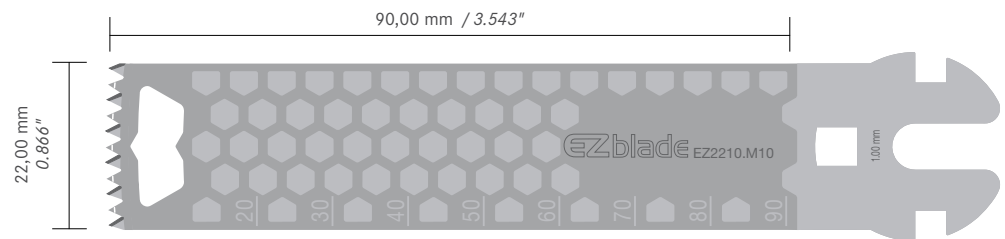

REF

Schnittstärke
Cutting Thickness

EZ2210.M10 STE

1,00 mm
0.039"

EZ2213.M10 STE


1,27 mm
0.050"

EZ2214.M10 STE


1,37 mm
0.054"




Kompatible Anschlüsse
compatible connections:
MDX Multi Drive KX 600
MDX Multi Drive KDX-600
MPX Multi Drive SX 500
MPX Multi Drive DPX-676
MCX Multi Drive DCX 500
Orthodrive DBK-700

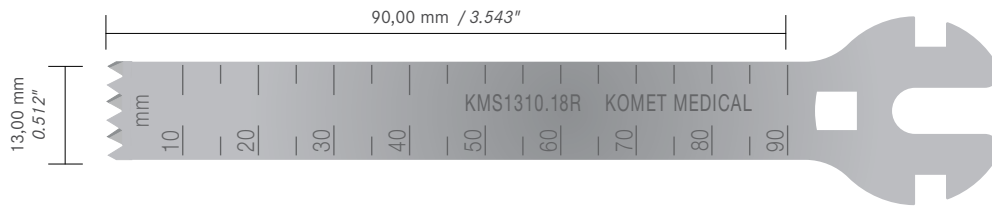


REF	KMS1310.18R STE	KMS1312.M10 STE	KMS1313.17S STE				
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,19 mm 0.047"	1,27 mm 0.050"				

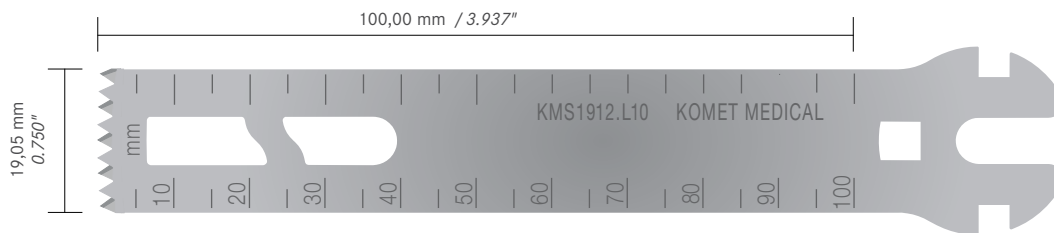

REF	KMS1912.L10 STE						
Schnittstärke Cutting Thickness	1,19 mm 0.047"						

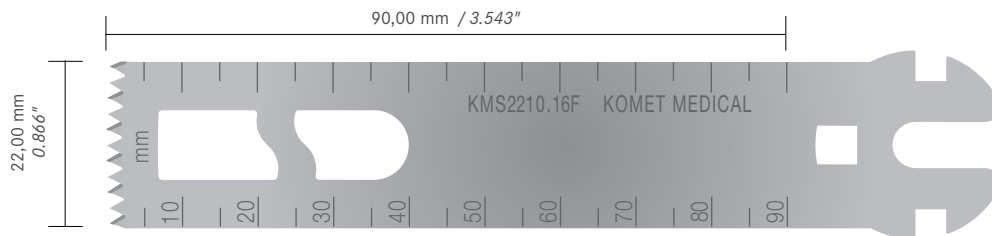

REF	KMS2210.16F STE	KMS2213.17F STE					
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,27 mm 0.050"					

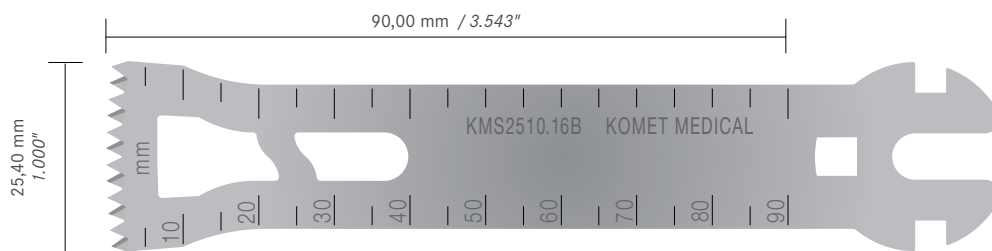

REF	KMS2510.16B STE	KMS2512.15J STE	KMS2513.15S STE	KMS2514.15T STE	KMS2515.15I STE		
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,19 mm 0.047"	1,27 mm 0.050"	1,37 mm 0.054"	1,47 mm 0.058"		






DeSoutter

Kompatible Anschlüsse
compatible connections:
MDX Multi Drive KX 600
MDX Multi Drive KDX-600
MPX Multi Drive SX 500
MPX Multi Drive DPX-676
MCX Multi Drive DCX 500
Orthodrive DBK-700

KMS  

steril verpackte Sägeblätter für den Einmalgebrauch
sterile packed saw blades for single use

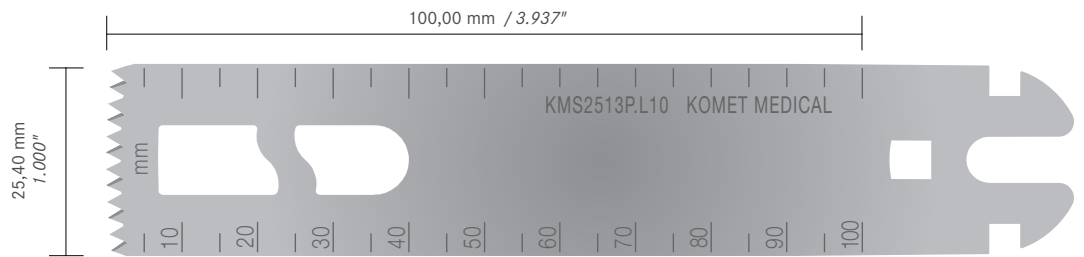

REF

Schnittstärke

Cutting Thickness

KMS2513P.L10 STE

1,27 mm

0.050"

**neu
new**




EVOLUTION
unsteril verpackte Sägeblätter für den Mehrfachgebrauch
nonsterile packed saw blades for multiple use




DeSoutter

Kompatible Anschlüsse
compatible connections:
MDX Multi Drive KX 600
MDX Multi Drive KDX-600
MPX Multi Drive SX 500
MPX Multi Drive DPX-676
MCX Multi Drive DCX 500
Orthodrive DBK-700

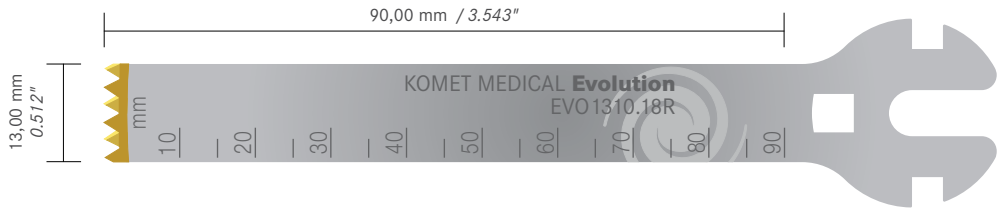

REF	EVO1310.18R	EVO1313.17S					
Schnittstärke	1,00 mm	1,27 mm					
Cutting Thickness	0.039"	0.050"					
							 

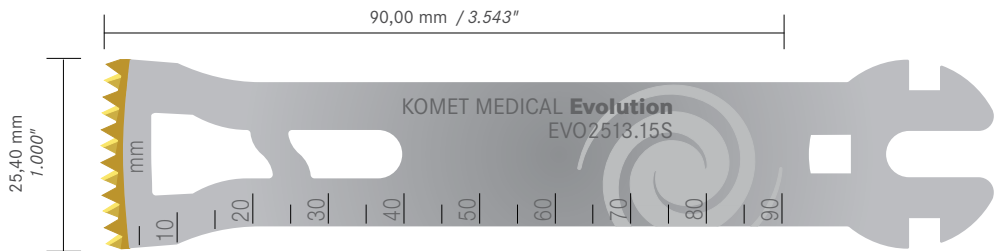


REF	EVO2510.16B	EVO2512.15J	EVO2513.15S				
Schnittstärke	1,00 mm	1,19 mm	1,27 mm				
Cutting Thickness	0.039"	0.047"	0.050"				
							 







Kompatible Anschlüsse
compatible connections:
MDX Multi Drive KX 600
MDX Multi Drive KDX-600
MPX Multi Drive SX 500
MPX Multi Drive DPX-676
MCX Multi Drive DCX 500
Orthodrive DBK-700

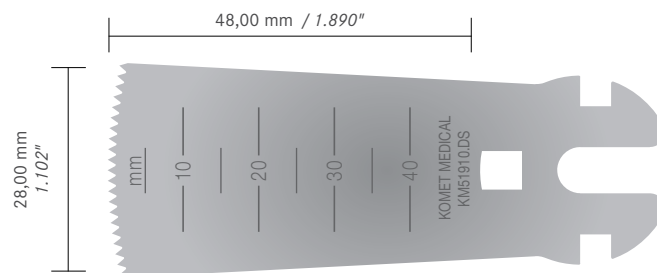


STERILE	REF	KM51910.DS STE		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"
	REF	KM51910.DS		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"

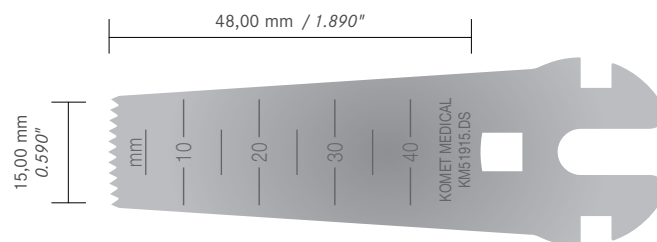

STERILE	REF	KM51915.DS STE		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"
	REF	KM51915.DS		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"

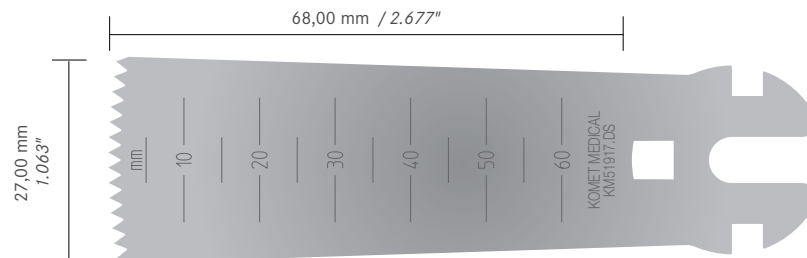

STERILE	REF	KM51917.DS STE		
	Blattstärke	0,60 mm	Schnittstärke	0,80 mm
	Material Thickness	0.024"	Cutting Thickness	0.031"
	REF	KM51917.DS		
	Blattstärke	0,60 mm	Schnittstärke	0,80 mm
	Material Thickness	0.024"	Cutting Thickness	0.031"

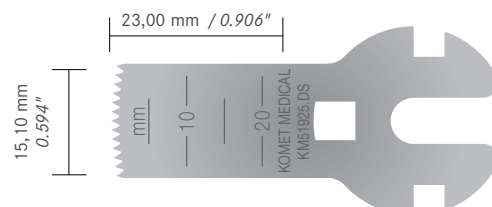

STERILE	REF	KM51925.DS STE		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"
	REF	KM51925.DS		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"




Kompatible Anschlüsse
compatible connections:
CX 600, DPX 673




neu
new

REF	KM252R.LI STE			
Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,00 mm 0.039"	5 STERILE 2

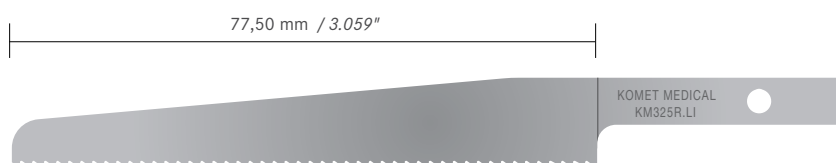


neu
new

REF	KM325R.LI STE			
Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,05 mm 0.041"	5 STERILE 2

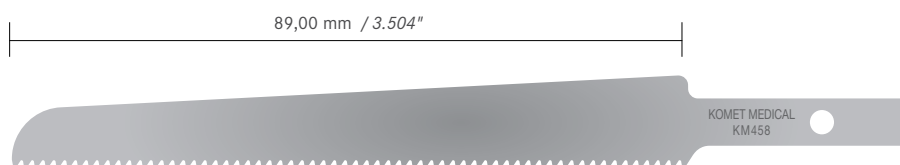

REF	KM458 STE			
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,10 mm 0.043"	5 STERILE 2




REF	KM459 STE			
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,10 mm 0.043"	5 STERILE 2







Kompatible Anschlüsse
compatible connections:
CX 600, DPX 673

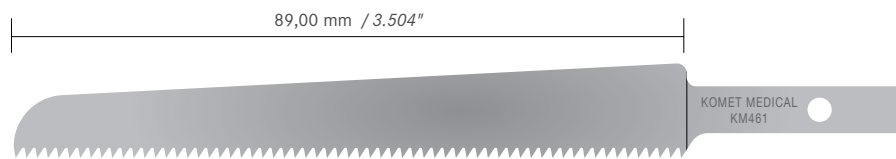

STERILE ②	5	REF	KM461 STE		
		Blattstärke	1,20 mm	Schnittstärke	1,70 mm
		Material Thickness	0.047"	Cutting Thickness	0.067"

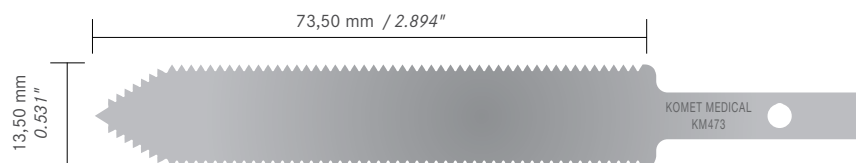


STERILE ②	5	REF	KM473 STE		
		Blattstärke	0,60 mm	Schnittstärke	1,00 mm
		Material Thickness	0.024"	Cutting Thickness	0.039"

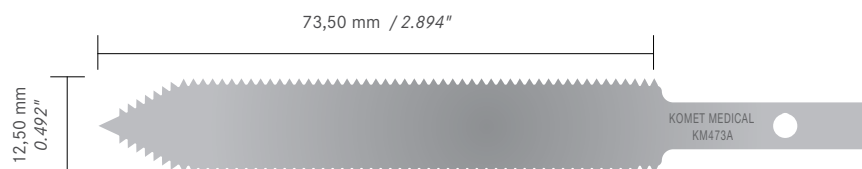

**neu
new**

STERILE ②	5	REF	KM473A STE		
		Blattstärke	0,60 mm	Schnittstärke	1,00 mm
		Material Thickness	0.024"	Cutting Thickness	0.039"

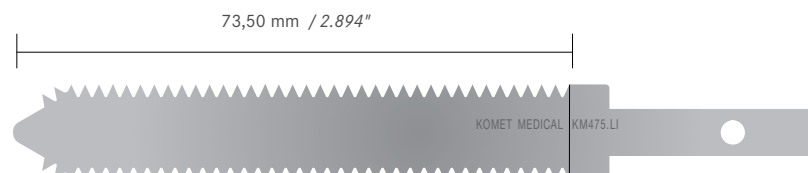


STERILE ②	5	REF	KM475.LI STE		
		Blattstärke	1,27 mm	Schnittstärke	1,27 mm
		Material Thickness	0.050"	Cutting Thickness	0.050"






Kompatible Anschlüsse
compatible connections:
CX 600, DPX 673

DeSautter

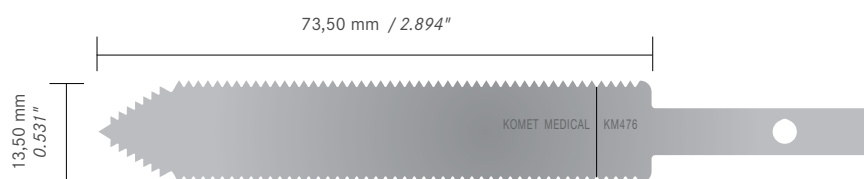

REF	KM476 STE				
Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"		

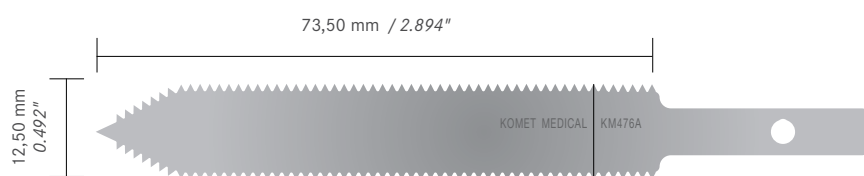

neu
new

REF	KM476A STE				
Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"		






EZblade®

steril verpackte Sägeblätter für den Mehrfachgebrauch
sterile packed saw blades for multiple use

MicroAire

Kompatible Anschlüsse
compatible connections:
Series 7000

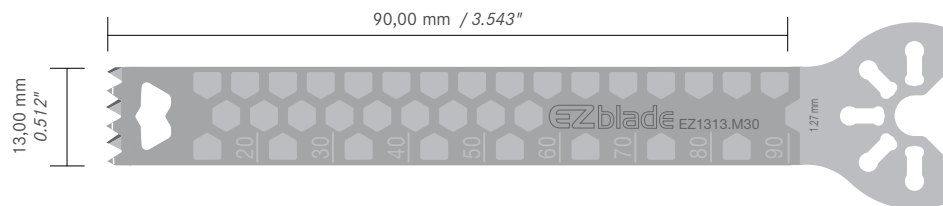

REF

Schnittstärke
Cutting Thickness

EZ1310.M30 STE


1,00 mm
0.039"

EZ1313.M30 STE

1,27 mm
0.050"

EZ1314.M30 STE

1,37 mm
0.054"

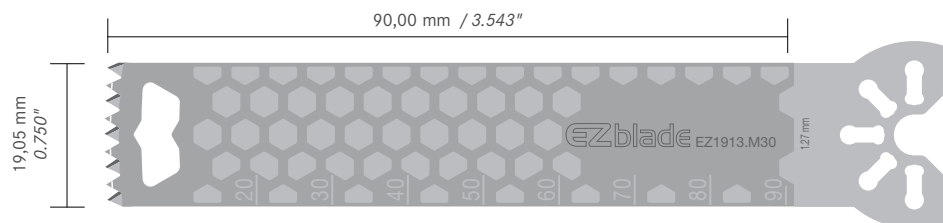

REF


Schnittstärke
Cutting Thickness

EZ1913.M30 STE

1,27 mm
0.050"

EZ1914.M30 STE

1,37 mm
0.054"

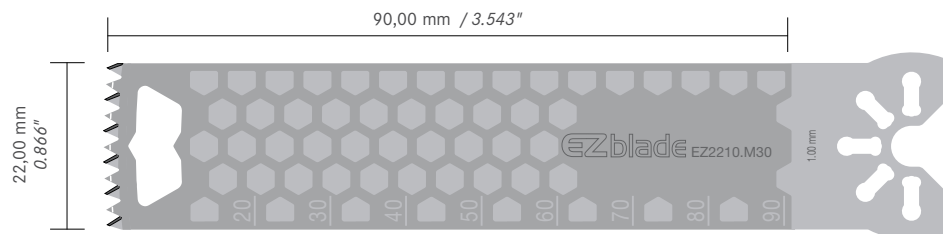

REF

Schnittstärke
Cutting Thickness


EZ2210.M30 STE

1,00 mm
0.039"


EZ2213.M30 STE

1,27 mm
0.050"




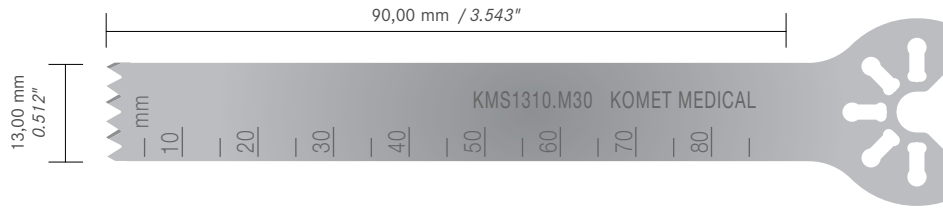


REF	KMS1310.M30 STE	KMS1313.M30 STE					
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,27 mm 0.050"					

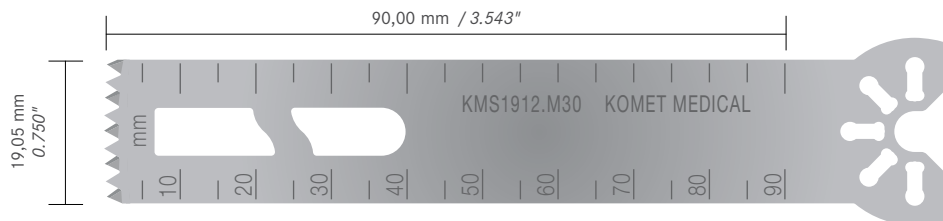

REF	KMS1909.M30 STE	KMS1912.M30 STE	KMS1913.31S STE	KMS1914.M30 STE			
Schnittstärke Cutting Thickness	0,89 mm 0.035"	1,19 mm 0.047"	1,27 mm 0.050"	1,37 mm 0.054"			

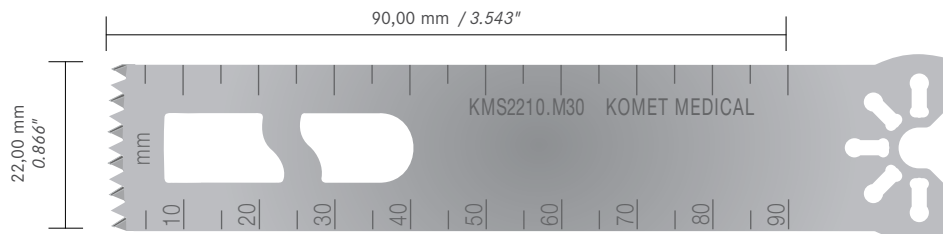

REF	KMS2210.M30 STE	KMS2213.M30 STE					
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,27 mm 0.050"					

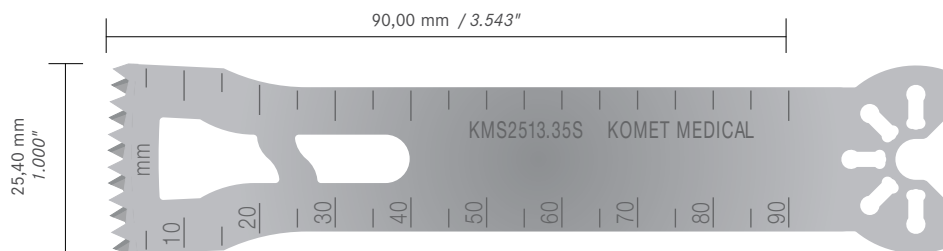


REF	KMS2513.35S STE	KMS2514.M30 STE	KMS2515.35I STE				
Schnittstärke Cutting Thickness	1,27 mm 0.050"	1,37 mm 0.054"	1,47 mm 0.058"				





MicroAire

Kompatible Anschlüsse
compatible connections:
Series 7000

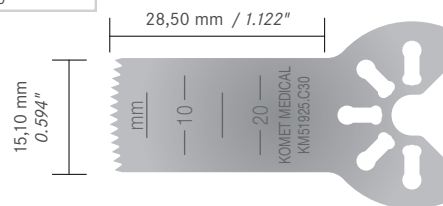


STERILE	REF	KM51925.C30STE		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"

NON STERILE	REF	KM51925.C30		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"

Kompatible Anschlüsse
compatible connections:

1975, 1976 oscillating saws




STERILE	REF	KM3002 STE		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"

NON STERILE	REF	KM3002		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"

REF	KM3005 STE		
Blattstärke	0,40 mm	Schnittstärke	0,60 mm
Material Thickness	0.016"	Cutting Thickness	0.024"

REF	KM3005		
Blattstärke	0,40 mm	Schnittstärke	0,60 mm
Material Thickness	0.016"	Cutting Thickness	0.024"





STERILE	REF	KM3006 STE		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"

NON STERILE	REF	KM3006		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"

Kompatible Anschlüsse
compatible connections:

1950, 1955, 2250, 6670,
6672, 6673 sagittal saw

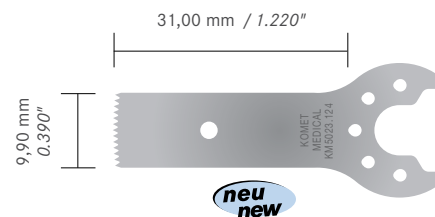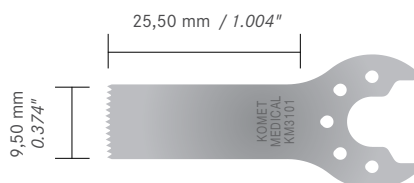

STERILE	REF	KM3101 STE		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"



NON STERILE	REF	KM3101		
	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
	Material Thickness	0.016"	Cutting Thickness	0.024"

REF	KM5023.124 STE		
Blattstärke	0,40 mm	Schnittstärke	0,50 mm
Material Thickness	0.016"	Cutting Thickness	0.020"



REF	KM5023.124		
Blattstärke	0,40 mm	Schnittstärke	0,50 mm
Material Thickness	0.016"	Cutting Thickness	0.020"





Kompatible Anschlüsse
compatible connections:

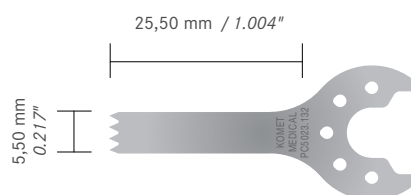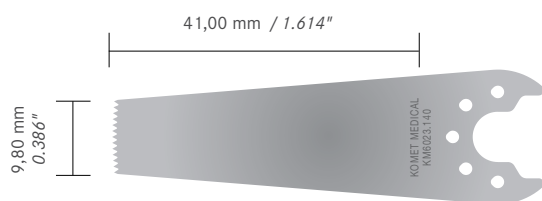1950, 1955, 2250, 6670,
6672, 6673 sagittal saw


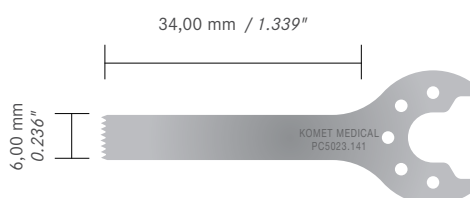
REF	KM6023.140 STE	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	REF	PC5023.132 STE	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		STERILE
REF	KM6023.140	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	REF	PC5023.132	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		NON STERILE

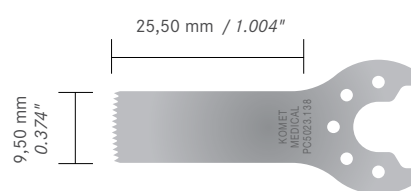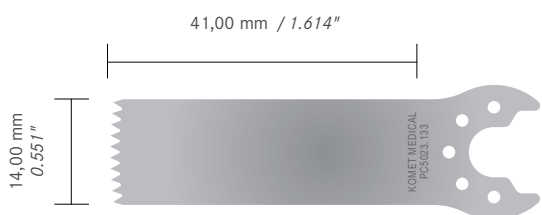

REF	PC5023.133 STE	Blattstärke Material Thickness	0,38 mm 0.015"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	REF	PC5023.138 STE	Blattstärke Material Thickness	0,38 mm 0.015"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		STERILE
REF	PC5023.133	Blattstärke Material Thickness	0,38 mm 0.015"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	REF	PC5023.138	Blattstärke Material Thickness	0,38 mm 0.015"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		NON STERILE

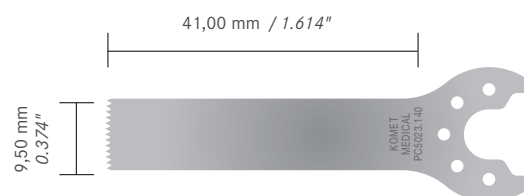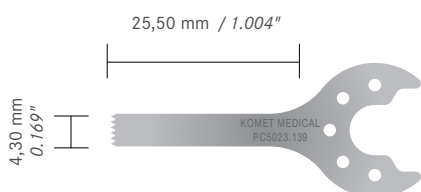

REF	PC5023.139 STE	Blattstärke Material Thickness	0,38 mm 0.015"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	REF	PC5023.140 STE	Blattstärke Material Thickness	0,38 mm 0.015"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		STERILE
REF	PC5023.139	Blattstärke Material Thickness	0,38 mm 0.015"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	REF	PC5023.140	Blattstärke Material Thickness	0,38 mm 0.015"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		NON STERILE



REF	PC5023.141 STE	Blattstärke Material Thickness	0,38 mm 0.015"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	REF	PC5023.141	Blattstärke Material Thickness	0,38 mm 0.015"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		STERILE
REF	PC5023.141	Blattstärke Material Thickness	0,38 mm 0.015"	Schnittstärke Cutting Thickness	0,60 mm 0.024"	REF	PC5023.141	Blattstärke Material Thickness	0,38 mm 0.015"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		NON STERILE

Alle Abbildungen in aktueller Größe (1:1)
All saw blades shown in actual size





Kompatible Anschlüsse
compatible connections:
Series 7000




neu
new

STERILE ②	5	REF	KM252R.LI STE		
		Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

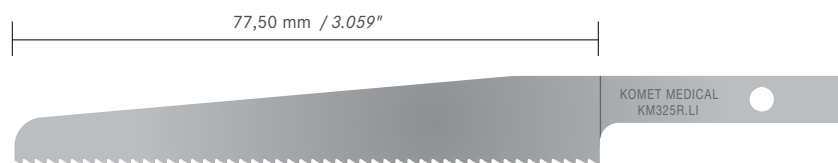


neu
new

STERILE ②	5	REF	KM325R.LI STE		
		Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,05 mm 0.041"

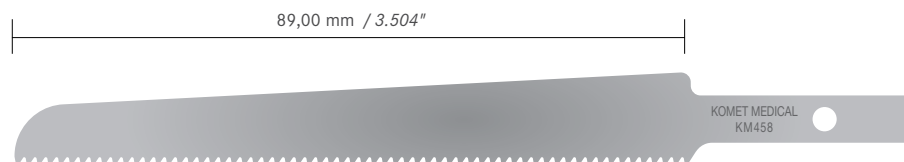


STERILE ②	5	REF	KM458 STE		
		Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,10 mm 0.043"



STERILE ②	5	REF	KM459 STE		
		Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,10 mm 0.043"



Kompatible Anschlüsse
compatible connections:
Series 7000

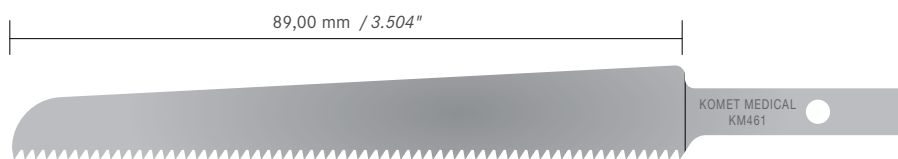

REF

Blattstärke
Material Thickness

KM461 STE


1,20 mm
0.047"

Schnittstärke
Cutting Thickness

1,70 mm
0.067"



STERILE

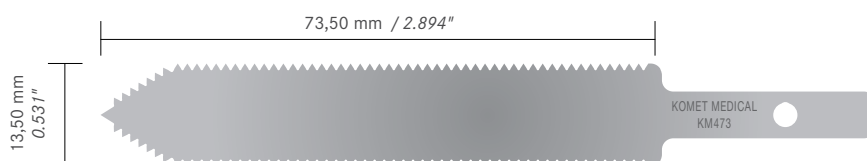

REF

Blattstärke
Material Thickness

KM473 STE


0,60 mm
0.024"

Schnittstärke
Cutting Thickness

1,00 mm
0.039"



STERILE

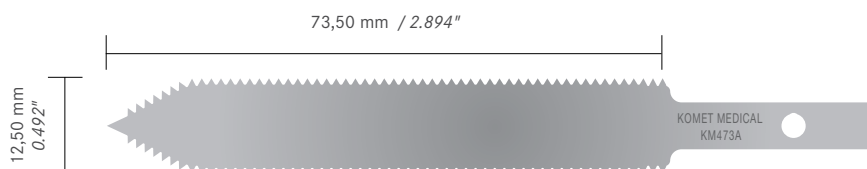

neu
new

REF

Blattstärke
Material Thickness

KM473A STE


0,60 mm
0.024"

Schnittstärke
Cutting Thickness

1,00 mm
0.039"



STERILE

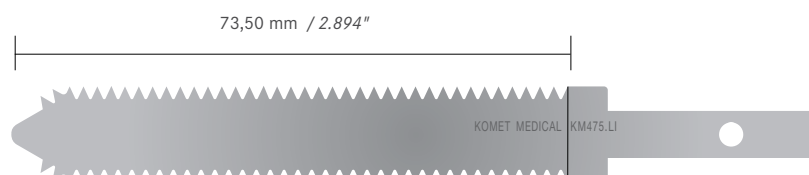

REF

Blattstärke
Material Thickness

KM475.LI STE

1,27 mm
0.050"

Schnittstärke
Cutting Thickness

1,27 mm
0.050"




STERILE






MicroAire

Kompatible Anschlüsse
compatible connections:
Series 7000

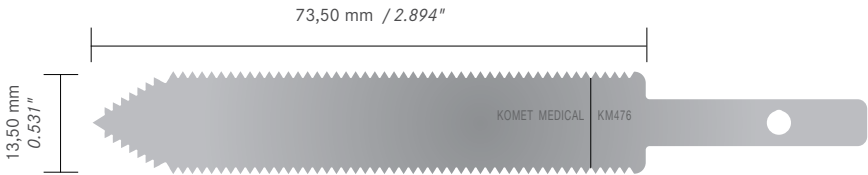

STERILE ②	5	REF	KM476 STE		
		Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"

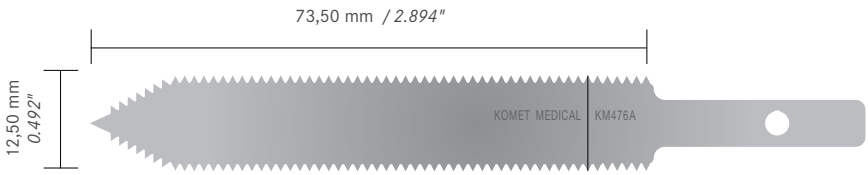


neu
new

STERILE ②	5	REF	KM476A STE		
		Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"




Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

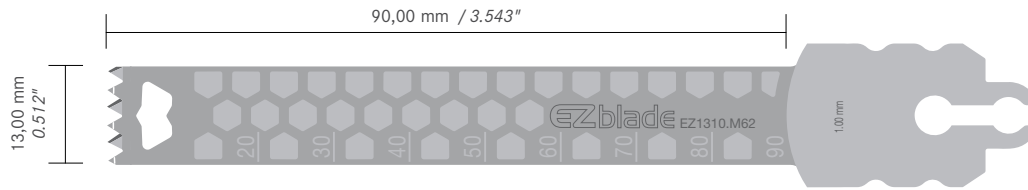

REF	EZ1310.M62 STE	EZ1312.M62 STE	EZ1313.M62 STE	EZ1314.M62 STE	
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,19 mm 0.047"	1,27 mm 0.050"	1,37 mm 0.054"	




STERILE

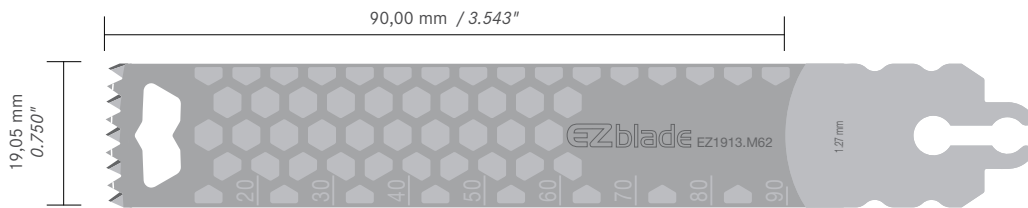

REF	EZ1912.M62 STE	EZ1913.M62 STE	EZ1914.M62 STE		
Schnittstärke Cutting Thickness	1,19 mm 0.047"	1,27 mm 0.050"	1,37 mm 0.054"		




STERILE

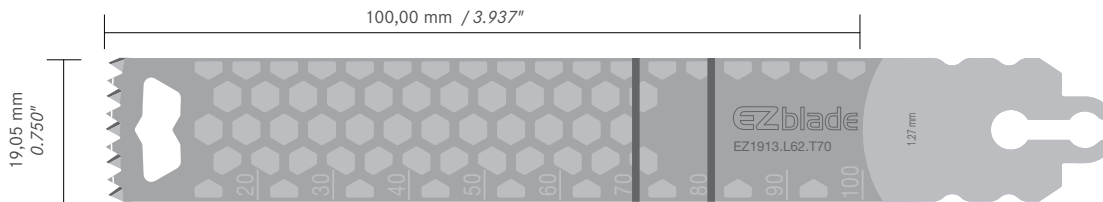

REF	EZ1913.L62.T70 STE				
Schnittstärke Cutting Thickness	1,27 mm 0.050"				



STERILE

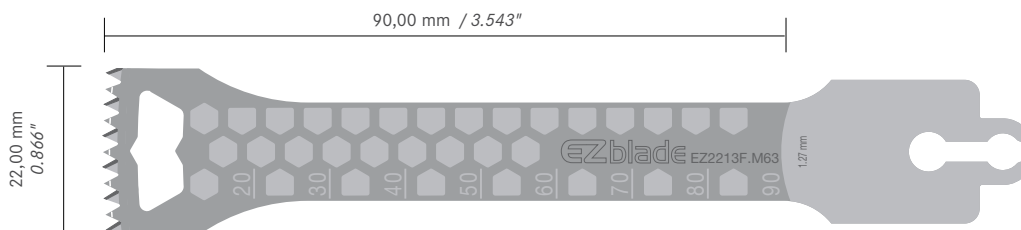neu
newneu
new

REF	EZ2212F.M63 STE	EZ2213F.M63 STE			
Schnittstärke Cutting Thickness	1,19 mm 0.047"	1,27 mm 0.050"			



STERILE






EZblade®


steril verpackte Sägeblätter für den Mehrfachgebrauch
sterile packed saw blades for multiple use

Stryker


Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

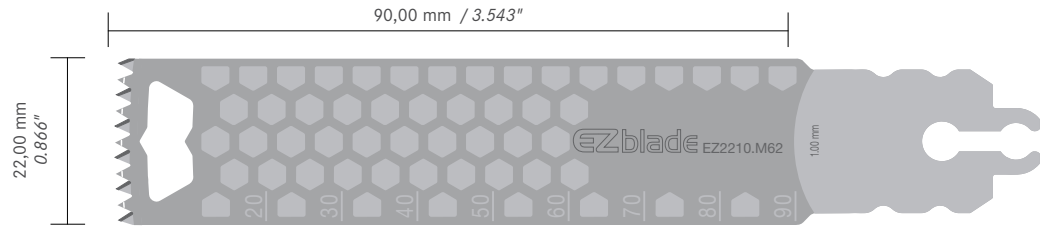


STERILE	1	REF	EZ2210.M62 STE	EZ2212.M62 STE	EZ2213.M62 STE	EZ2214.M62 STE	EZ2215.M62 STE	
		Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,19 mm 0.047"	1,27 mm 0.050"	1,37 mm 0.054"	1,47 mm 0.058"	

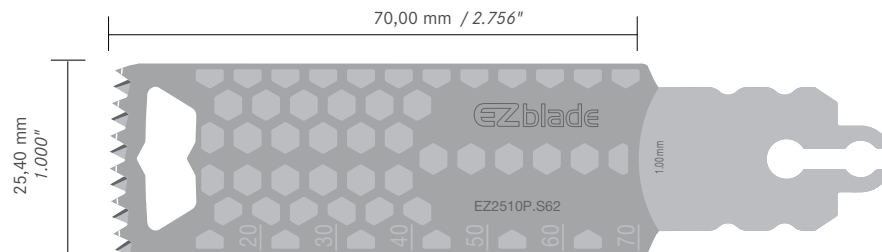

STERILE	1	REF	EZ2510P.S62 STE					
		Schnittstärke Cutting Thickness	1,00 mm 0.039"					

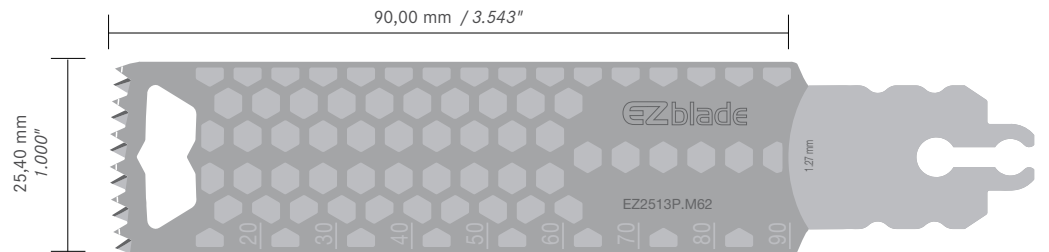

STERILE	1	REF	EZ2513P.M62 STE					
		Schnittstärke Cutting Thickness	1,27 mm 0.050"					

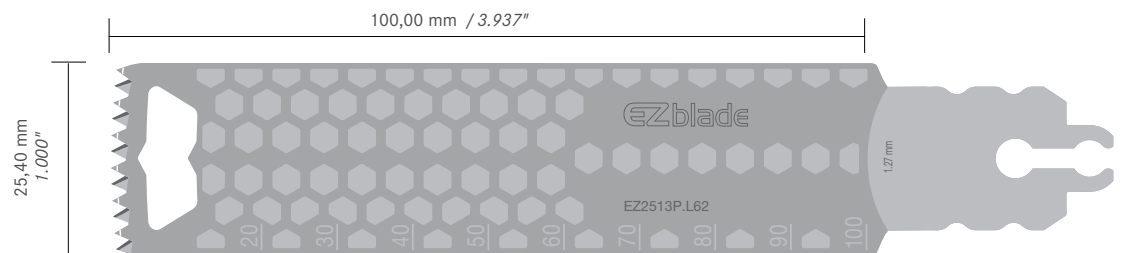


STERILE	1	REF	EZ2513P.L62 STE					
		Schnittstärke Cutting Thickness	1,27 mm 0.050"					




Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)


Stryker

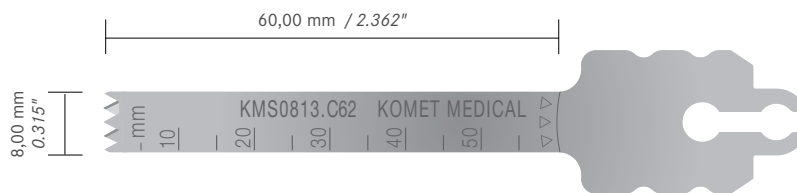

REF KMS0813.C62 STE
Schnittstärke 1,27 mm
Cutting Thickness 0.050"

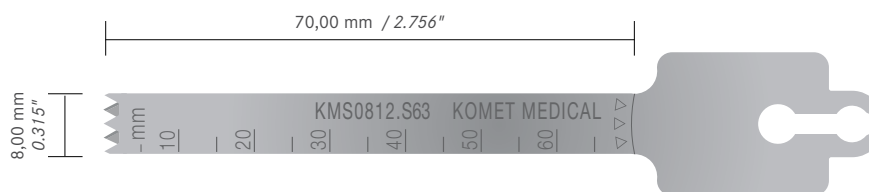


REF KMS0812.S63 STE
Schnittstärke 1,19 mm
Cutting Thickness 0.047"

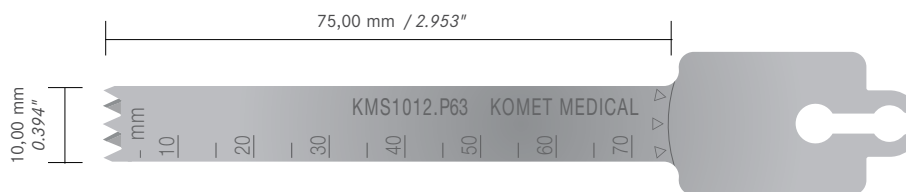

neu
new

REF KMS1012.P63 STE
Schnittstärke 1,19 mm
Cutting Thickness 0.047"

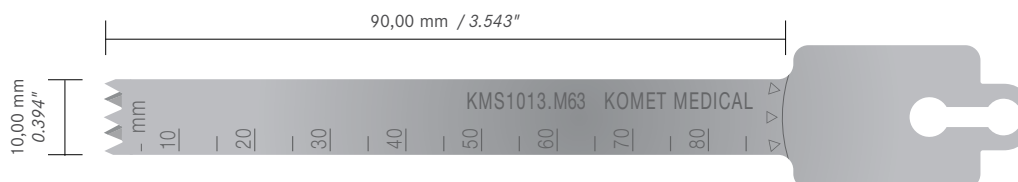

neu
new

REF KMS1013.M63 STE
Schnittstärke 1,27 mm
Cutting Thickness 0.050"






KMS  

steril verpackte Sägeblätter für den Einmalgebrauch
sterile packed saw blades for single use

Stryker

Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

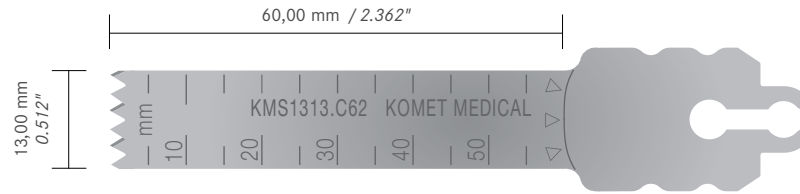


REF

Schnittstärke
Cutting Thickness

KMS1313.C62 STE

1,27 mm
0.050"

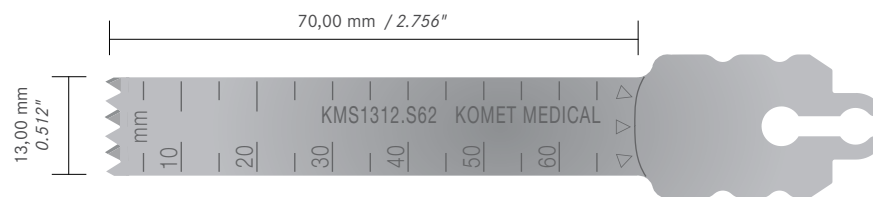

REF


Schnittstärke
Cutting Thickness

KMS1312.S62 STE

1,19 mm
0.047"

KMS1313.S62 STE

1,27 mm
0.050"

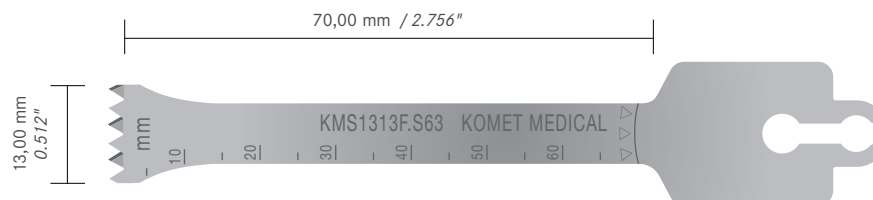


REF

Schnittstärke
Cutting Thickness

KMS1313F.S63 STE

1,27 mm
0.050"

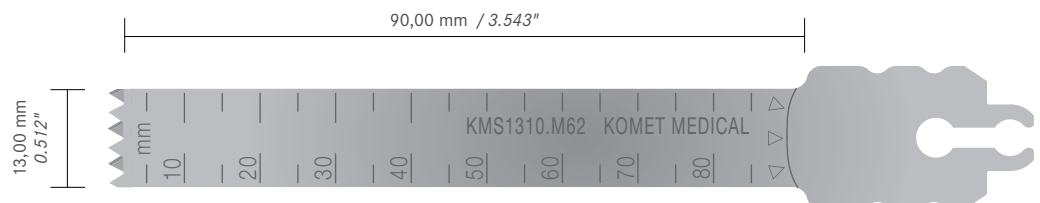

REF

Schnittstärke
Cutting Thickness

KMS1309.M62 STE

0,89 mm
0.035"

KMS1395.M62 STE

0,95 mm
0.037"

KMS1310.M62 STE

1,00 mm
0.039"

KMS1312.M62 STE


1,19 mm
0.047"

KMS1313.M62 STE


1,27 mm
0.050"




Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

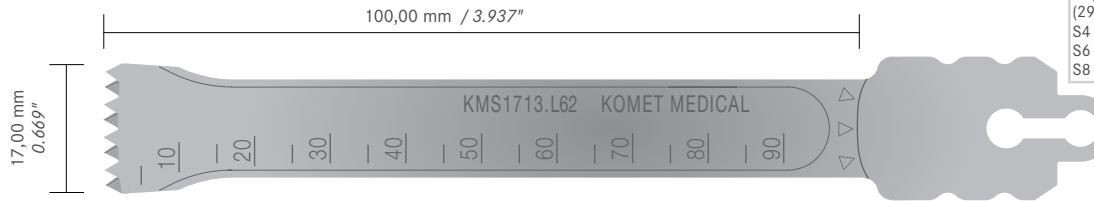


REF	KMS1713.L62 STE	KMS1714.L62 STE					
Schnittstärke Cutting Thickness	1,27 mm 0.050"	1,37 mm 0.054"					

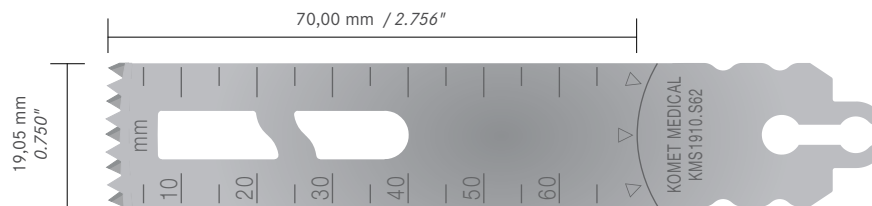

REF	KMS1910.S62 STE	KMS1913.S62 STE					
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,27 mm 0.050"					

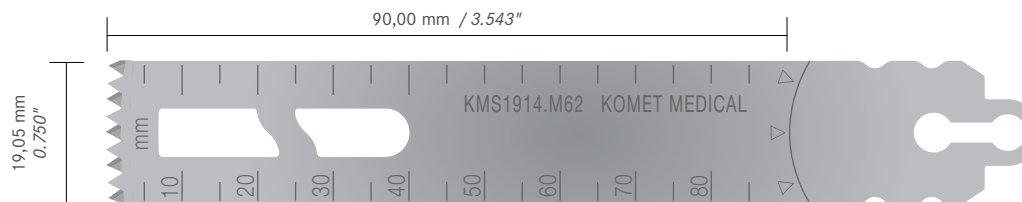

REF	KMS1909.M62 STE	KMS1910.M62 STE	KMS1913.M62 STE	KMS1914.M62 STE			
Schnittstärke Material Thickness	0,89 mm 0.035"	1,00 mm 0.039"	1,27 mm 0.050"	1,37 mm 0.054"			

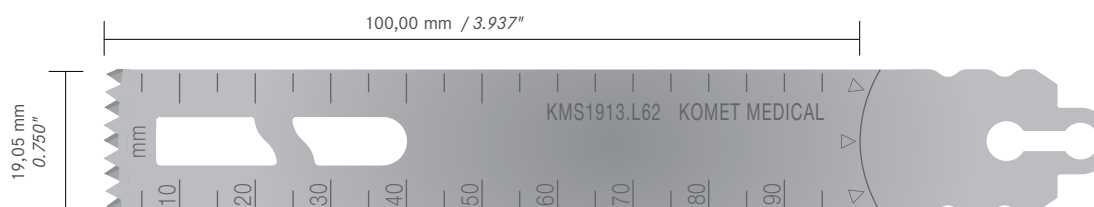

REF	KMS1995.L62 STE	KMS1912.L62 STE	KMS1913.L62 STE				
Schnittstärke Material Thickness	0,95 mm 0.037"	1,19 mm 0.047"	1,27 mm 0.050"				






Stryker


KMS  

steril verpackte Sägeblätter für den Einmalgebrauch
sterile packed saw blades for single use


Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

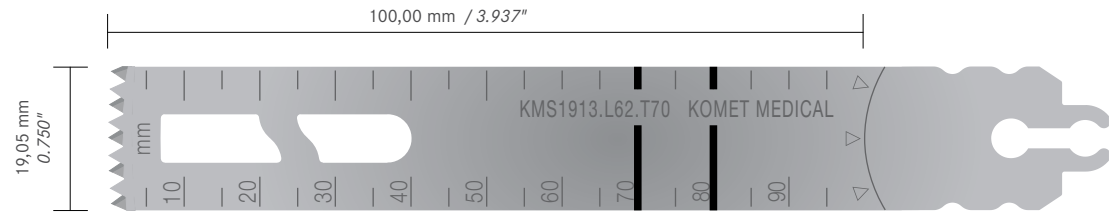


		REF	KMS1913.L62.T70 STE					
		Schnittstärke Cutting Thickness	1,27 mm 0.050"					

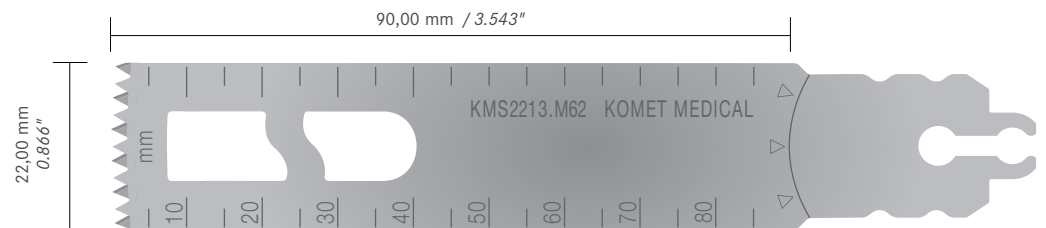

		REF	KMS2210.M62 STE	KMS2213.M62 STE				
		Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,27 mm 0.050"				

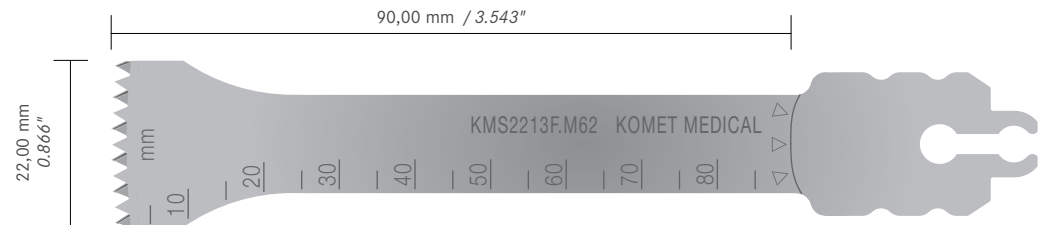


		REF	KMS2295F.M62 STE	KMS2212F.M62 STE	KMS2213F.M62 STE			
		Schnittstärke Cutting Thickness	0,95 mm 0.037"	1,19 mm 0.047"	1,27 mm 0.050"			

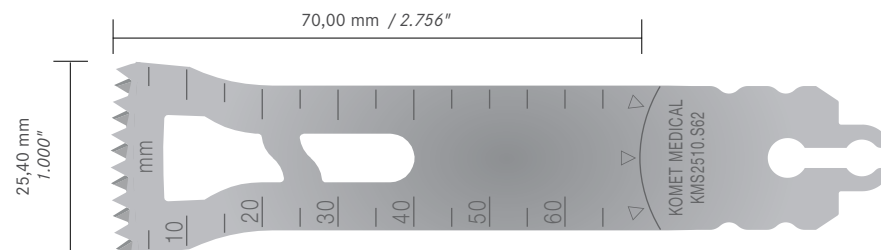


		REF	KMS2510.S62 STE					
		Schnittstärke Cutting Thickness	1,00 mm 0.039"					



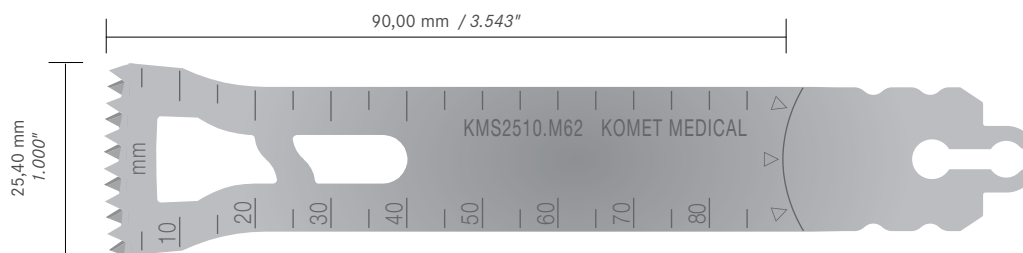


Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)


REF	KMS2509.M62 STE	KMS2595.M62 STE	KMS2510.M62 STE	KMS2512.M62 STE	KMS2513.M62 STE
Schnittstärke Cutting Thickness	0,89 mm 0.035"	0,95 mm 0.037"	1,00 mm 0.039"	1,19 mm 0.047"	1,27 mm 0.050"

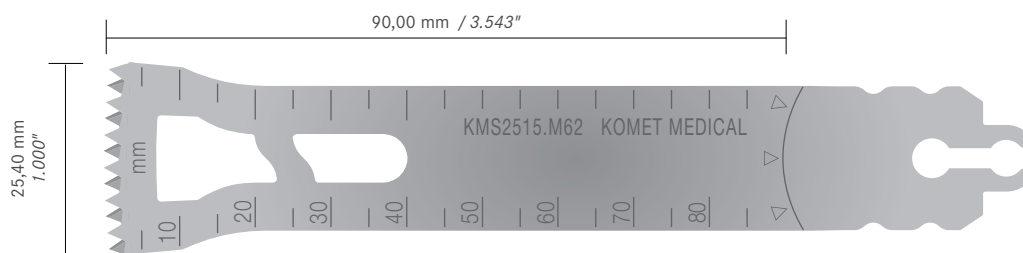

REF	KMS2514.M62 STE	KMS2515.M62 STE
Schnittstärke Cutting Thickness	1,37 mm 0.054"	1,47 mm 0.058"

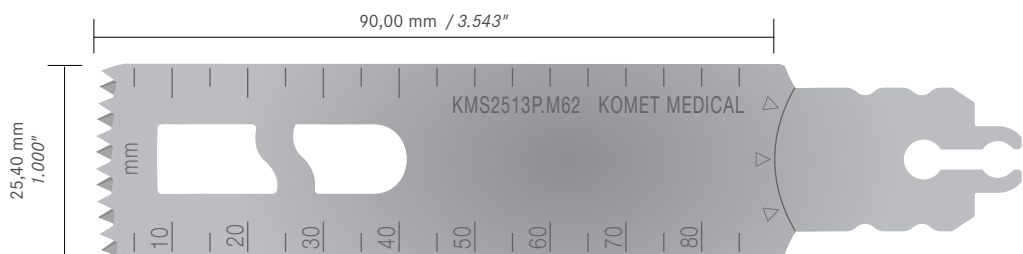

REF	KMS2512P.M62 STE	KMS2513P.M62 STE
Schnittstärke Cutting Thickness	1,19 mm 0.047"	1,27 mm 0.050"

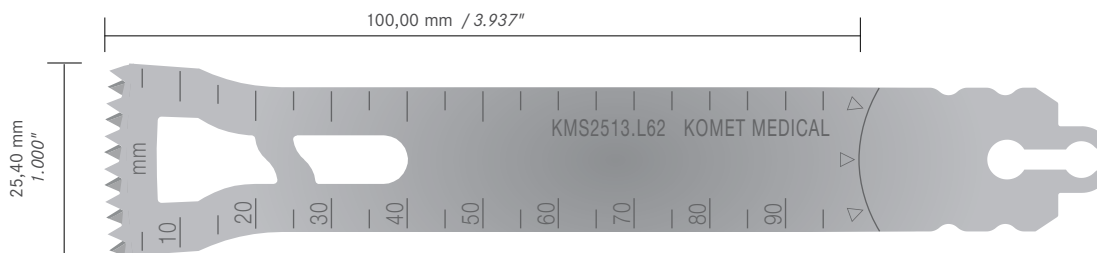

REF	KMS2513.L62 STE	KMS2514.L62 STE
Schnittstärke Cutting Thickness	1,27 mm 0.050"	1,37 mm 0.054"






EVOLUTION

unsteril verpackte Sägeblätter für den Mehrfachgebrauch
nonsterile packed saw blades for multiple use

Stryker


Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

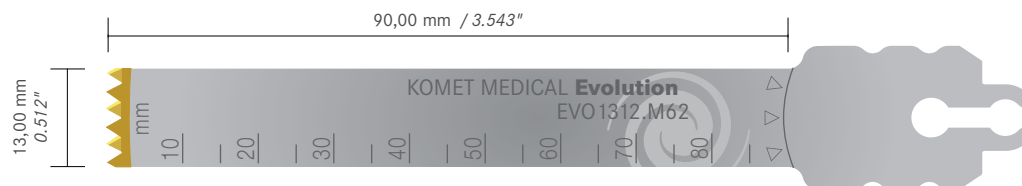

REF
Schnittstärke
Cutting Thickness


EVO1312.M62
1,19 mm
0.047"

EVO1313.M62
1,27 mm
0.050"

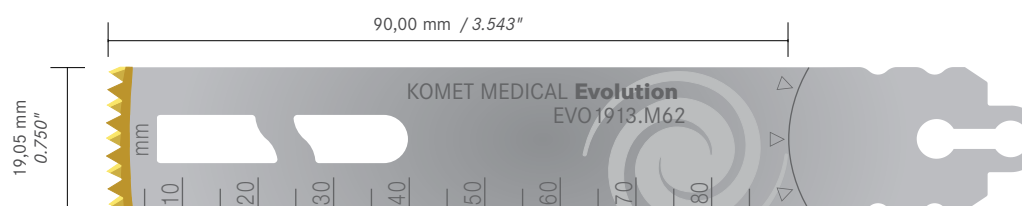

REF
Schnittstärke
Cutting Thickness

EVO1913.M62
1,27 mm
0.050"

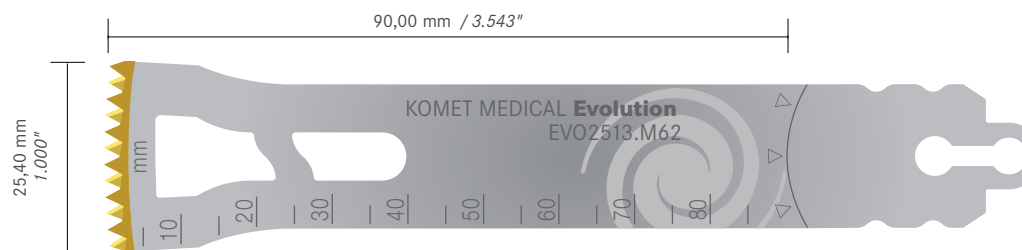


REF
Schnittstärke
Cutting Thickness

EVO2513.M62
1,27 mm
0.050"






Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

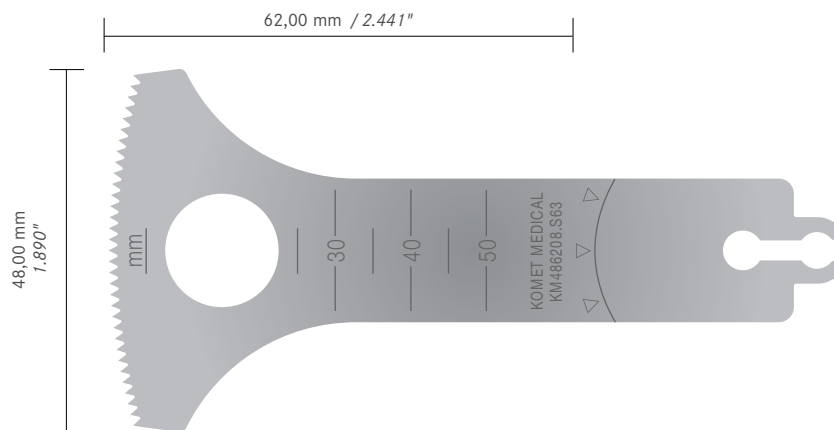

REF	KM486208.S63 STE				
Blattstärke	0,60 mm	Schnittstärke	0,80 mm		 STERILE
Material Thickness	0.024"	Cutting Thickness	0.031"		
REF	KM486208.S63				
Blattstärke	0,60 mm	Schnittstärke	0,80 mm		 NON STERILE
Material Thickness	0.024"	Cutting Thickness	0.031"		

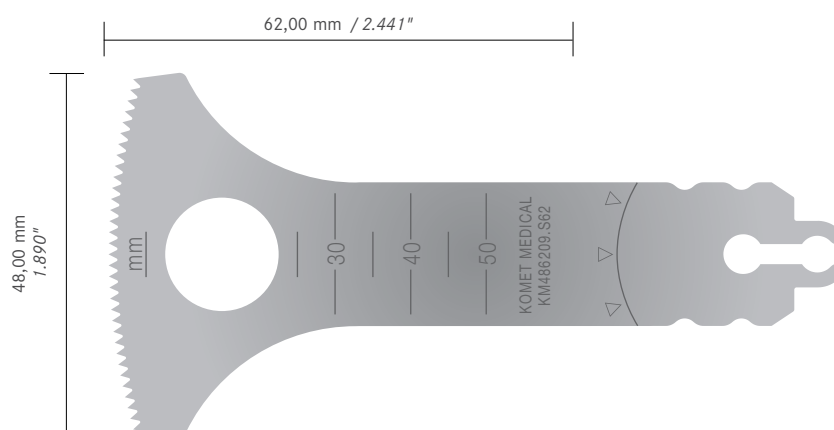


REF	KM486209.S62 STE				
Blattstärke	0,80 mm	Schnittstärke	1,00 mm		 STERILE
Material Thickness	0.031"	Cutting Thickness	0.039"		
REF	KM486209.S62				
Blattstärke	0,80 mm	Schnittstärke	1,00 mm		 NON STERILE
Material Thickness	0.031"	Cutting Thickness	0.039"		






Stryker

Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

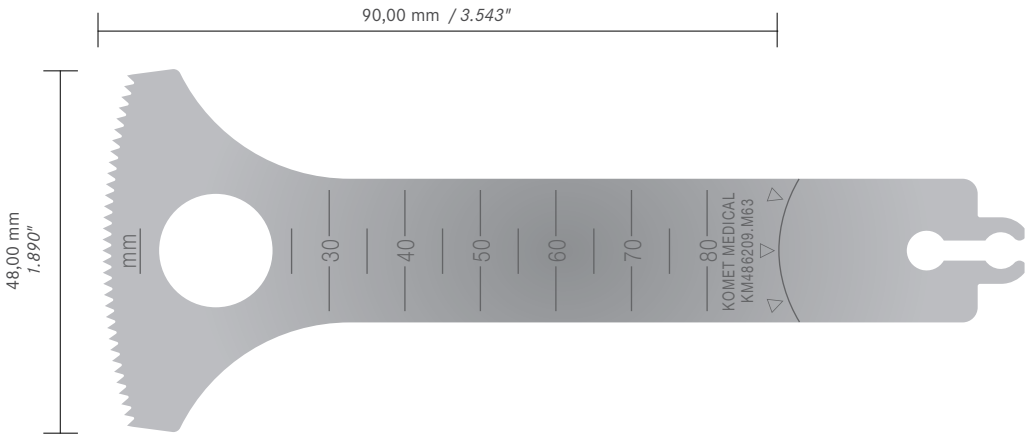

		REF	KM486209.M63 STE	Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"
		REF	KM486209.M63	Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"

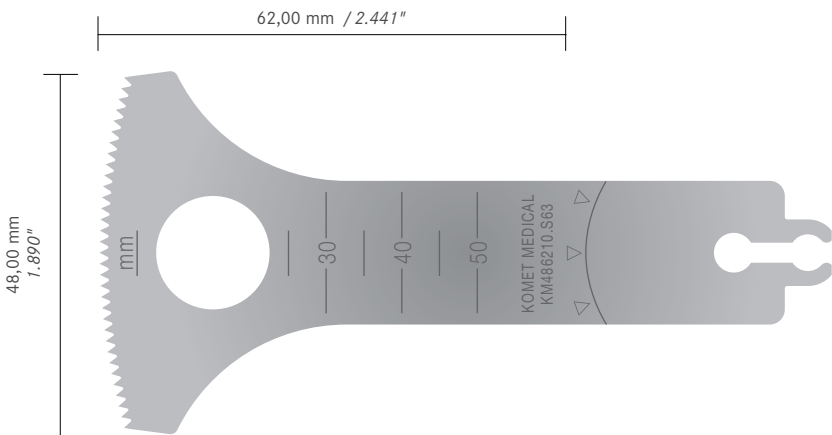


neu
new


		REF	KM486210.S63 STE	Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
		REF	KM486210.S63	Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"




Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

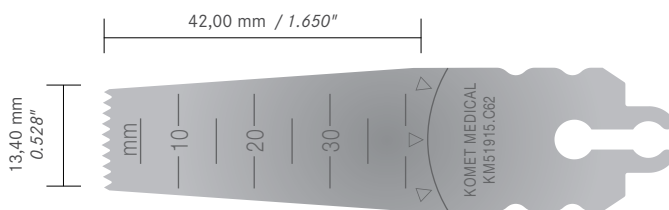


REF	KM51915.C62 STE				
Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"		
REF	KM51915.C62				
Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"		

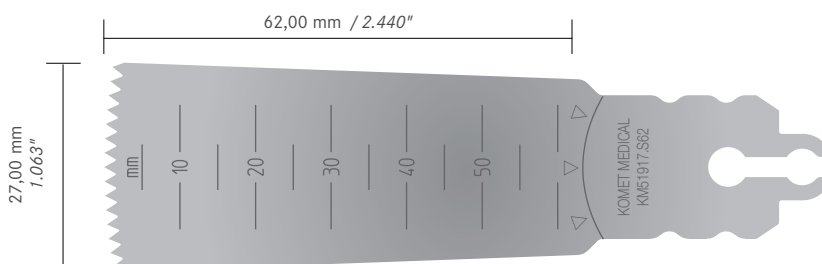

REF	KM51917.S62 STE				
Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"		
REF	KM51917.S62				
Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"		

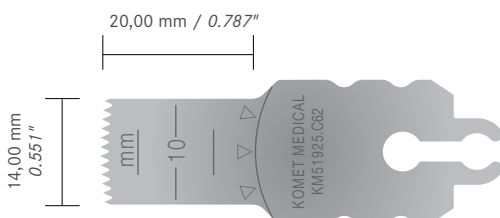

REF	KM51925.C62 STE				
Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"		
REF	KM51925.C62				
Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"		

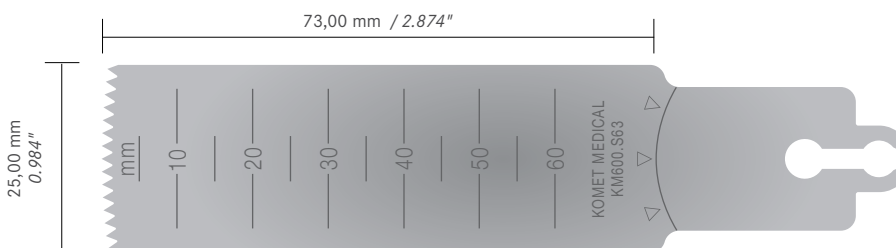


REF	KM600.S63 STE				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		
REF	KM600.S63				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		




Stryker


Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

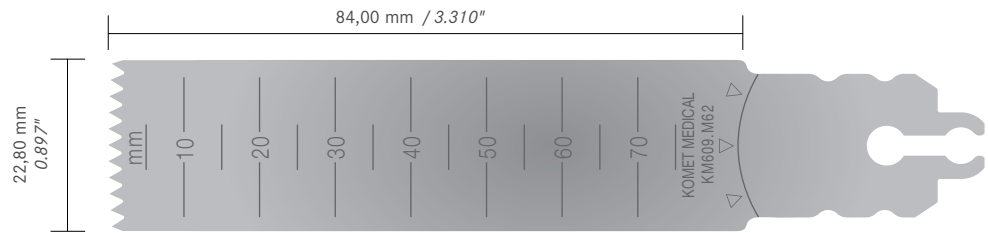


STERILE		REF	KM609.M62 STE	Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
		REF	KM609.M62	Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

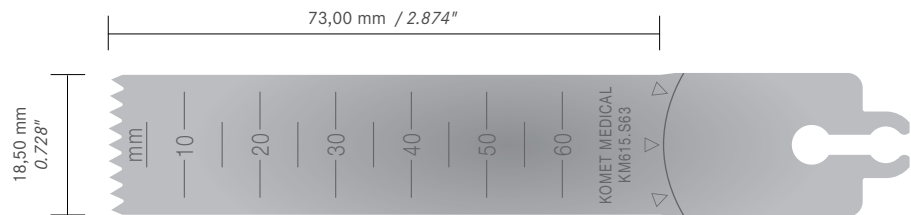

STERILE		REF	KM615.S63 STE	Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
		REF	KM615.S63	Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

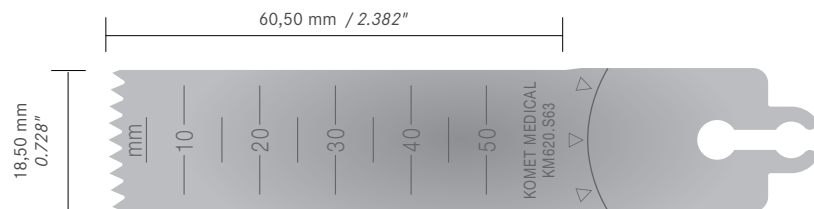


STERILE		REF	KM620.S63 STE	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"
		REF	KM620.S63	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"

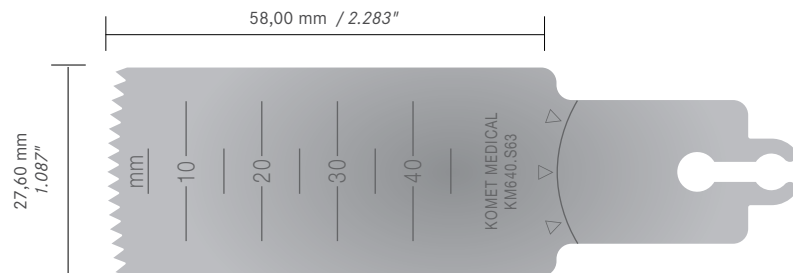


STERILE		REF	KM640.S63 STE	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"
		REF	KM640.S63	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"




Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

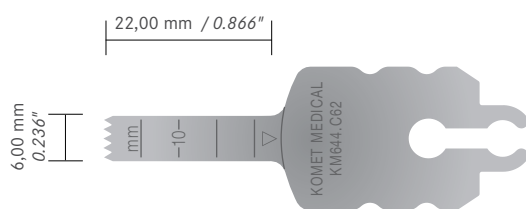


REF	KM644.C62 STE	Schnittstärke	1,00 mm	STERILE
Blattstärke	0,80 mm	Cutting Thickness	0.039"	
Material Thickness	0.031"			
REF	KM644.C62	Schnittstärke	1,00 mm	NON STERILE
Blattstärke	0,80 mm	Cutting Thickness	0.039"	
Material Thickness	0.031"			

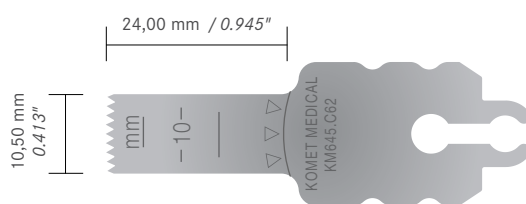

REF	KM645.C62 STE	Schnittstärke	1,00 mm	STERILE
Blattstärke	0,80 mm	Cutting Thickness	0.039"	
Material Thickness	0.031"			
REF	KM645.C62	Schnittstärke	1,00 mm	NON STERILE
Blattstärke	0,80 mm	Cutting Thickness	0.039"	
Material Thickness	0.031"			

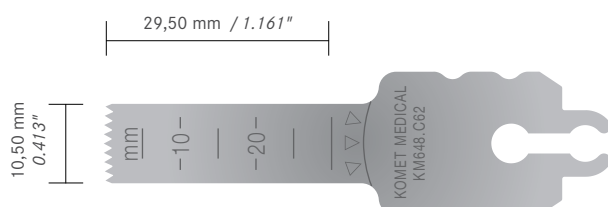

REF	KM648.C62 STE	Schnittstärke	1,00 mm	STERILE
Blattstärke	0,80 mm	Cutting Thickness	0.039"	
Material Thickness	0.031"			
REF	KM648.C62	Schnittstärke	1,00 mm	NON STERILE
Blattstärke	0,80 mm	Cutting Thickness	0.039"	
Material Thickness	0.031"			

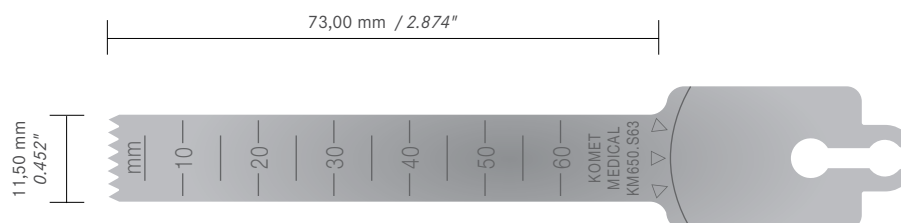


REF	KM650.S63 STE	Schnittstärke	0,80 mm	STERILE
Blattstärke	0,60 mm	Cutting Thickness	0.031"	
Material Thickness	0.024"			
REF	KM650.S63	Schnittstärke	0,80 mm	NON STERILE
Blattstärke	0,60 mm	Cutting Thickness	0.031"	
Material Thickness	0.024"			




Stryker


Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

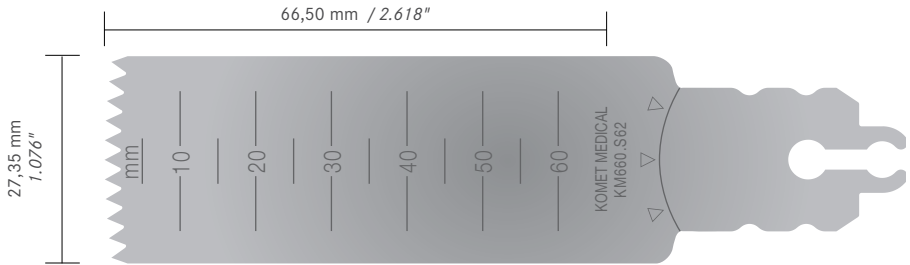

STERILE	REF	KM660.S62 STE		
	Blattstärke	0,80 mm	Schnittstärke	1,40 mm
	Material Thickness	0.031"	Cutting Thickness	0.055"
NON STERILE	REF	KM660.S62		
	Blattstärke	0,80 mm	Schnittstärke	1,40 mm
	Material Thickness	0.031"	Cutting Thickness	0.055"

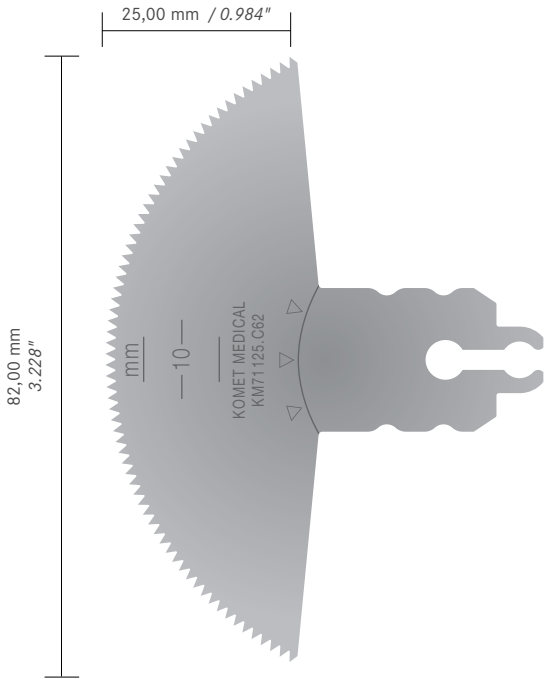


STERILE	REF	KM71125.C62 STE		
	Blattstärke	0,60 mm	Schnittstärke	1,00 mm
	Material Thickness	0.024"	Cutting Thickness	0.039"
NON STERILE	REF	KM71125.C62		
	Blattstärke	0,60 mm	Schnittstärke	1,00 mm
	Material Thickness	0.024"	Cutting Thickness	0.039"

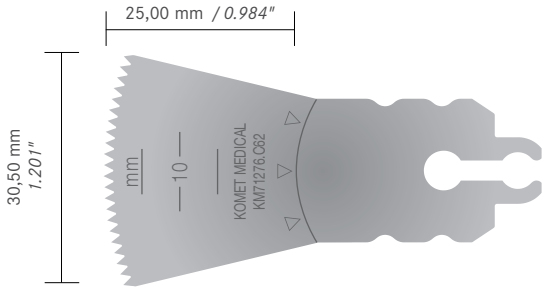


STERILE	REF	KM71276.C62 STE		
	Blattstärke	0,60 mm	Schnittstärke	1,00 mm
	Material Thickness	0.024"	Cutting Thickness	0.039"
NON STERILE	REF	KM71276.C62		
	Blattstärke	0,60 mm	Schnittstärke	1,00 mm
	Material Thickness	0.024"	Cutting Thickness	0.039"



Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

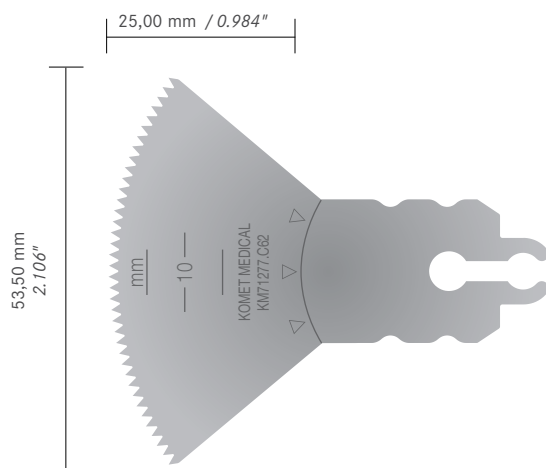

REF	KM71277.C62 STE				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"		
REF	KM71277.C62				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"		

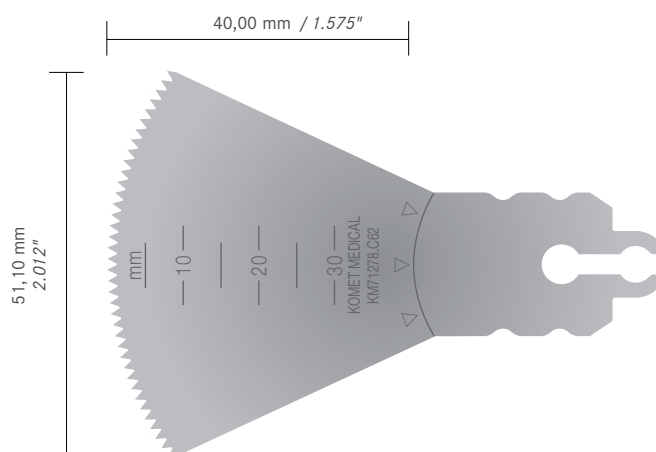


REF	KM71278.C62 STE				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"		
REF	KM71278.C62				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"		




Stryker

Kompatible Anschlüsse
compatible connections:
Stryker System EHD
(296-98), 2000 (2108),
S4 (4108), S5 (4208),
S6 (6208), S7 (7208),
S8 (8208)

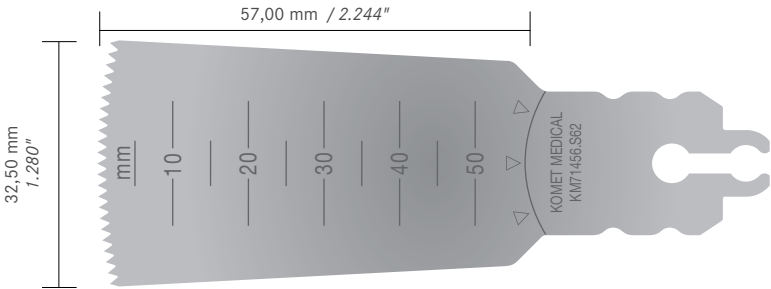


		REF	KM71456.S62 STE		
		Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
		REF	KM71456.S62		
		Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

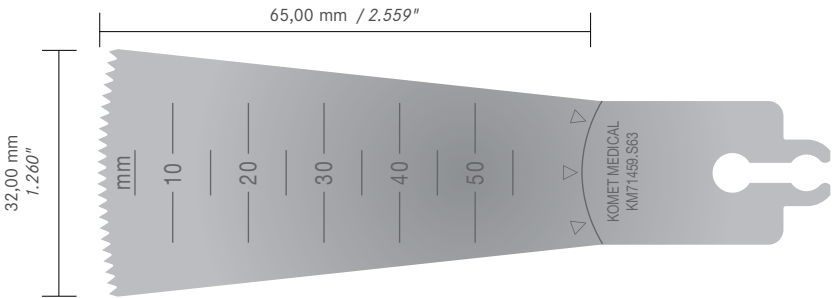


		REF	KM71459.S63 STE		
		Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
		REF	KM71459.S63		
		Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"






Kompatible Anschlüsse
compatible connections:
4107, 298-97, 297-87,
296-87, 2107, 296-97,
6207, 7207, 8207

REF	KM97 STE	Schnittstärke	1,05 mm		STERILE
Blattstärke	0,60 mm	Cutting Thickness	0.041"		
Material Thickness	0.024"				
REF	KM97	Schnittstärke	1,05 mm		NON STERILE
Blattstärke	0,60 mm	Cutting Thickness	0.041"		
Material Thickness	0.024"				

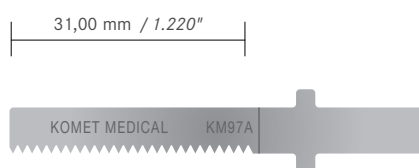


REF	KM97A STE	Schnittstärke	1,05 mm		STERILE
Blattstärke	0,80 mm	Cutting Thickness	0.041"		
Material Thickness	0.031"				
REF	KM97A	Schnittstärke	1,05 mm		NON STERILE
Blattstärke	0,80 mm	Cutting Thickness	0.041"		
Material Thickness	0.031"				



Kompatible Anschlüsse
compatible connections:
4206, 4106, 2106,
296-96, 6206, 7206,
8206,
reciprocating saw

REF	KM250R STE	Schnittstärke	1,10 mm		STERILE
Blattstärke	0,60 mm	Cutting Thickness	0.043"		
Material Thickness	0.024"				

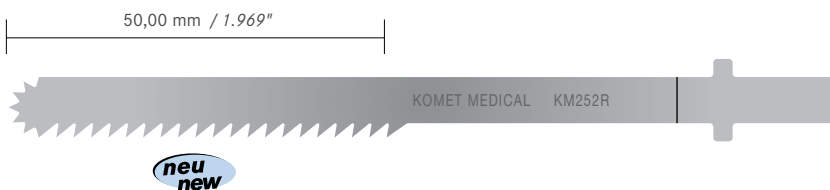


REF	KM252R STE	Schnittstärke	1,00 mm		STERILE
Blattstärke	1,00 mm	Cutting Thickness	0.039"		
Material Thickness	0.039"				




Stryker

Kompatible Anschlüsse
compatible connections:
4206, 4106, 2106,
296-96, 6206, 7206,
8206,
reciprocating saw

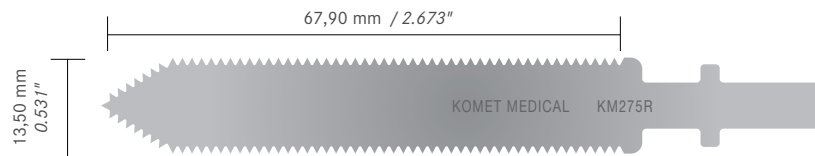


STERILE ②	5	REF	KM275R STE		
		Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

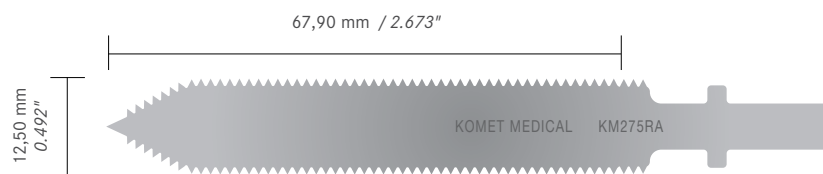


neu
new

STERILE ②	5	REF	KM275RA STE		
		Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

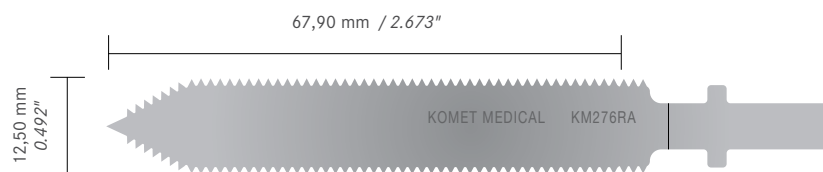

neu
new

STERILE ②	5	REF	KM276RA STE		
		Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

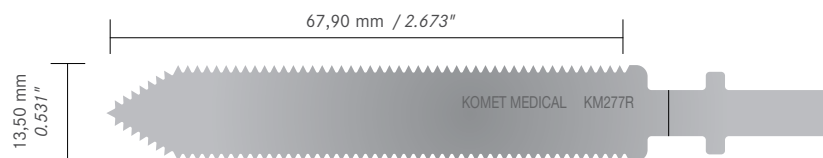


STERILE ②	5	REF	KM277R STE		
		Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"






Kompatible Anschlüsse
compatible connections:
4206, 4106, 2106,
296-96, 6206, 7206,
8206,
reciprocating saw

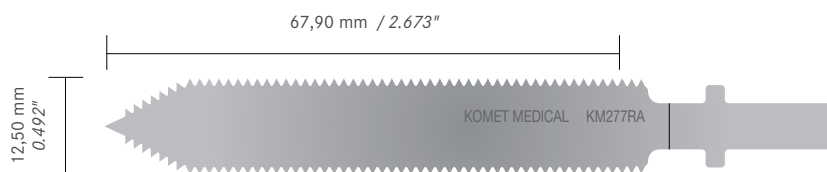


neu
new


REF	KM277RA STE				
Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"		

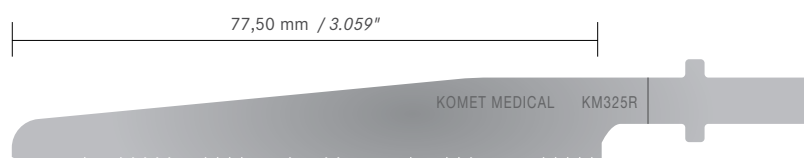

REF	KM325R STE				
Blattstärke Material Thickness	0,80 mm 0.031"	Schnittstärke Cutting Thickness	1,05 mm 0.041"		

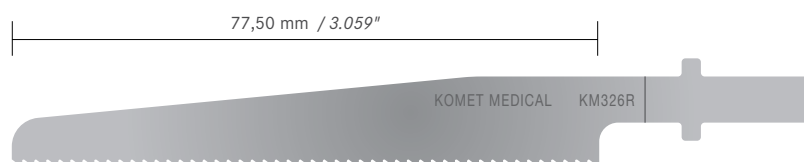

REF	KM326R STE				
Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"		

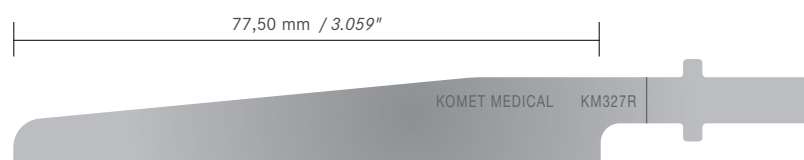

neu
new

REF	KM327R STE				
Blattstärke Material Thickness	1,20 mm 0.047"	Schnittstärke Cutting Thickness	1,40 mm 0.055"		





Stryker

Kompatible Anschlüsse
compatible connections:

TPS5100-34 sagittal saw,
TPS5100-31 oscillating saw



Command2 2296-31,
2296-234, 2296-34,
2296-231, 2296-080-134

Cordless Driver 2+3+4
Att. 4100-400

Sabo Sagittal Saw 4300-
034, Sabo 2 4408-000,
Micro Bone Saw

Core 5400-34, 5400-31
NSK Primado

RemB Micro Power
6400-034, 6400-031,
4100-400



REF

KM3.102 STE

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"

REF

KM3.103 STE

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"



REF

KM3.102

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"

REF


KM3.103

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"



REF

KM3.104 STE

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"

REF

KM3.105 STE

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"



REF

KM3.104

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"

REF



KM3.105

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"

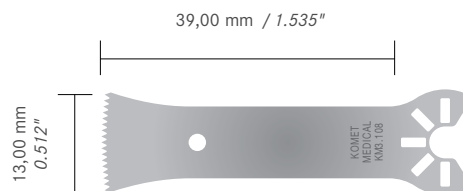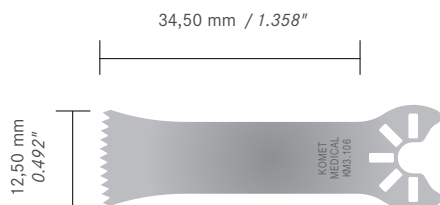

REF

KM3.106 STE

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,50 mm
0.020"

REF

KM3.108 STE

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"



REF

KM3.106

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,50 mm
0.020"

REF



KM3.108

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"

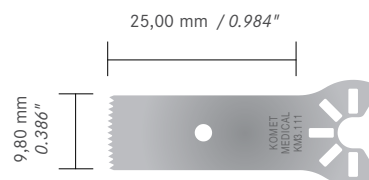

REF

KM3.110 STE

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"

REF

KM3.111 STE

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"



REF

KM3.110

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"

REF

KM3.111

Blattstärke
Material Thickness

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,60 mm
0.024"



Kompatible Anschlüsse
compatible connections:

TPS5100-34 sagittal saw,
TPS5100-31 oscillating saw



Command2 2296-31,
2296-234, 2296-34,
2296-231, 2296-080-134

Cordless Driver 2+3+4
Att. 4100-400

Sabo Sagittal Saw 4300-
034, Sabo 2 4408-000,
Micro Bone Saw

Core 5400-34, 5400-31
NSK Primado

RemB Micro Power
6400-034, 6400-031,
4100-400

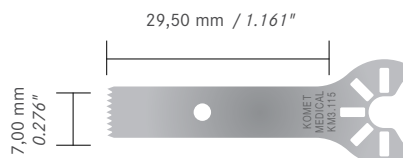



REF	KM3.114 STE								
Blattstärke	0,40 mm	Schnittstärke	0,60 mm						
Material Thickness	0.016"	Cutting Thickness	0.024"						
REF	KM3.114								
Blattstärke	0,40 mm	Schnittstärke	0,60 mm						
Material Thickness	0.016"	Cutting Thickness	0.024"						
REF	KM3.115								
Blattstärke	0,40 mm	Schnittstärke	0,60 mm						
Material Thickness	0.016"	Cutting Thickness	0.024"						



STERILE



NON
STERILE

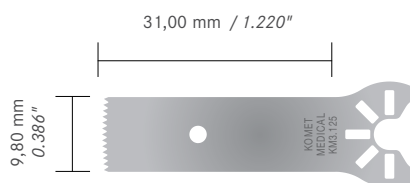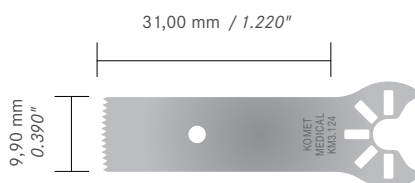

neu
new



REF	KM3.124 STE								
Blattstärke	0,40 mm	Schnittstärke	0,50 mm						
Material Thickness	0.016"	Cutting Thickness	0.020"						
REF	KM3.124								
Blattstärke	0,40 mm	Schnittstärke	0,50 mm						
Material Thickness	0.016"	Cutting Thickness	0.020"						
REF	KM3.125								
Blattstärke	0,40 mm	Schnittstärke	0,60 mm						
Material Thickness	0.016"	Cutting Thickness	0.024"						



STERILE



NON
STERILE




REF	KM3.212 STE								
Blattstärke	0,40 mm	Schnittstärke	0,60 mm						
Material Thickness	0.016"	Cutting Thickness	0.024"						
REF	KM3.212								
Blattstärke	0,40 mm	Schnittstärke	0,60 mm						
Material Thickness	0.016"	Cutting Thickness	0.024"						
REF	KM3.215								
Blattstärke	0,40 mm	Schnittstärke	0,50 mm						
Material Thickness	0.016"	Cutting Thickness	0.020"						



STERILE



NON
STERILE

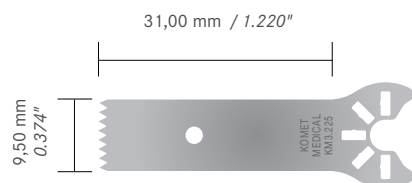

REF	KM3.225 STE								
Blattstärke	0,40 mm	Schnittstärke	0,60 mm						
Material Thickness	0.016"	Cutting Thickness	0.024"						
REF	KM3.225								
Blattstärke	0,40 mm	Schnittstärke	0,60 mm						
Material Thickness	0.016"	Cutting Thickness	0.024"						
REF	KM3.254								
Blattstärke	0,40 mm	Schnittstärke	0,60 mm						
Material Thickness	0.016"	Cutting Thickness	0.024"						



STERILE



NON
STERILE



Stryker

Kompatible Anschlüsse
compatible connections:

TPS5100-34 sagittal saw,
TPS5100-31 oscillating saw



Command2 2296-31,
2296-234, 2296-34,
2296-231, 2296-080-134

Cordless Driver 2+3+4
Att. 4100-400



Sabo Sagittal Saw 4300-
034, Sabo 2 4408-000,
Micro Bone Saw

Core 5400-34, 5400-31
NSK Primado



RemB Micro Power
6400-034, 6400-031,
4100-400





STERILE	REF	KM3.410 STE	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"
NON STERILE	REF	KM3.410	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"
STERILE	REF	KM3.411 STE	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"
NON STERILE	REF	KM3.411	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"



STERILE	REF	KM3.412 STE	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"
NON STERILE	REF	KM3.412	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"
STERILE	REF	KM3.413 STE	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,50 mm 0.020"
NON STERILE	REF	KM3.413	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,50 mm 0.020"

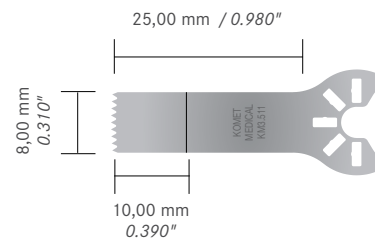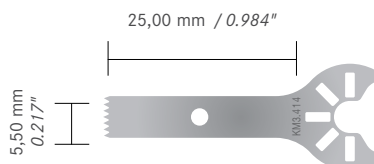

STERILE	REF	KM3.414 STE	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"
NON STERILE	REF	KM3.414	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"
STERILE	REF	KM3.511 STE	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"
NON STERILE	REF	KM3.511	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"

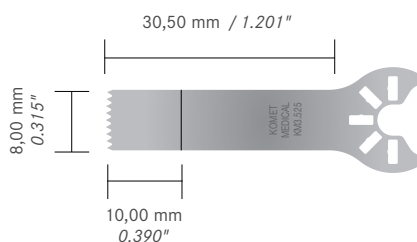

STERILE	REF	KM3.525 STE	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"
NON STERILE	REF	KM3.525	Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"
STERILE	REF	KM33.103 STE	Blattstärke <i>Material Thickness</i>	0,50 mm 0.020"	Schnittstärke <i>Cutting Thickness</i>	0,70 mm 0.028"
NON STERILE	REF	KM33.103	Blattstärke <i>Material Thickness</i>	0,50 mm 0.020"	Schnittstärke <i>Cutting Thickness</i>	0,70 mm 0.028"



Kompatible Anschlüsse
compatible connections:

TPS5100-34 sagittal saw,
TPS5100-31 oscillating saw



Command2 2296-31,
2296-234, 2296-34,
2296-231, 2296-080-134

Cordless Driver 2+3+4
Att. 4100-400

Sabo Sagittal Saw 4300-
034, Sabo 2 4408-000,
Micro Bone Saw

Core 5400-34, 5400-31
NSK Primado

RemB Micro Power
6400-034, 6400-031,
4100-400

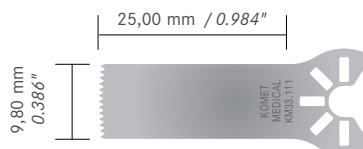

REF	KM33.105 STE		
Blattstärke	0,50 mm	Schnittstärke	0,70 mm
Material Thickness	0.020"	Cutting Thickness	0.028"



REF	KM33.111 STE		
Blattstärke	0,50 mm	Schnittstärke	0,70 mm
Material Thickness	0.020"	Cutting Thickness	0.028"



STERILE



NON
STERILE

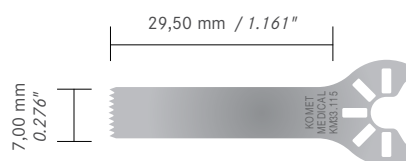

REF	KM33.114 STE		
Blattstärke	0,50 mm	Schnittstärke	0,60 mm
Material Thickness	0.020"	Cutting Thickness	0.024"


REF	KM33.115 STE		
Blattstärke	0,50 mm	Schnittstärke	0,70 mm
Material Thickness	0.020"	Cutting Thickness	0.028"



STERILE



NON
STERILE

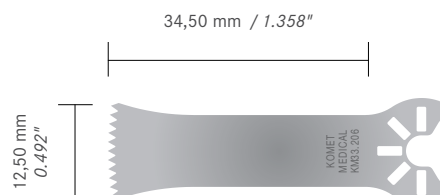

REF	KM33.125 STE		
Blattstärke	0,50 mm	Schnittstärke	0,60 mm
Material Thickness	0.020"	Cutting Thickness	0.024"



REF	KM33.206 STE		
Blattstärke	0,50 mm	Schnittstärke	0,70 mm
Material Thickness	0.020"	Cutting Thickness	0.028"



STERILE



NON
STERILE

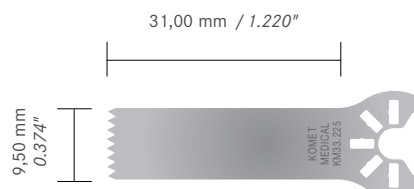

REF	KM33.212 STE		
Blattstärke	0,50 mm	Schnittstärke	0,70 mm
Material Thickness	0.020"	Cutting Thickness	0.028"

REF	KM33.225 STE		
Blattstärke	0,50 mm	Schnittstärke	0,70 mm
Material Thickness	0.020"	Cutting Thickness	0.028"



STERILE



NON
STERILE

Alle Abbildungen in aktueller Größe (1:1)
All saw blades shown in actual size



Stryker

Kompatible Anschlüsse
compatible connections:

TPS5100-34 sagittal saw,
TPS5100-31 oscillating saw



Command2 2296-31,
2296-234, 2296-34,
2296-231, 2296-080-134

Cordless Driver 2+3+4
Att. 4100-400



Sabo Sagittal Saw 4300-
034, Sabo 2 4408-000,
Micro Bone Saw

Core 5400-34, 5400-31
NSK Primado

RemB Micro Power
6400-034, 6400-031,
4100-400



		REF	KM33.410 STE	Blattstärke Material Thickness	0,50 mm 0.020"	Schnittstärke Cutting Thickness	0,70 mm 0.028"
		REF	KM33.410	Blattstärke Material Thickness	0,50 mm 0.020"	Schnittstärke Cutting Thickness	0,70 mm 0.028"

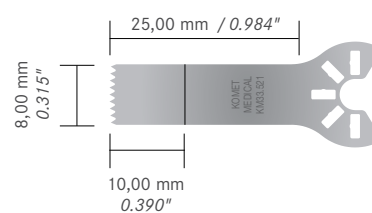

		REF	KM33.414 STE	Blattstärke Material Thickness	0,50 mm 0.020"	Schnittstärke Cutting Thickness	0,70 mm 0.028"
		REF	KM33.414	Blattstärke Material Thickness	0,50 mm 0.020"	Schnittstärke Cutting Thickness	0,70 mm 0.028"

REF	KM33.521 STE	Blattstärke Material Thickness	0,50 mm 0.020"	Schnittstärke Cutting Thickness	0,70 mm 0.028"
REF	KM33.521	Blattstärke Material Thickness	0,50 mm 0.020"	Schnittstärke Cutting Thickness	0,70 mm 0.028"



Kompatible Anschlüsse <i>compatible connections:</i>	TPS 5100-37 Command 2 2296-37 / 237	Core 5400-37 reciprocating saw	RemB Micro Power 6400.037
---	--	-----------------------------------	------------------------------




REF	KM5140.010 STE				
Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,40 mm 0.016"		STERILE
REF	KM5140.010				
Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,40 mm 0.016"		NON STERILE



REF	KM5140.011 STE				
Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"		STERILE
REF	KM5140.011				
Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"		NON STERILE



REF	KM5140.012 STE				
Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"		STERILE
REF	KM5140.012				
Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"		NON STERILE

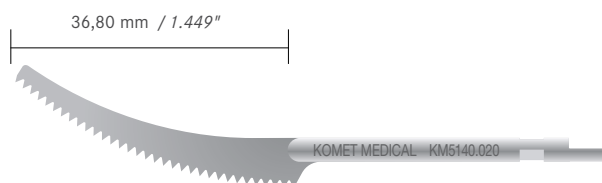

REF	KM5140.020 STE				
Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,55 mm 0.022"		STERILE
REF	KM5140.020				
Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,55 mm 0.022"		NON STERILE



Stryker

Kompatible Anschlüsse
compatible connections:

TPS 5100-37
Command 2 2296-37 / 237

Core 5400-37
reciprocating saw

RemB Micro Power
6400.037

24,90 mm / 0.980"



REF

Blattstärke

Material Thickness

KM5140.106 STE

0,40 mm

0.016"

Schnittstärke

Cutting Thickness

0,40 mm

0.016"



REF

Blattstärke

Material Thickness

KM5140.106

0,40 mm

0.016"

Schnittstärke

Cutting Thickness

0,40 mm

0.016"

23,00 mm / 0.905"



REF

Blattstärke

Material Thickness

KM5140.107 STE

0,40 mm

0.016"

Schnittstärke

Cutting Thickness

0,40 mm

0.016"



REF

Blattstärke

Material Thickness

KM5140.107

0,40 mm

0.016"

Schnittstärke

Cutting Thickness

0,40 mm

0.016"

28,00 mm / 1.102"



REF

Blattstärke

Material Thickness

KM5140.123 STE

0,40 mm

0.016"

Schnittstärke

Cutting Thickness

0,60 mm

0.024"



REF

Blattstärke

Material Thickness

KM5140.123

0,40 mm

0.016"

Schnittstärke

Cutting Thickness

0,60 mm

0.024"

23,00 mm / 0.906"



REF

Blattstärke

Material Thickness

KM5140.133 STE

0,40 mm

0.016"

Schnittstärke

Cutting Thickness

0,60 mm

0.024"



REF

Blattstärke

Material Thickness

KM5140.133

0,40 mm

0.016"

Schnittstärke


Cutting Thickness

0,60 mm

0.024"



Kompatible Anschlüsse <i>compatible connections:</i>	TPS 5100-37 Command 2 2296-37/237	Core 5400-37 reciprocating saw	RemB Micro Power 6400.037
---	--------------------------------------	-----------------------------------	------------------------------



REF	KM5140.190 STE				
Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,40 mm 0.016"		STERILE
REF	KM5140.190				
Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,40 mm 0.016"		NON STERILE



REF	KM5140.233 STE				
Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"		STERILE
REF	KM5140.233				
Blattstärke <i>Material Thickness</i>	0,40 mm 0.016"	Schnittstärke <i>Cutting Thickness</i>	0,60 mm 0.024"		NON STERILE



REF	KM5140.615 STE				
Blattstärke <i>Material Thickness</i>	0,30 mm 0.012"	Schnittstärke <i>Cutting Thickness</i>	0,35 mm 0.014"		STERILE
REF	KM5140.615				
Blattstärke <i>Material Thickness</i>	0,30 mm 0.012"	Schnittstärke <i>Cutting Thickness</i>	0,35 mm 0.014"		NON STERILE



REF	KM5160.011 STE				
Blattstärke <i>Material Thickness</i>	0,60 mm 0.024"	Schnittstärke <i>Cutting Thickness</i>	1,00 mm 0.039"		STERILE
REF	KM5160.011				
Blattstärke <i>Material Thickness</i>	0,60 mm 0.024"	Schnittstärke <i>Cutting Thickness</i>	1,00 mm 0.039"		NON STERILE




Stryker

Kompatible Anschlüsse
compatible connections:


TPS 5100-37
Command 2 2296-37 / 237

Core 5400-37
reciprocating saw


RemB Micro Power
6400.037

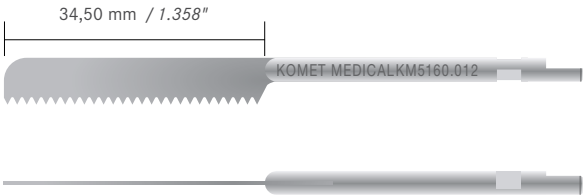

		REF	KM5160.012 STE	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
		REF	KM5160.012	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

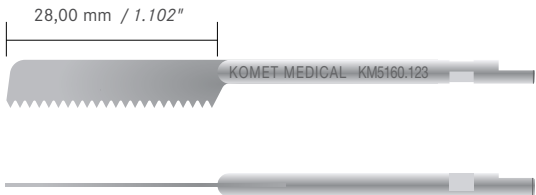

		REF	KM5160.123 STE	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
		REF	KM5160.123	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

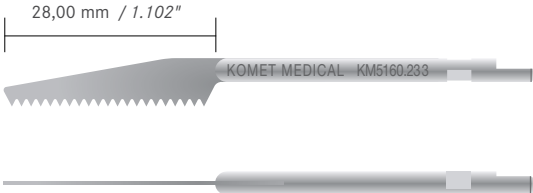

		REF	KM5160.233 STE	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"
		REF	KM5160.233	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"



Kompatible Anschlüsse <i>compatible connections:</i>	TPS 5100-37 Command 2 2296-37 / 237	Core 5400-37 reciprocating saw	RemB Micro Power 6400.037
---	--	-----------------------------------	------------------------------

11,00 mm / 0.433"


5,50 mm
0.217"


Raspel Cross Cut / Cross cut rasp

REF	KM37113.ST STE	Kopfdurchmesser	5,50 mm	STERILE
Arbeitslänge Length	11,00 mm 0.433"	Head diameter	0.217"	
REF	KM37113.ST	Kopfdurchmesser	5,50 mm	NON STERILE
Arbeitslänge Length	11,00 mm 0.433"	Head diameter	0.217"	

13,00 mm / 0.512"


7,00 mm
0.276"


Raspel Cross Cut / Cross cut rasp

REF	KM37114.ST STE	Kopfdurchmesser	7,00 mm	STERILE
Arbeitslänge Length	13,00 mm 0.512"	Head diameter	0.276"	
REF	KM37114.ST	Kopfdurchmesser	7,00 mm	NON STERILE
Arbeitslänge Length	13,00 mm 0.512"	Head diameter	0.276"	

11,00 mm / 0.433"


5,50 mm
0.217"


Raspel Plain Cut / Plain cut rasp

REF	KM37115.ST STE	Kopfdurchmesser	5,50 mm	STERILE
Arbeitslänge Length	11,00 mm 0.433"	Head diameter	0.217"	
REF	KM37115.ST	Kopfdurchmesser	5,50 mm	NON STERILE
Arbeitslänge Length	11,00 mm 0.433"	Head diameter	0.217"	

13,00 mm / 0.512"


7,00 mm
0.276"


Raspel Plain Cut / Plain cut rasp

REF	KM37116.ST STE	Kopfdurchmesser	7,00 mm	STERILE
Arbeitslänge Length	13,00 mm 0.512"	Head diameter	0.276"	
REF	KM37116.ST	Kopfdurchmesser	7,00 mm	NON STERILE
Arbeitslänge Length	13,00 mm 0.512"	Head diameter	0.276"	






EZblade®


steril verpackte Sägeblätter für den Mehrfachgebrauch
sterile packed saw blades for multiple use

DePuy Synthes


Kompatible Anschlüsse
compatible connections:
Compact Air Drive II +
Power Drive 511.800,
511.801,
Air Power Line 511.610,
Battery Power Line 530.610,
TRS 05.001.224,
05.001.223, 05.001.240,
Battery Power Line II
530.710

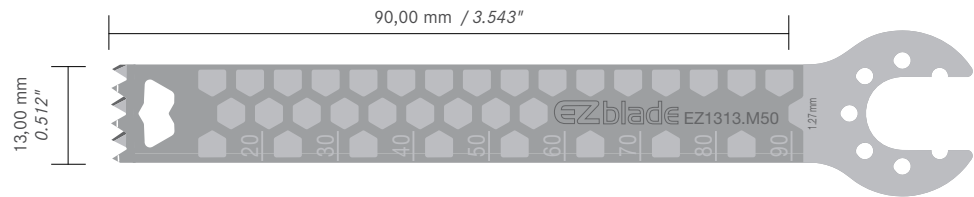

REF	EZ1310.M50 STE	EZ1312.M50 STE	EZ1313.M50 STE	EZ1314.M50 STE		
Schnittstärke	1,00 mm	1,19 mm	1,27 mm	1,37 mm		
Cutting Thickness	0.039"	0.047"	0.050"	0.054"		

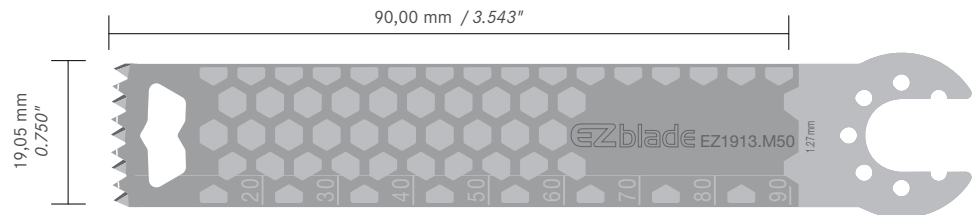


REF	EZ1912.M50 STE	EZ1913.M50 STE	EZ1914.M50 STE			
Schnittstärke	1,19 mm	1,27 mm	1,37 mm			
Cutting Thickness	0.047"	0.050"	0.054"			

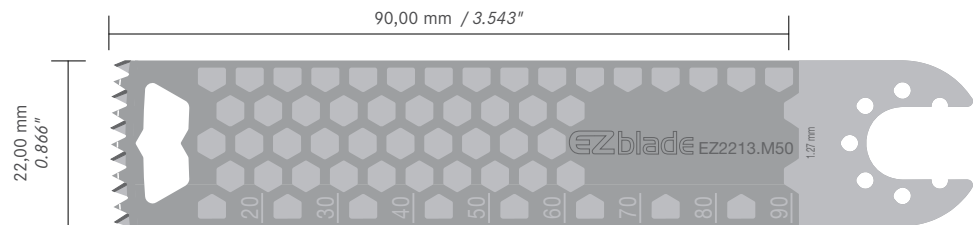

REF	EZ2210.M50 STE	EZ2212.M50 STE	EZ2213.M50 STE	EZ2214.M50 STE	EZ2215.M50 STE	
Schnittstärke	1,00 mm	1,19 mm	1,27 mm	1,37 mm	1,47 mm	
Cutting Thickness	0.039"	0.047"	0.050"	0.054"	0.058"	



Kompatible Anschlüsse
compatible connections:
Compact Air Drive II +
Power Drive 511.800,
511.801,
Air Power Line 511.610,
Battery Power Line 530.610,
TRS 05.001.224,
05.001.223, 05.001.240,
Battery Power Line II
530.710

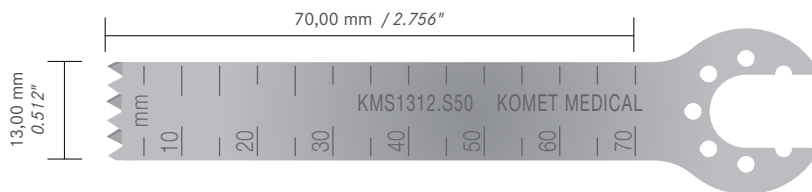

REF


KMS1312.S50 STE

Schnittstärke
Cutting Thickness

1,19 mm
0.047"



STERILE
②

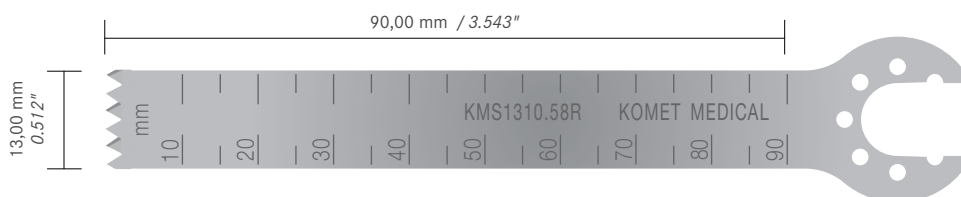

REF

KMS1310.58R STE

Schnittstärke
Cutting Thickness

1,00 mm
0.039"

KMS1312.59J STE

1,19 mm
0.047"

KMS1313.57S STE

1,27 mm
0.050"



STERILE
②



REF

KMS1713.L50 STE

Schnittstärke
Cutting Thickness


1,27 mm
0.050"

KMS1714.L50 STE

1,37 mm
0.054"



STERILE
②

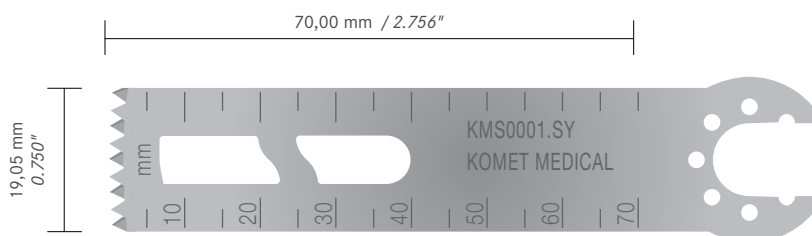

REF

KMS0001.SY STE

Schnittstärke
Cutting Thickness

1,00 mm
0.039"




STERILE
②



KMS ② 101

steril verpackte Sägeblätter für den Einmalgebrauch
sterile packed saw blades for single use

Kompatible Anschlüsse
compatible connections:
Compact Air Drive II +
Power Drive 511.800,
511.801,
Air Power Line 511.610,
Battery Power Line 530.610,
TRS 05.001.224,
05.001.223, 05.001.240,
Battery Power Line II
530.710

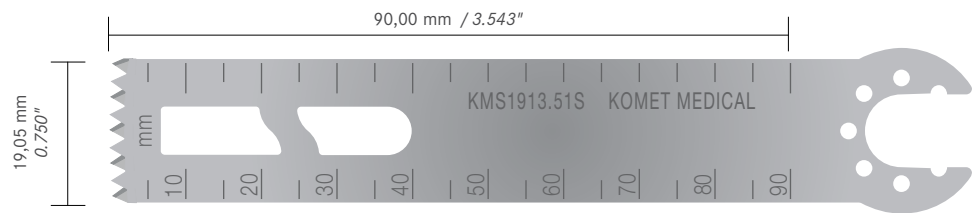

REF

Schnittstärke
Cutting Thickness

KMS1909.52R STE


0,89 mm
0.035"

KMS1913.51S STE

1,27 mm
0.050"

KMS1914.51T STE

1,37 mm
0.054"

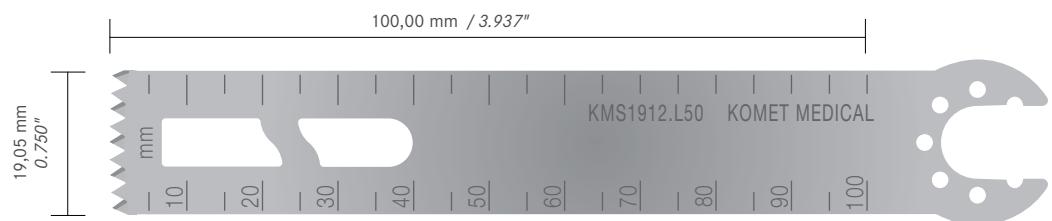

REF


Schnittstärke
Cutting Thickness

KMS1912.L50 STE

1,19 mm
0.047"

KMS1913.L50 STE

1,27 mm
0.050"

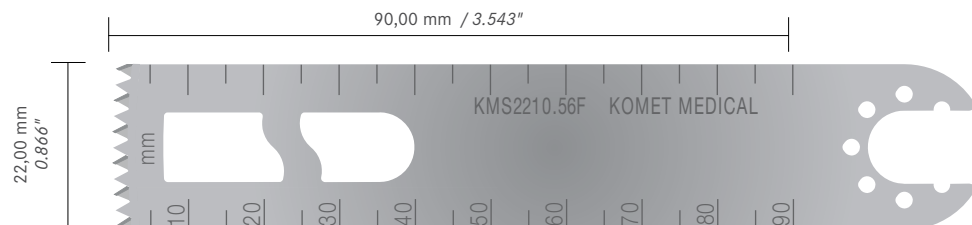

REF


Schnittstärke
Cutting Thickness

KMS2210.56F STE

1,00 mm
0.039"

KMS2213.57F STE

1,27 mm
0.050"

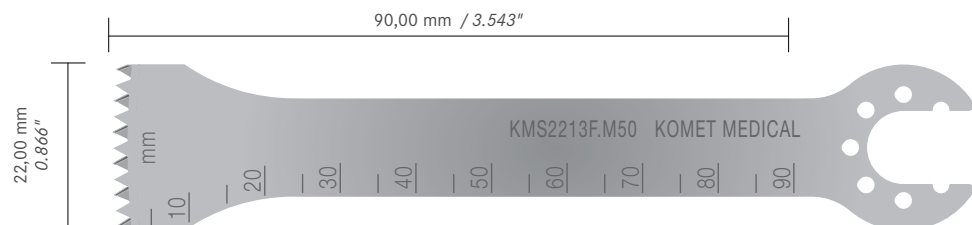

REF

Schnittstärke
Cutting Thickness


KMS2212F.M50 STE

1,19 mm
0.047"

KMS2213F.M50 STE

1,27 mm
0.050"




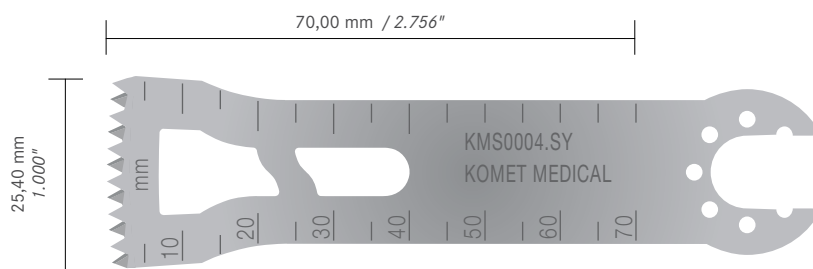

Kompatible Anschlüsse
compatible connections:
Compact Air Drive II +
Power Drive 511.800,
511.801,
Air Power Line 511.610,
Battery Power Line 530.610,
TRS 05.001.224,
05.001.223, 05.001.240,
Battery Power Line II
530.710

REF
Schnittstärke
Cutting Thickness

KMS0004.SY STE
1,00 mm
0.039"

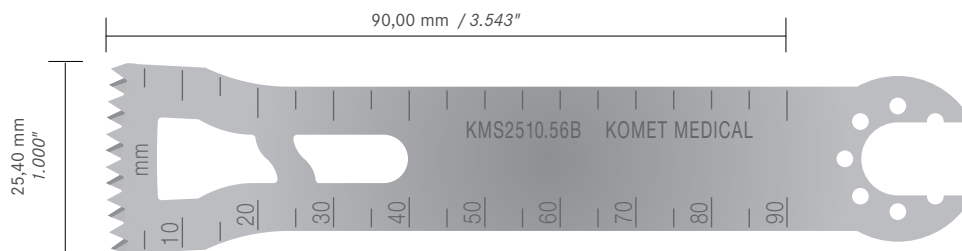

REF
Schnittstärke
Cutting Thickness


KMS2509.55R STE
0,89 mm
0.035"

KMS2510.56B STE
1,00 mm
0.039"

KMS2512.55J STE
1,19 mm
0.047"


KMS2513.55S STE
1,27 mm
0.050"

KMS2514.55T STE
1,37 mm
0.054"

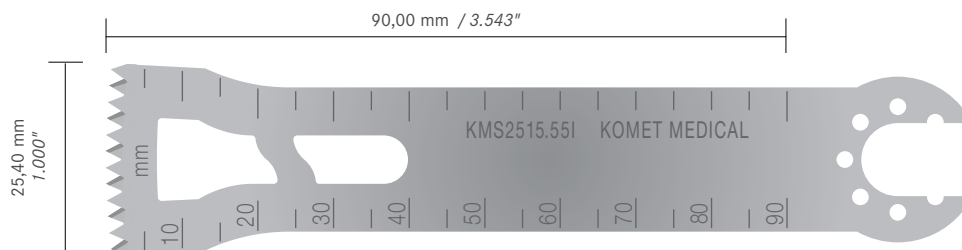

REF
Schnittstärke
Cutting Thickness

KMS2515.55I STE
1,47 mm
0.058"

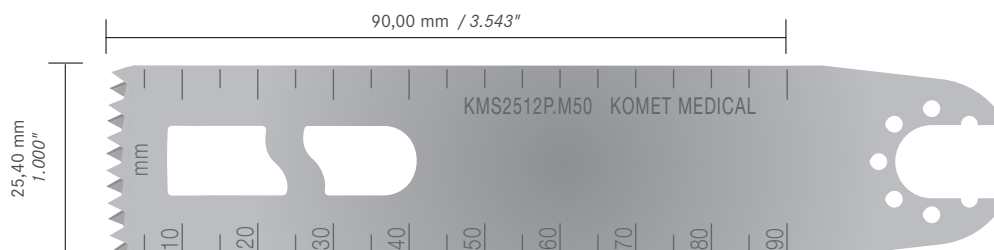

REF
Schnittstärke
Cutting Thickness

KMS2512P.M50 STE
1,19 mm
0.047"






EVOLUTION

unsteril verpackte Sägeblätter für den Mehrfachgebrauch
nonsterile packed saw blades for multiple use

Kompatible Anschlüsse
compatible connections:
Compact Air Drive II +
Power Drive 511.800,
511.801,
Air Power Line 511.610,
Battery Power Line 530.610,
TRS 05.001.224,
05.001.223, 05.001.240,
Battery Power Line II
530.710

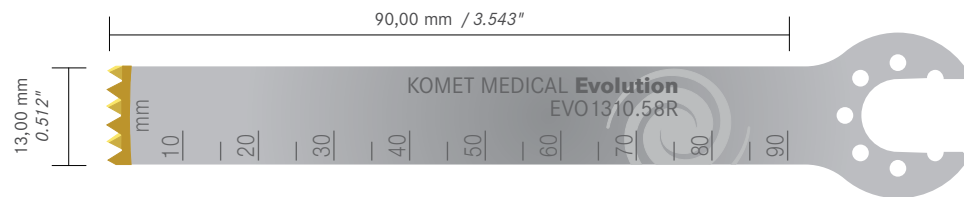

REF

Schnittstärke

Cutting Thickness

EVO1310.58R

1,00 mm

0.039"

EVO1312.59J


1,19 mm

0.047"

EVO1313.57S

1,27 mm

0.050"

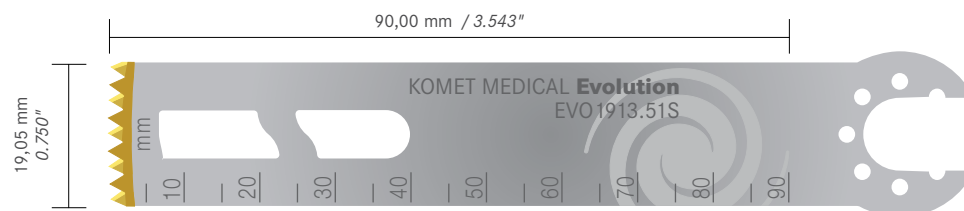

REF

Schnittstärke

Cutting Thickness

EVO1909.52R

0,89 mm

0.035"

EVO1913.51S


1,27 mm

0.050"

EVO1914.51T

1,37 mm

0.054"

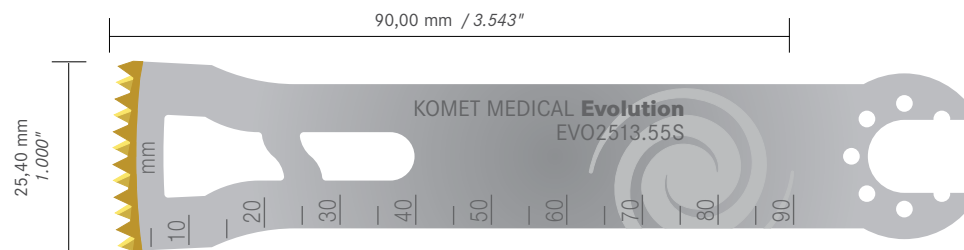

REF

Schnittstärke

Cutting Thickness

EVO2510.56B

1,00 mm

0.039"


EVO2513.55S

1,27 mm


0.050"




Kompatible Anschlüsse
compatible connections:
Compact Air Drive II +
Power Drive 511.800,
511.801,
Air Power Line 511.610,
Battery Power Line 530.610,
TRS 05.001.224,
05.001.223, 05.001.240,
Battery Power Line II
530.710

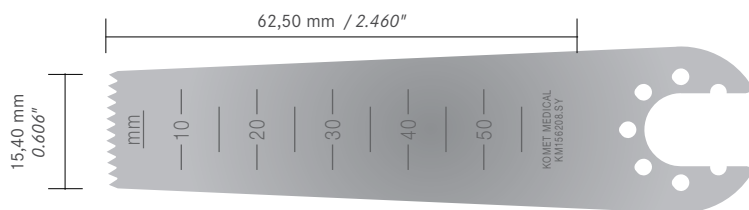


REF	KM156208.SY STE				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		STERILE
REF	KM156208.SY				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		NON STERILE

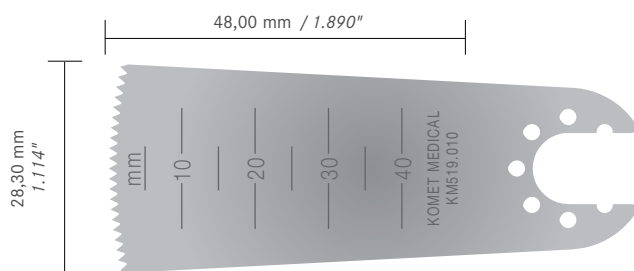

REF	KM519.010 STE				
Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		STERILE
REF	KM519.010				
Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		NON STERILE

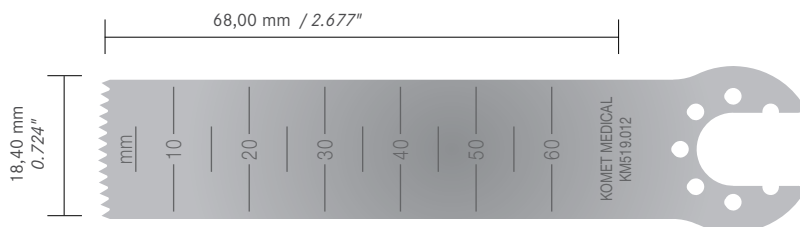


REF	KM519.012 STE				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		STERILE
REF	KM519.012				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		NON STERILE

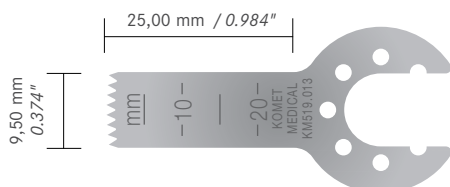


REF	KM519.013 STE				
Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		STERILE
REF	KM519.013				
Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		NON STERILE




Kompatible Anschlüsse
compatible connections:
Compact Air Drive II +
Power Drive 511.800,
511.801,
Air Power Line 511.610,
Battery Power Line 530.610,
TRS 05.001.224,
05.001.223, 05.001.240,
Battery Power Line II
530.710

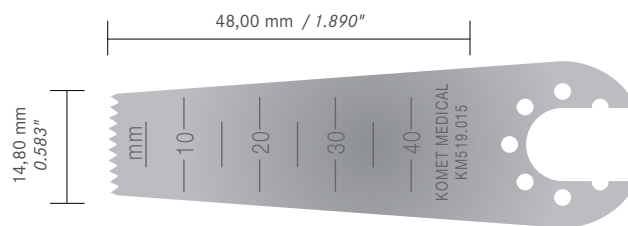


STERILE		REF	KM519.015 STE	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"
		REF	KM519.015	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"

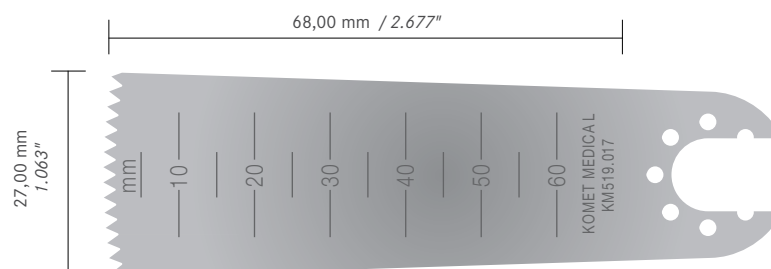

STERILE		REF	KM519.017 STE	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"
		REF	KM519.017	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"

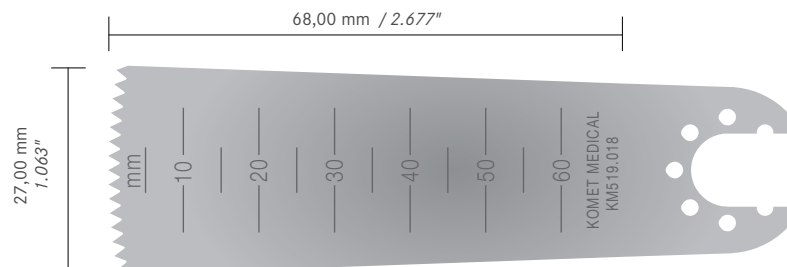


STERILE		REF	KM519.018 STE	Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"
		REF	KM519.018	Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"

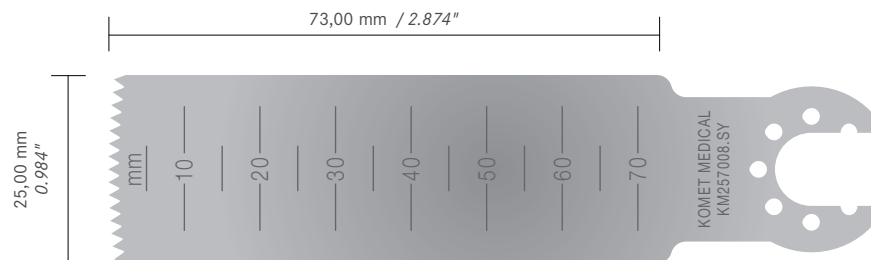



STERILE		REF	KM257008.SY STE	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"
		REF	KM257008.SY	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"




Kompatible Anschlüsse
compatible connections:
Compact Air Drive II +
Power Drive 511.800,
511.801,
Air Power Line 511.610,
Battery Power Line 530.610,
TRS 05.001.224,
05.001.223, 05.001.240,
Battery Power Line II
530.710

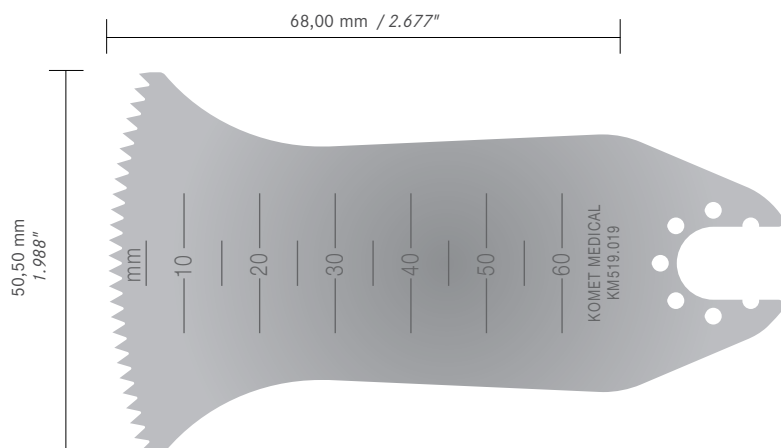

REF	KM519.019 STE						
Blattstärke	0,60 mm	Schnittstärke	0,80 mm				
Material Thickness	0.024"	Cutting Thickness	0.031"				
REF	KM519.019						
Blattstärke	0,60 mm	Schnittstärke	0,80 mm				
Material Thickness	0.024"	Cutting Thickness	0.031"				

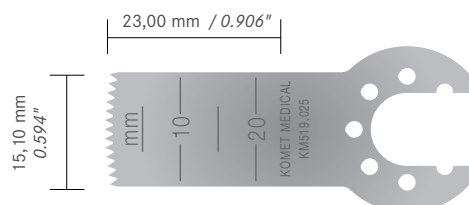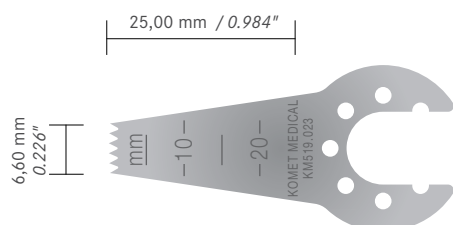

REF	KM519.023 STE			REF	KM519.025 STE		
Blattstärke	0,40 mm	Schnittstärke	0,60 mm	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
Material Thickness	0.016"	Cutting Thickness	0.024"	Material Thickness	0.016"	Cutting Thickness	0.024"
REF	KM519.023			REF	KM519.025		
Blattstärke	0,40 mm	Schnittstärke	0,60 mm	Blattstärke	0,40 mm	Schnittstärke	0,60 mm
Material Thickness	0.016"	Cutting Thickness	0.024"	Material Thickness	0.016"	Cutting Thickness	0.024"


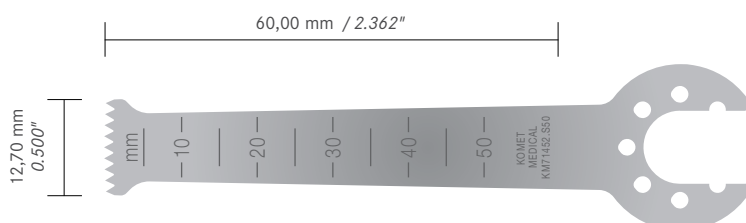


REF	KM71452.S50 STE						
Blattstärke	0,60 mm	Schnittstärke	0,80 mm				
Material Thickness	0.024"	Cutting Thickness	0.031"				
REF	KM71452.S50						
Blattstärke	0,60 mm	Schnittstärke	0,80 mm				
Material Thickness	0.024"	Cutting Thickness	0.031"				









Kompatible Anschlüsse
compatible connections:
Colibri II 532-021

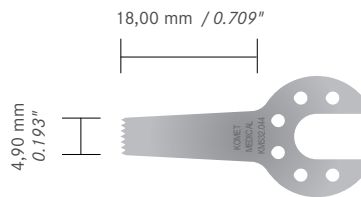



STERILE	5	REF	PC532.041 STE	Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"
NON STERILE	5	REF	PC532.041	Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"
STERILE	5	REF	KM532.044 STE	Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"
NON STERILE	5	REF	KM532.044	Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"

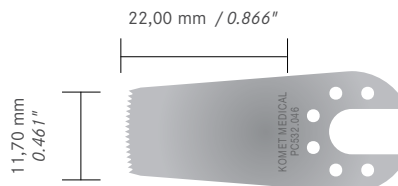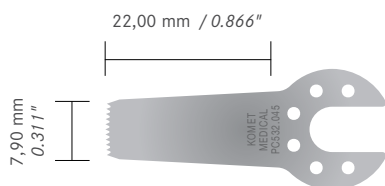

STERILE	5	REF	PC532.045 STE	Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"
NON STERILE	5	REF	PC532.045	Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"
STERILE	5	REF	PC532.046 STE	Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"
NON STERILE	5	REF	PC532.046	Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"

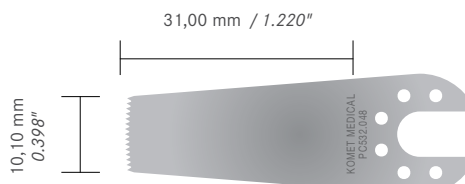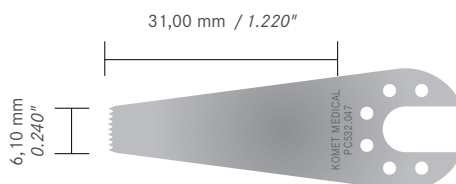



STERILE	5	REF	PC532.047 STE	Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"
NON STERILE	5	REF	PC532.047	Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"
STERILE	5	REF	PC532.048 STE	Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"
NON STERILE	5	REF	PC532.048	Blattstärke Material Thickness	0,30 mm 0.012"	Schnittstärke Cutting Thickness	0,40 mm 0.016"

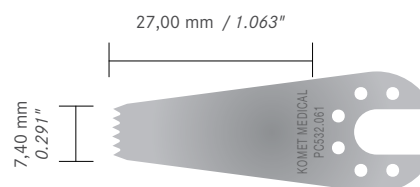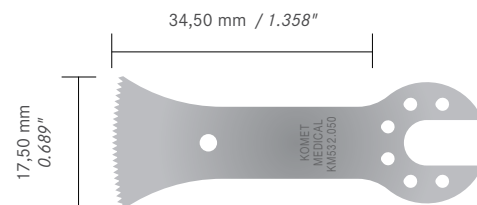


STERILE	5	REF	KM532.050 STE	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"
NON STERILE	5	REF	KM532.050	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"
STERILE	5	REF	PC532.061 STE	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,70 mm 0.028"
NON STERILE	5	REF	PC532.061	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,70 mm 0.028"



Kompatible Anschlüsse
compatible connections:
Colibri II 532-021

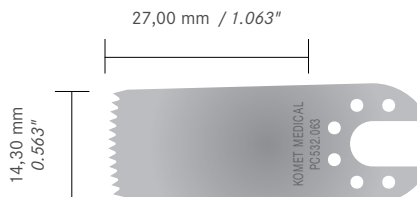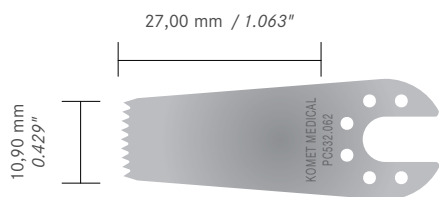


REF	PC532.062 STE	Schnittstärke	0,70 mm	REF	PC532.063 STE	Schnittstärke	0,70 mm	5	STERILE
Blattstärke	0,40 mm	Cutting Thickness	0,028"	Blattstärke	0,40 mm	Cutting Thickness	0,028"		
Material Thickness	0.016"			Material Thickness	0.016"				
REF	PC532.062	Schnittstärke	0,70 mm	REF	PC532.063	Schnittstärke	0,70 mm	5	NON STERILE
Blattstärke	0,40 mm	Cutting Thickness	0,028"	Blattstärke	0,40 mm	Cutting Thickness	0,028"		
Material Thickness	0.016"			Material Thickness	0.016"				

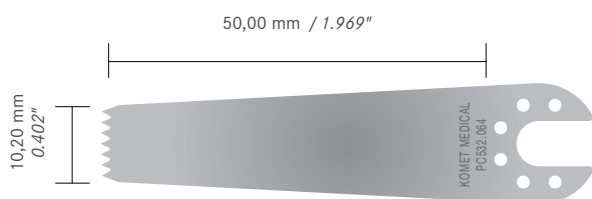

REF	PC532.064 STE	Schnittstärke	0,70 mm	5	STERILE
Blattstärke	0,40 mm	Cutting Thickness	0,028"		
Material Thickness	0.016"				
REF	PC532.064	Schnittstärke	0,70 mm	5	NON STERILE
Blattstärke	0,40 mm	Cutting Thickness	0,028"		
Material Thickness	0.016"				



REF	PC532.065 STE	Schnittstärke	0,70 mm	5	STERILE
Blattstärke	0,40 mm	Cutting Thickness	0,028"		
Material Thickness	0.016"				
REF	PC532.065	Schnittstärke	0,70 mm	5	NON STERILE
Blattstärke	0,40 mm	Cutting Thickness	0,028"		
Material Thickness	0.016"				

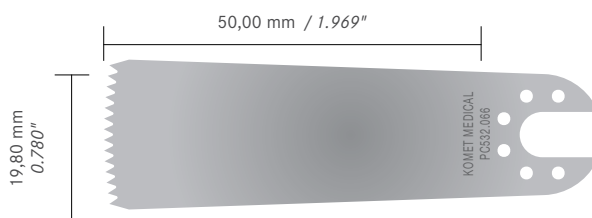


REF	PC532.066 STE	Schnittstärke	0,70 mm	5	STERILE
Blattstärke	0,40 mm	Cutting Thickness	0,028"		
Material Thickness	0.016"				
REF	PC532.066	Schnittstärke	0,70 mm	5	NON STERILE
Blattstärke	0,40 mm	Cutting Thickness	0,028"		
Material Thickness	0.016"				





Kompatible Anschlüsse
compatible connections:
Colibri II 532-021

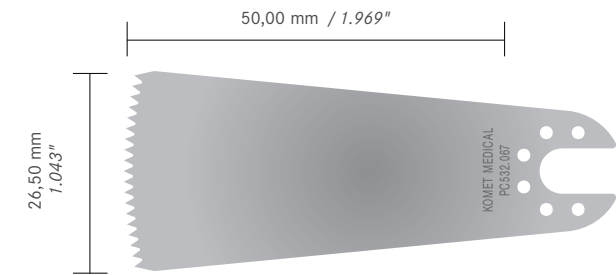

REF

Blattstärke
Material Thickness

PC532.067 STE

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,70 mm
0.028"



REF

Blattstärke
Material Thickness


PC532.067

0,40 mm
0.016"

Schnittstärke
Cutting Thickness

0,70 mm
0.028"

Kompatible Anschlüsse
compatible connections:
Compact Air Drive/
Power Drive 511.902,
Air Power Line 511.610,
Battery Power Line 530.615,
TRS 05.001.225,
Battery Power Line II 530.715

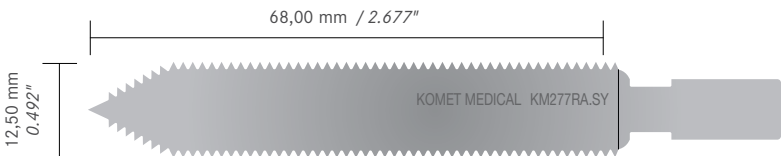

neu
new



REF


Blattstärke
Material Thickness

KM277RA.SY STE

1,00 mm
0.039"

Schnittstärke
Cutting Thickness

1,20 mm
0.047"

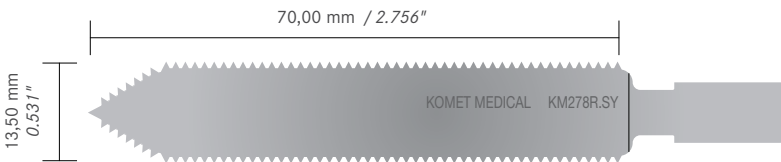

REF


Blattstärke
Material Thickness

KM278R.SY STE

0,60 mm
0.024"

Schnittstärke
Cutting Thickness

1,00 mm
0.039"

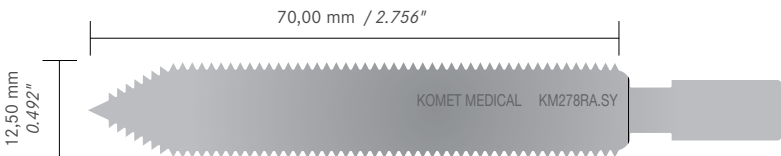

neu
new



REF

Blattstärke
Material Thickness


KM278RA.SY STE

0,60 mm
0.024"

Schnittstärke
Cutting Thickness

1,00 mm
0.039"



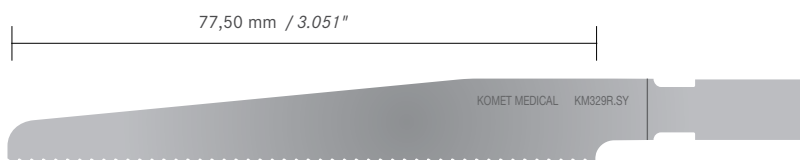

Kompatible Anschlüsse
compatible connections:
Compact Air Drive /
Power Drive 511.902,
Air Power Line 511.610,
Battery Power Line 530.615,
TRS 05.001.225,
Battery Power Line II 530.715

REF

Blattstärke
Material Thickness

KM329R.SY STE


1,00 mm
0.039"

Schnittstärke
Cutting Thickness

1,20 mm
0.047"



STERILE

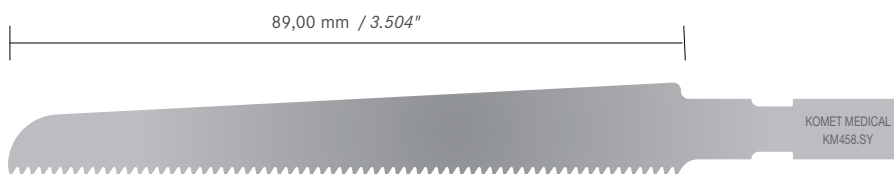

REF

Blattstärke
Material Thickness

KM458.SY STE

1,20 mm
0.047"

Schnittstärke
Cutting Thickness

1,40 mm
0.055"



STERILE






EZblade®


steril verpackte Sägeblätter für den Mehrfachgebrauch
sterile packed saw blades for multiple use

Zimmer Biomet


Kompatible Anschlüsse
compatible connections:
Zimmer Universal Power
System, 89-8509-450-60

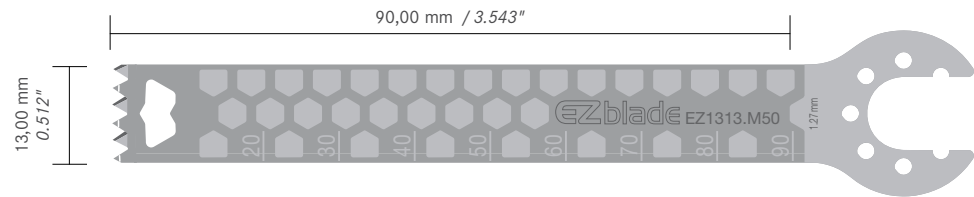

STERILE	1	REF	EZ1310.M50 STE	EZ1312.M50 STE	EZ1313.M50 STE	EZ1314.M50 STE		
		Schnittstärke	1,00 mm	1,19 mm	1,27 mm	1,37 mm		
		Cutting Thickness	0.039"	0.047"	0.050"	0.054"		

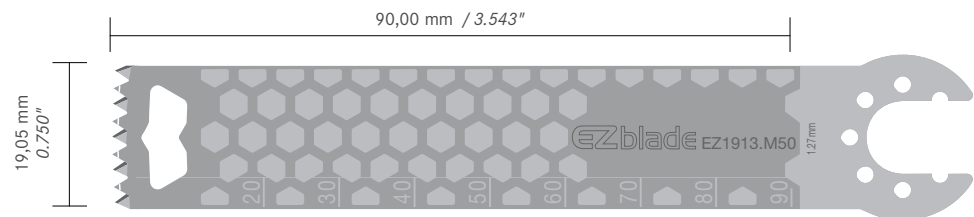


STERILE	1	REF	EZ1912.M50 STE	EZ1913.M50 STE	EZ1914.M50 STE			
		Schnittstärke	1,19 mm	1,27 mm	1,37 mm			
		Cutting Thickness	0.047"	0.050"	0.054"			

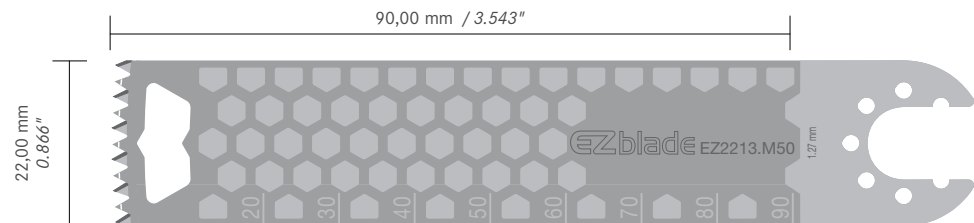


STERILE	1	REF	EZ2210.M50 STE	EZ2212.M50 STE	EZ2213.M50 STE	EZ2214.M50 STE	EZ2215.M50 STE	
		Schnittstärke	1,00 mm	1,19 mm	1,27 mm	1,37 mm	1,47 mm	
		Cutting Thickness	0.039"	0.047"	0.050"	0.054"	0.058"	




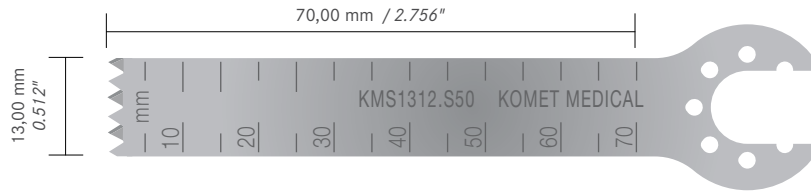


REF	KMS1312.S50 STE										STERILE
Schnittstärke Cutting Thickness	1,19 mm 0.047"										

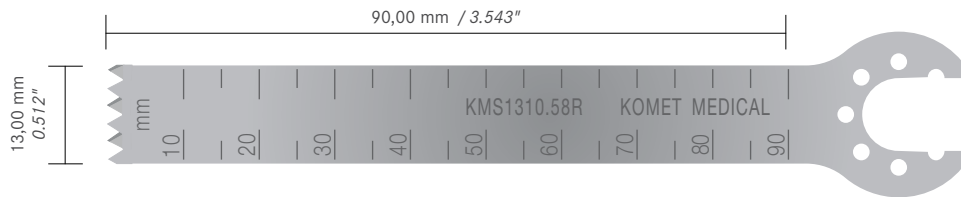

REF	KMS1310.58R STE	KMS1312.59J STE	KMS1313.57S STE								STERILE
Schnittstärke Cutting Thickness	1,00 mm 0.039"	1,19 mm 0.047"	1,27 mm 0.050"								

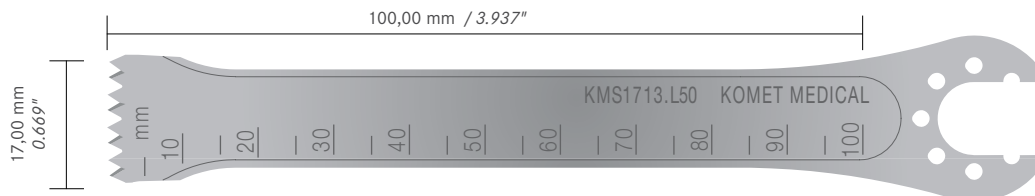

REF	KMS1713.L50 STE	KMS1714.L50 STE									STERILE
Schnittstärke Cutting Thickness	1,27 mm 0.050"	1,37 mm 0.054"									

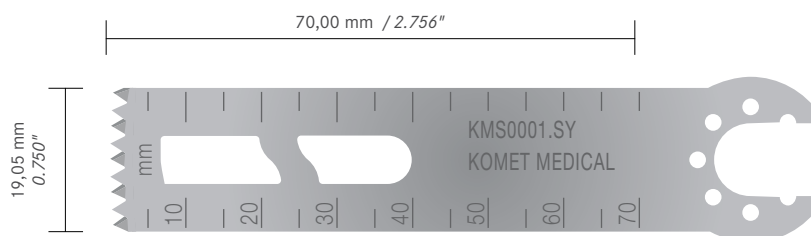


REF	KMS0001.SY STE										STERILE
Schnittstärke Cutting Thickness	1,00 mm 0.039"										



KMS ② 10

steril verpackte Sägeblätter für den Einmalgebrauch
sterile packed saw blades for single use

Kompatible Anschlüsse
compatible connections:
Zimmer Universal Power
System, 89-8509-450-60

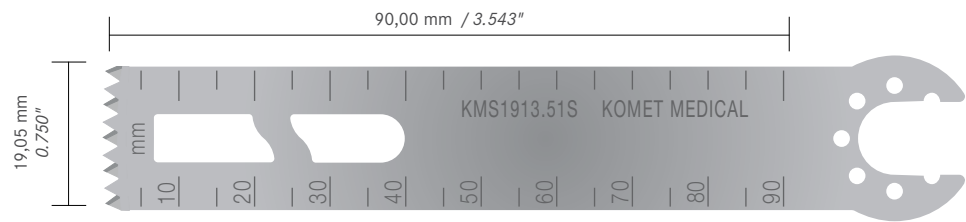


REF
Schnittstärke
Cutting Thickness

KMS1909.52R STE
0,89 mm
0.035"

KMS1913.51S STE
1,27 mm
0.050"


KMS1914.51T STE
1,37 mm
0.054"

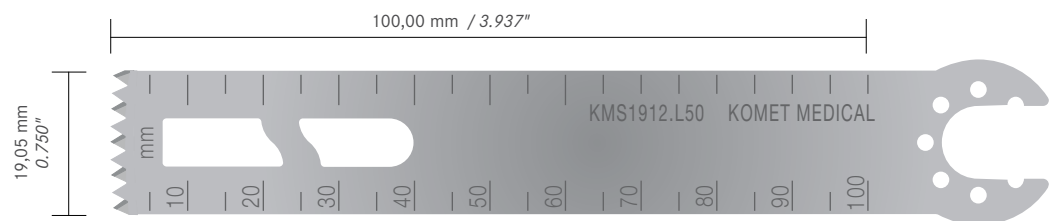

REF
Schnittstärke
Cutting Thickness

KMS1912.L50 STE
1,19 mm
0.047"

KMS1913.L50 STE
1,27 mm
0.050"

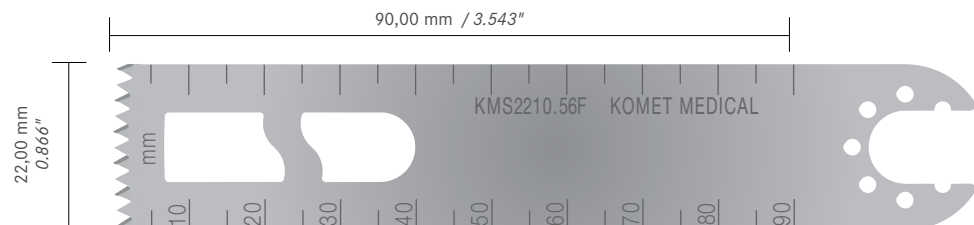

REF
Schnittstärke
Cutting Thickness

KMS2210.56F STE
1,00 mm
0.039"

KMS2213.57F STE
1,27 mm
0.050"




REF
Schnittstärke
Cutting Thickness

KMS2212F.M50 STE
1,19 mm
0.047"

KMS2213F.M50 STE
1,27 mm
0.050"



Kompatible Anschlüsse
compatible connections:
Zimmer Universal Power
System, 89-8509-450-60

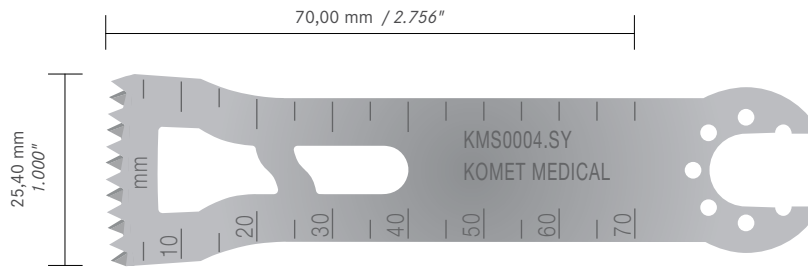

REF

Schnittstärke
Cutting Thickness


KMS0004.SY STE

1,00 mm
0.039"



STERILE

2

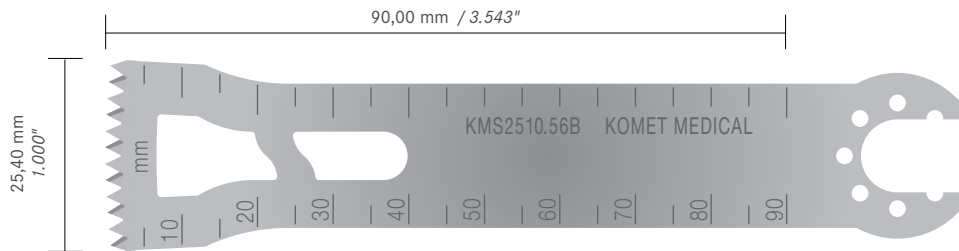

REF

Schnittstärke
Cutting Thickness

KMS2509.55R STE

0,89 mm
0.035"

KMS2510.56B STE

1,00 mm
0.039"

KMS2512.55J STE

1,19 mm
0.047"

KMS2513.55S STE

1,27 mm
0.050"


KMS2514.55T STE

1,37 mm
0.054"



STERILE

2

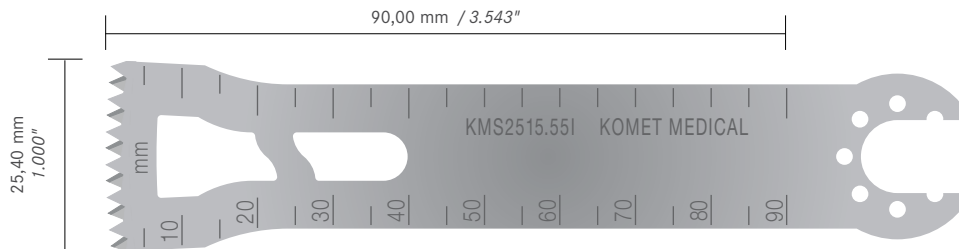

REF

Schnittstärke
Cutting Thickness


KMS2515.55I STE

1,47 mm
0.058"



STERILE

2

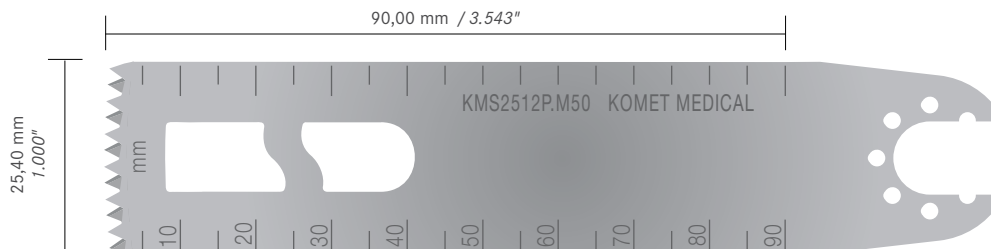

REF

Schnittstärke
Cutting Thickness

KMS2512P.M50 STE

1,19 mm
0.047"



STERILE


2



EVOLUTION

unsteril verpackte Sägeblätter für den Mehrfachgebrauch
nonsterile packed saw blades for multiple use

Kompatible Anschlüsse
compatible connections:
Zimmer Universal Power
System, 89-8509-450-60

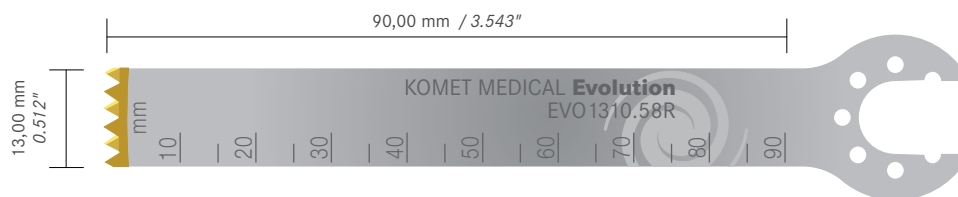


REF
Schnittstärke
Cutting Thickness

EVO1310.58R
1,00 mm
0.039"

EVO1312.59J
1,19 mm
0.047"

EVO1313.57S
1,27 mm
0.050"

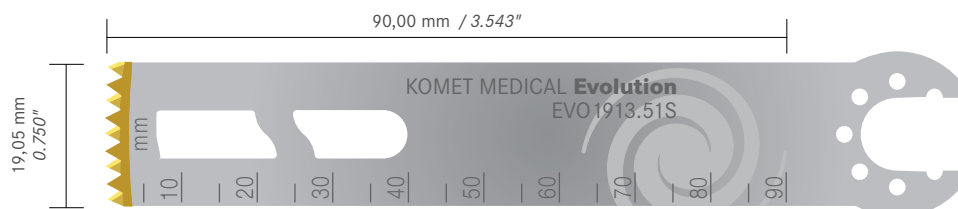


REF
Schnittstärke
Cutting Thickness

EVO1909.52R
0,89 mm
0.035"

EVO1913.51S
1,27 mm
0.050"

EVO1914.51T
1,37 mm
0.054"

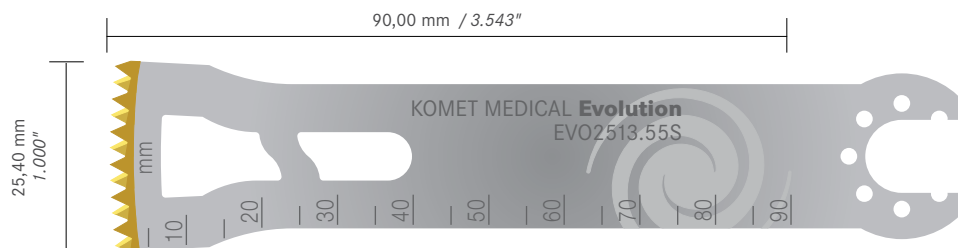


REF
Schnittstärke
Cutting Thickness


EVO2510.56B
1,00 mm
0.039"

EVO2513.55S
1,27 mm
0.050"




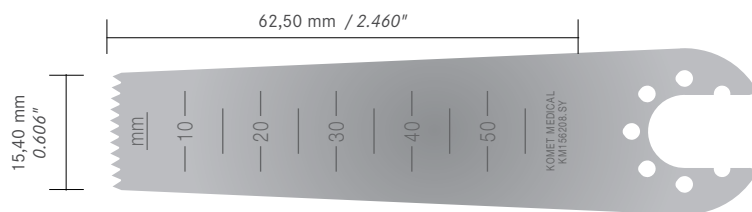


REF	KM156208.SY STE				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		STERILE
REF	KM156208.SY				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		NON STERILE

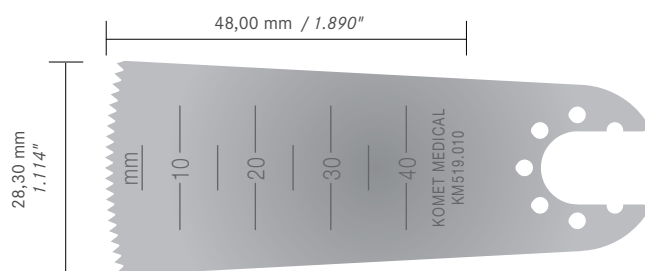

REF	KM519.010 STE				
Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		STERILE
REF	KM519.010				
Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		NON STERILE

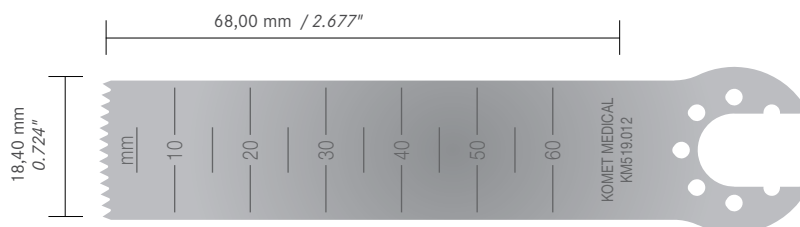


REF	KM519.012 STE				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		STERILE
REF	KM519.012				
Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		NON STERILE

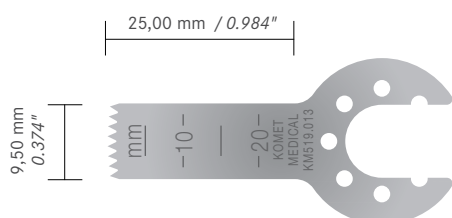


REF	KM519.013 STE				
Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		STERILE
REF	KM519.013				
Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		NON STERILE




Kompatible Anschlüsse
compatible connections:
Zimmer Universal Power
System, 89-8509-450-60

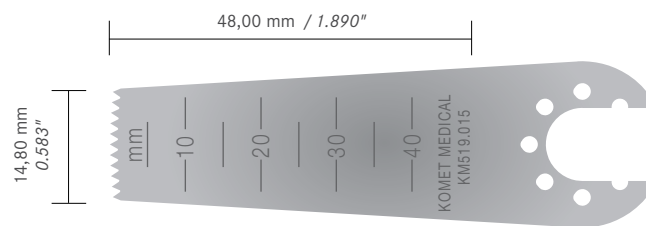


STERILE		REF	KM519.015 STE		
		Blattstärke	0,40 mm	Schnittstärke	0,60 mm
		Material Thickness	0.016"	Cutting Thickness	0.024"
		REF	KM519.015		
		Blattstärke	0,40 mm	Schnittstärke	0,60 mm
		Material Thickness	0.016"	Cutting Thickness	0.024"

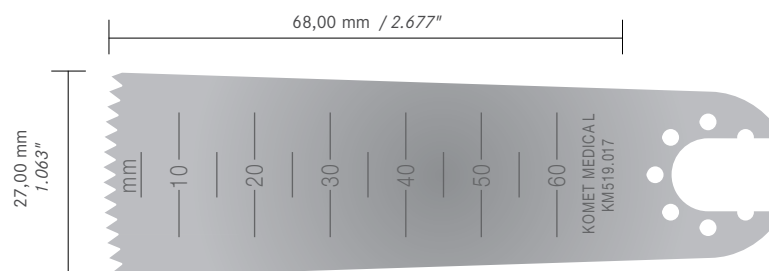

STERILE		REF	KM519.017 STE		
		Blattstärke	0,60 mm	Schnittstärke	0,80 mm
		Material Thickness	0.024"	Cutting Thickness	0.031"
		REF	KM519.017		
		Blattstärke	0,60 mm	Schnittstärke	0,80 mm
		Material Thickness	0.024"	Cutting Thickness	0.031"

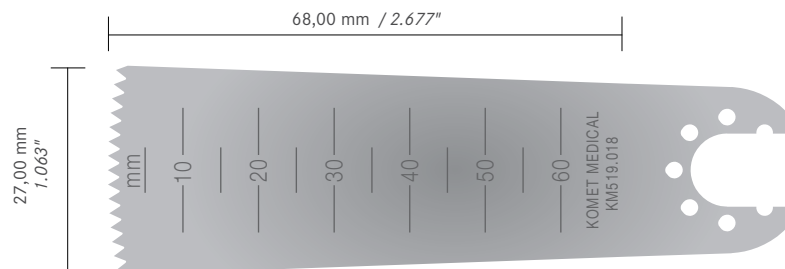


STERILE		REF	KM519.018 STE		
		Blattstärke	1,00 mm	Schnittstärke	1,20 mm
		Material Thickness	0.039"	Cutting Thickness	0.047"
		REF	KM519.018		
		Blattstärke	1,00 mm	Schnittstärke	1,20 mm
		Material Thickness	0.039"	Cutting Thickness	0.047"


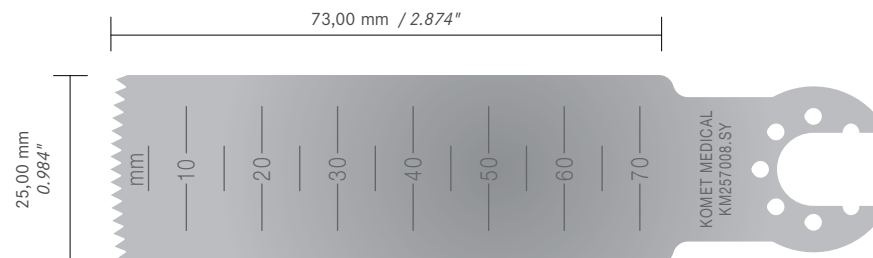


STERILE		REF	KM257008.SY STE		
		Blattstärke	0,60 mm	Schnittstärke	0,80 mm
		Material Thickness	0.024"	Cutting Thickness	0.031"
		REF	KM257008.SY		
		Blattstärke	0,60 mm	Schnittstärke	0,80 mm
		Material Thickness	0.024"	Cutting Thickness	0.031"




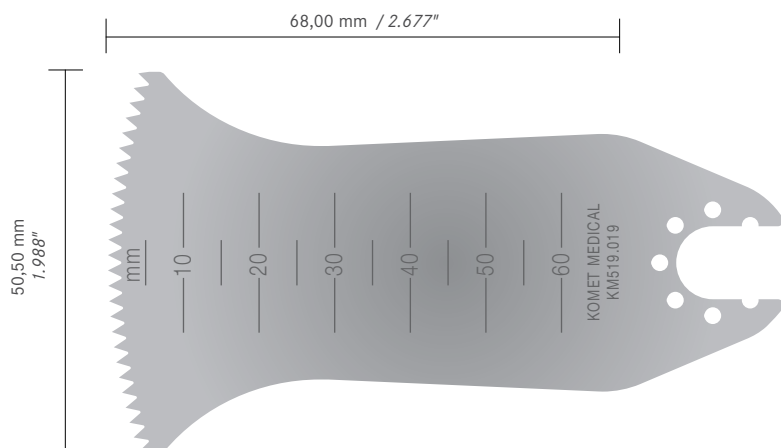

REF	KM519.019 STE	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		STERILE
REF	KM519.019	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		NON STERILE

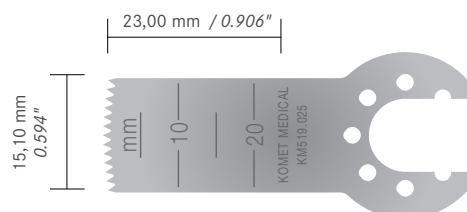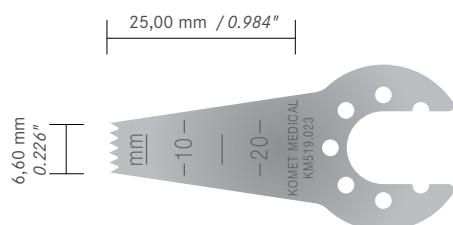


REF	KM519.023 STE	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		STERILE
REF	KM519.023	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		NON STERILE
REF	KM519.025 STE	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		STERILE
REF	KM519.025	Blattstärke Material Thickness	0,40 mm 0.016"	Schnittstärke Cutting Thickness	0,60 mm 0.024"		NON STERILE

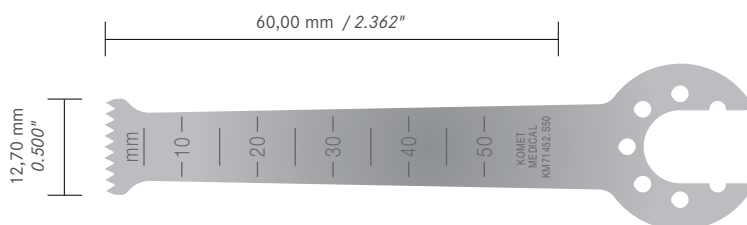

REF	KM71452.S50 STE	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		STERILE
REF	KM71452.S50	Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	0,80 mm 0.031"		NON STERILE




Kompatible Anschlüsse
compatible connections:
Zimmer Universal Power
System, 89-8509-45 1-20

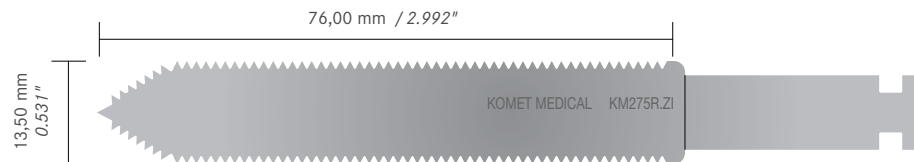


neu
new

STERILE ②		REF	KM275R.ZI STE		
		Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

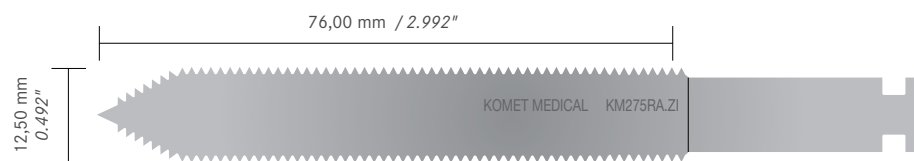


neu
new

STERILE ②		REF	KM275RA.ZI STE		
		Blattstärke Material Thickness	0,60 mm 0.024"	Schnittstärke Cutting Thickness	1,00 mm 0.039"

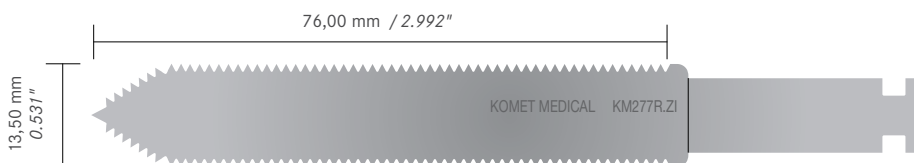

neu
new

STERILE ②		REF	KM277R.ZI STE		
		Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"

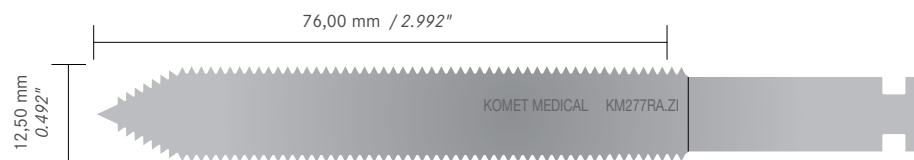


neu
new


STERILE ②		REF	KM277RA.ZI STE		
		Blattstärke Material Thickness	1,00 mm 0.039"	Schnittstärke Cutting Thickness	1,20 mm 0.047"



Kompatible Anschlüsse
compatible connections:
Zimmer Universal Power
System, 89-8509-45 1-20

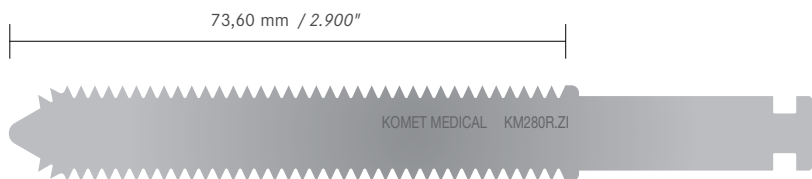


REF	KM280R.ZI STE				
Blattstärke	0,89 mm	Schnittstärke	0,89 mm		
Material Thickness	0.035"	Cutting Thickness	0.035"		

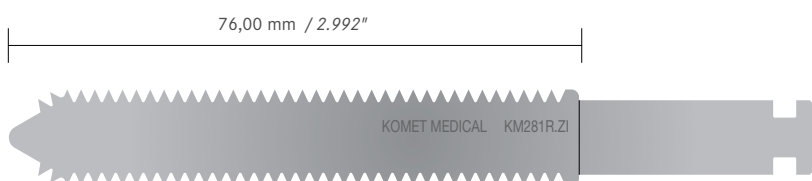


neu
new

REF	KM281R.ZI STE				
Blattstärke	1,19 mm	Schnittstärke	1,19 mm		
Material Thickness	0.047"	Cutting Thickness	0.047"		

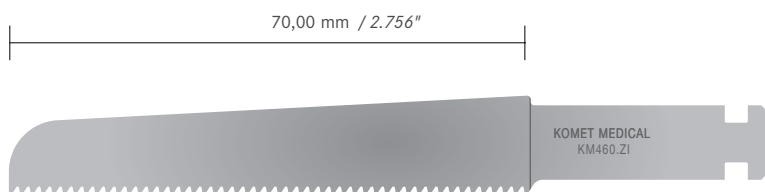

REF	KM460.ZI STE				
Blattstärke	1,00 mm	Schnittstärke	1,20 mm		
Material Thickness	0.039"	Cutting Thickness	0.047"		

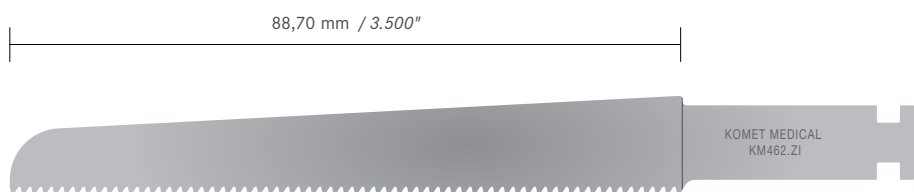

REF	KM462.ZI STE				
Blattstärke	1,00 mm	Schnittstärke	1,20 mm		
Material Thickness	0.039"	Cutting Thickness	0.047"		





Pins für die Knieendoprothetik

Pins for knee joint endoprosthesis



Pins für die Knieendoprothetik

Bohr- und Schraubpins spielen eine elementare Rolle bei der Fixierung von Knie-schablonen.

Die Bohrpins ermöglichen das zwischenzeitliche Abziehen der Schablone, ohne dass die Pins vorher gelöst werden müssen. So kann die Schablone im Nachgang wieder auf die gleiche Position gesetzt werden. Die Schraubpins fixieren die Schablone mit Anpresskraft und müssen vor Ablegen der Schablone entfernt werden.


Pins for knee joint endoprosthesis

Guide pins and screw pins play an essential role in the fixation of cutting blocks.

The guide pins allow interim removal of the jig without having to undo the pins beforehand.

Like that, the jig can be reattached to exactly the same position afterwards.

The guide screws fix the jig by means of contact pressure. They have to be unscrewed prior to removing the block.



magnetisierbarer
Stahl/magnetisch
magnetizable
steel/magnetic



Single Use



Bohrpins · Schraubpins Pins · Screws



Schlüsselweite
Wrench Width



4-kant
Square




6-kant
Hexagon



Rund
Round



3-kant
Triangle



Gewindelänge (GL)
Thread Length (TL)



magnetisierbarer
Stahl
magnetizable steel



Single Use

Guide Pins



Universal Fluted Pin 	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GP001A.076.031 STE 	3,2	76,0	56,0	4-kant/Square 	2,25
GP001A.076.031	3,2	76,0	56,0	4-kant/Square 	2,25



Universal Fluted Pin	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GP001.089.032 STE	3,2	89,0	70,0	4-kant/Square 	2,25
GP001.089.032	3,2	89,0	70,0	4-kant/Square 	2,25



Universal Fluted Pin 	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GP001A.089.032 STE	3,2	89,0	70,0	4-kant/Square 	2,25
GP001A.089.032	3,2	89,0	70,0	4-kant/Square 	2,25



Smooth Pin 	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GP002A.089.032 STE 	3,2	89,0	-	4-kant/Square 	2,25
GP002A.089.032	3,2	89,0	-	4-kant/Square 	2,25



Headed Pin	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GP003A.019.030 STE 	3,0	19,0	-	-	-
GP003A.019.030	3,0	19,0	-	-	-
GP003A.027.030 STE 	3,0	27,0	-	-	-
GP003A.027.030	3,0	27,0	-	-	-
GP003A.035.030 STE 	3,0	35,0	-	-	-
GP003A.035.030	3,0	35,0	-	-	-
GP003A.038.030 STE 	3,0	38,0	-	-	-
GP003A.038.030	3,0	38,0	-	-	-



Bohrpins • Schraubpins Pins • Screws



Schlüsselweite
Wrench Width



4-kant
Square




6-kant
Hexagon



Rund
Round



3-kant
Triangle



Länge (L)
Length (L)
Gewindelänge (GL)
Thread Length (TL)



magnetisierbarer
Stahl
magnetizable steel



Single Use

Guide Pins



Smooth Pin		Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GP003B.076.032 STE	neu new	3,2	76,0	-	Rund/Round ●	-
GP003B.076.032		3,2	76,0	-	Rund/Round ●	-
GP003B.127.032 STE	neu new	3,2	127,0	-	Rund/Round ●	-
GP003B.127.032		3,2	127,0	-	Rund/Round ●	-



Drill Pin		Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GP005.076.032 STE	neu new	3,2	76,0	55,5	3-kant/Triangle ▼	2,78
GP005.076.032		3,2	76,0	55,5	3-kant/Triangle ▼	2,78



Fluted Pin		Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GP007.075.032 STE	neu new	3,2	75,0	30,0	6-kant/Hexagon ●	2,5
GP007.075.032		3,2	75,0	30,0	6-kant/Hexagon ●	2,5



Bohrpins · Schraubpins Pins · Screws



Schlüsselweite
Wrench Width



4-kant
Square




6-kant
Hexagon



Rund
Round



3-kant
Triangle



Gewindelänge (GL)
Thread Length (TL)



magnetisierbarer
Stahl
magnetizable steel



Single Use

Guide Screws



Headed Threaded 	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS901.033.032 STE	3,2	33,0	30,0	6-kant/Hexagon 	2,5
GS901.033.032	3,2	33,0	30,0	6-kant/Hexagon 	2,5



Headed Threaded 	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS901.050.032 STE	3,2	50,0	46,0	6-kant/Hexagon 	2,5
GS901.050.032	3,2	50,0	46,0	6-kant/Hexagon 	2,5



Headless Threaded 	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS901A.050.032 STE	3,2	50,0	46,0	6-kant/Hexagon 	2,5
GS901A.050.032	3,2	50,0	46,0	6-kant/Hexagon 	2,5



Headed Threaded 	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS905.030.032 STE	3,2	30,0	26,0	6-kant/Hexagon 	3,5
GS905.030.032	3,2	30,0	26,0	6-kant/Hexagon 	3,5



Headed Threaded 	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS905.050.032 STE	3,2	50,0	46,0	6-kant/Hexagon 	3,5
GS905.050.032	3,2	50,0	46,0	6-kant/Hexagon 	3,5



Headed Threaded 	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS903.062.032 STE	3,2	62,5	46,0	4-kant/Square 	2,25
GS903.062.032	3,2	62,5	46,0	4-kant/Square 	2,25



Bohrpins · Schraubpins Pins · Screws



Schlüsselweite
Wrench Width



4-kant
Square




6-kant
Hexagon



Rund
Round



3-kant
Triangle



Länge (L)
Length (L)
Gewindelänge (GL)
Thread Length (TL)



magnetisierbarer
Stahl
magnetizable steel



Single Use

Guide Screws



Headless Threaded	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS903A.062.032 STE	3.2	62.5	46.0	4-kant/Square	2.25
GS903A.062.032	3.2	62.5	46.0	4-kant/Square	2.25



Headed Threaded	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS907.067.032 STE	3.2	67.0	39.0	3-kant/Triangle	2,78
GS907.067.032	3.2	67.0	39.0	3-kant/Triangle	2,78



Headless Threaded	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS907A.076.032 STE	3.2	76.0	55.5	3-kant/Triangle	2,78
GS907A.076.032	3.2	76.0	55.5	3-kant/Triangle	2,78



Headed Threaded	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS908.056.032 STE	3.2	56.0	45.0	Z Schaft/Z Shank	-
GS908.056.032	3.2	56.0	45.0	Z Schaft/Z Shank	-



Headed Threaded	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS909.027.032 STE	3.2	27.0	24.0	Innen 6-kant/Inner Hexagon	-
GS909.027.032	3.2	27.0	24.0	Innen 6-kant/Inner Hexagon	-



Bohrpins · Schraubpins Pins · Screws



Schlüsselweite
Wrench Width



4-kant
Square




6-kant
Hexagon



Rund
Round



3-kant
Triangle



magnetisierbarer
Stahl
magnetizable steel



Single Use

Navigation Pins



Pin (lang)/Long Pin	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS902.150.032 STE	3,2	150,0	51,0	Rund/Round ●	-
GS902.150.032	3,2	150,0	51,0	Rund/Round ●	-



Pin (lang)/Long Pin	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS904.100.030 STE	3,0	100,0	26,0	4-kant/Square ■	2,25
GS904.100.030	3,0	100,0	26,0	4-kant/Square ■	2,25



Pin (lang)/Long Pin	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS904.150.030 STE	3,0	150,0	26,0	4-kant/Square ■	2,25
GS904.150.030	3,0	150,0	26,0	4-kant/Square ■	2,25



Pin (lang)/Long Pin	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS904.100.040 STE	4,0	100,0	25,0	4-kant/Square ■	2,25
GS904.100.040	4,0	100,0	25,0	4-kant/Square ■	2,25



Pin (lang)/Long Pin	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS910.110.032 STE	3,2	110,0	50,0	Rund/Round ●	-
GS910.110.032	3,2	110,0	50,0	Rund/Round ●	-

neu
new



Pin (lang)/Long Pin	Ø (mm)	L (mm)	GL/TL (mm)	Schaft/Shank	Schlüsselweite/Wrench Width (mm)
GS910.140.032 STE	3,2	140,0	50,0	Rund/Round ●	-
GS910.140.032	3,2	140,0	50,0	Rund/Round ●	-

neu
new



Bohrpins · Schraubpins Pins · Screws



Schlüsselweite
Wrench Width



4-kant
Square




6-kant
Hexagon



Rund
Round



3-kant
Triangle



Gewindelänge (GL)
Thread Length (TL)



magnetisierbarer
Stahl
magnetizable steel



Single Use

Navigation Pins



Pin (lang) / Long Pin	Ø (mm)	L (mm)	GL/TL (mm)	Schaft / Shank	Schlüsselweite / Wrench Width (mm)
GS910.080.040 STE neu new	4.0	80.0	50.0	4-kant / Square ■	3.0
GS910.080.040	4.0	80.0	50.0	4-kant / Square ■	3.0



Pin (lang) / Long Pin	Ø (mm)	L (mm)	GL/TL (mm)	Schaft / Shank	Schlüsselweite / Wrench Width (mm)
GS910.110.040 STE neu new	4.0	110.0	50.0	4-kant / Square ■	3.0
GS910.110.040	4.0	110.0	50.0	4-kant / Square ■	3.0



Pin (lang) / Long Pin	Ø (mm)	L (mm)	GL/TL (mm)	Schaft / Shank	Schlüsselweite / Wrench Width (mm)
GS910.140.040 STE neu new	4.0	140.0	50.0	4-kant / Square ■	3.0
GS910.140.040	4.0	140.0	50.0	4-kant / Square ■	3.0



Pin (lang) / Long Pin	Ø (mm)	L (mm)	GL/TL (mm)	Schaft / Shank	Schlüsselweite / Wrench Width (mm)
GS910.170.040 STE neu new	4.0	170.0	50.0	4-kant / Square ■	3.0
GS910.170.040	4.0	170.0	50.0	4-kant / Square ■	3.0



Bohrpins · Schraubpins

Pins · Screws




6-kant / Hexagon



4-kant / Square



3-kant / Triangle

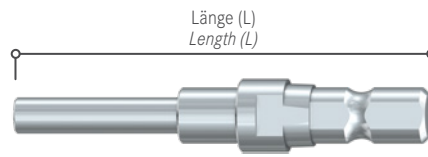

magnetisch
magnetic

Driver | Pin Adapter



Pin Adapter		L (mm)	Schlüsselform / Wrench shape	Schlüsselweite / Wrench Width (mm)	Schaft / Shank
GS900.055.010		55,0	4-kant / Square	2.25	Zimmer / Hudson
GS900.055.020		55,0	3-kant / Triangle	2.78	Zimmer / Hudson



Pin Adapter		L (mm)	Schlüsselform / Wrench shape	Schlüsselweite / Wrench Width (mm)	Schaft / Shank
GS900.100.000		100,0	6-kant / Hexagon	2.5	Zimmer / Hudson
GS900.100.010		100,0	4-kant / Square	2.25	Zimmer / Hudson



Pin Adapter		L (mm)	Schlüsselform / Wrench shape	Schlüsselweite / Wrench Width (mm)	Schaft / Shank
GS900.130.000		130,0	6-kant / Hexagon	2.5	Zimmer / Hudson



Pin Adapter		L (mm)	Schlüsselform / Wrench shape	Schlüsselweite / Wrench Width (mm)	Schaft / Shank
GS900A.040.000		40,0	4-kant / Square	2.25	AO



Spiralbohrer


Twist drills





Spiralbohrer • AO

Twist drills • AO




S 27...	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	effektive Länge/effective length (mm)	Anschluss/Connection
S2709.098 STE	1,1	2	16	60	30	AO
S2709.098	1,1	2	16	60	30	AO
S2710.098 STE	1,5	2	30	85	55	AO
S2710.098	1,5	2	30	85	55	AO
S2711.098 STE	1,5	2	30	110	80	AO
S2711.098	1,5	2	30	110	80	AO
S2712.098 STE	1,5	2	30	125	95	AO
S2712.098	1,5	2	30	125	95	AO
S2713.098 STE	1,8	2	30	100	70	AO
S2713.098	1,8	2	30	100	70	AO
S2714.098 STE	2,0	2	50	100	70	AO
S2714.098	2,0	2	50	100	70	AO
S2715.098 STE	2,0	2	50	125	95	AO
S2715.098	2,0	2	50	125	95	AO
S2716.098 STE	2,4	2	50	100	70	AO
S2716.098	2,4	2	50	100	70	AO
S2717.098 STE (gold/golden)	2,5	2	50	180	150	AO
S2717.098 (gold/golden)	2,5	2	50	180	150	AO
S2718.098 STE (gold/golden)	2,5	2	50	110	80	AO
S2718.098 (gold/golden)	2,5	2	50	110	80	AO
S2719.098 STE	2,7	2	50	100	70	AO
S2719.098	2,7	2	50	100	70	AO
S2720.098 STE	2,7	2	50	125	95	AO
S2720.098	2,7	2	50	125	95	AO
S2721.098 STE	3,2	2	50	195	165	AO
S2721.098	3,2	2	50	195	165	AO
S2722.098 STE	3,2	2	50	145	115	AO
S2722.098	3,2	2	50	145	115	AO
S2723.098 STE	3,2	2	50	225	195	AO
S2723.098	3,2	2	50	225	195	AO
S2724.098 STE	3,5	2	50	110	80	AO
S2724.098	3,5	2	50	110	80	AO
S2725.098 STE	3,5	2	50	195	165	AO
S2725.098	3,5	2	50	195	165	AO
S2726.098 STE	4,0	2	50	225	195	AO
S2726.098	4,0	2	50	225	195	AO
S2727.098 STE	4,5	2	50	145	115	AO
S2727.098	4,5	2	50	145	115	AO
S2728.098 STE	4,5	2	50	195	165	AO
S2728.098	4,5	2	50	195	165	AO
S2729.098 STE	6,0	2	50	195	165	AO
S2729.098	6,0	2	50	195	165	AO



Spiralbohrer · Jakobs

Twist drills · Jacobs



S 27...	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	effektive Länge/effective length (mm)	Anschluss/Connection
S2730.501 STE	1,1	2	20	35	20	Jakobs
S2730.501	1,1	2	20	35	20	Jacobs
S2731.501 STE	1,5	2	40	60	40	Jakobs
S2731.501	1,5	2	40	60	40	Jacobs
S2732.501 STE	2,0	2	50	75	55	Jakobs
S2732.501	2,0	2	50	75	55	Jacobs
S2733.501 STE	2,5	2	50	135	115	Jakobs
S2733.501	2,5	2	50	135	115	Jacobs
S2734.501 STE	2,5	2	50	75	55	Jakobs
S2734.501	2,5	2	50	75	55	Jacobs
S2735.501 STE	2,5	2	50	95	75	Jakobs
S2735.501	2,5	2	50	95	75	Jacobs
S2736.501 STE	2,7	2	50	75	55	Jakobs
S2736.501	2,7	2	50	75	55	Jacobs
S2785.501 STE	2,8	2	50	145	125	Jakobs
S2785.501	2,8	2	50	145	125	Jacobs
S2737.502 STE	3,2	2	60	120	100	Jakobs
S2737.502	3,2	2	60	120	100	Jacobs
S2738.502 STE	3,2	2	60	170	150	Jakobs
S2738.502	3,2	2	60	170	150	Jacobs
S2788.502 STE	3,2	2	50	128	108	Jakobs
S2788.502	3,2	2	50	128	108	Jacobs
S2739.502 STE	3,5	2	60	90	70	Jakobs
S2739.502	3,5	2	60	90	70	Jacobs
S2724.501 STE	3,5	2	50	110	90	Jakobs
S2724.501	3,5	2	50	110	90	Jacobs
S2740.502 STE	3,5	2	60	170	150	Jakobs
S2740.502	3,5	2	60	170	150	Jacobs
S2741.502 STE	4,5	2	80	120	100	Jakobs
S2741.502	4,5	2	80	120	100	Jacobs
S2742.502 STE	4,5	2	80	170	150	Jakobs
S2742.502	4,5	2	80	170	150	Jacobs



Spiralbohrer · kanüliert · AO
Twist drills · cannulated · AO



SC 28...	Ø (mm)	Ø (mm) Kanülierung / Cannulation	S / FL #	KL / HL (mm)	GL / TL (mm)	effektive Länge / effective length (mm)	Anschluss / Connection
SC2805.098 STE	2,0	1,2	3	35	150	50	AO
SC2805.098	2,0	1,2	3	35	150	50	AO
SC2803.098 STE	2,7	1,4	4	50	160	130	AO
SC2803.098	2,7	1,4	4	50	160	130	AO
SC2801.098 STE	3,2	1,7	4	50	170	140	AO
SC2801.098	3,2	1,7	4	50	170	140	AO
SC2804.098 STE	3,5	1,4	4	50	160	130	AO
SC2804.098	3,5	1,4	4	50	160	130	AO
SC2802.098 STE	4,5	1,7	4	50	170	140	AO
SC2802.098	4,5	1,7	4	50	170	140	AO



Spiralbohrer · J-Notch

Twist drills · J-Notch




KL (Kopflänge)/HL (Head length)



S 27...	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	Anschluss/Connection
S2794.030 STE	1,1	2	5	50	J-Notch
S2794.030	1,1	2	5	50	J-Notch
S2795.030 STE	1,1	2	7	50	J-Notch
S2795.030	1,1	2	7	50	J-Notch
S27101.030 STE	1,1	2	20	50	J-Notch
S27101.030	1,1	2	20	50	J-Notch
S27102.030 STE	1,1	2	5	100	J-Notch
S27102.030	1,1	2	5	100	J-Notch
S27103.030 STE	1,1	2	20	100	J-Notch
S27103.030	1,1	2	20	100	J-Notch
S2790.030 STE	1,5	2	5	50	J-Notch
S2790.030	1,5	2	5	50	J-Notch
S2774.030 STE	1,5	2	7	50	J-Notch
S2774.030	1,5	2	7	50	J-Notch
S2791.030 STE	1,5	2	10	50	J-Notch
S2791.030	1,5	2	10	50	J-Notch
S27104.030 STE	1,5	2	20	50	J-Notch
S27104.030	1,5	2	20	50	J-Notch
S27113.030 STE	1,5	2	25	70	J-Notch
S27113.030	1,5	2	25	70	J-Notch
S27106.030 STE	1,5	2	5	100	J-Notch
S27106.030	1,5	2	5	100	J-Notch
S27105.030 STE	1,5	2	20	100	J-Notch
S27105.030	1,5	2	20	100	J-Notch
S2793.030 STE	1,5	2	11	105	J-Notch
S2793.030	1,5	2	11	105	J-Notch
S2792.030 STE	1,5	2	25	105	J-Notch
S2792.030	1,5	2	25	105	J-Notch
S27114.030 STE	1,5	2	25	125	J-Notch
S27114.030	1,5	2	25	125	J-Notch
S27107.030 STE	1,8	2	10	50	J-Notch
S27107.030	1,8	2	10	50	J-Notch
S27108.030 STE	1,8	2	20	50	J-Notch
S27108.030	1,8	2	20	50	J-Notch
S27109.030 STE	1,8	2	10	100	J-Notch
S27109.030	1,8	2	10	100	J-Notch
S27110.030 STE	1,8	2	20	100	J-Notch
S27110.030	1,8	2	20	100	J-Notch

Rotierende Instrumente

Rotary instruments

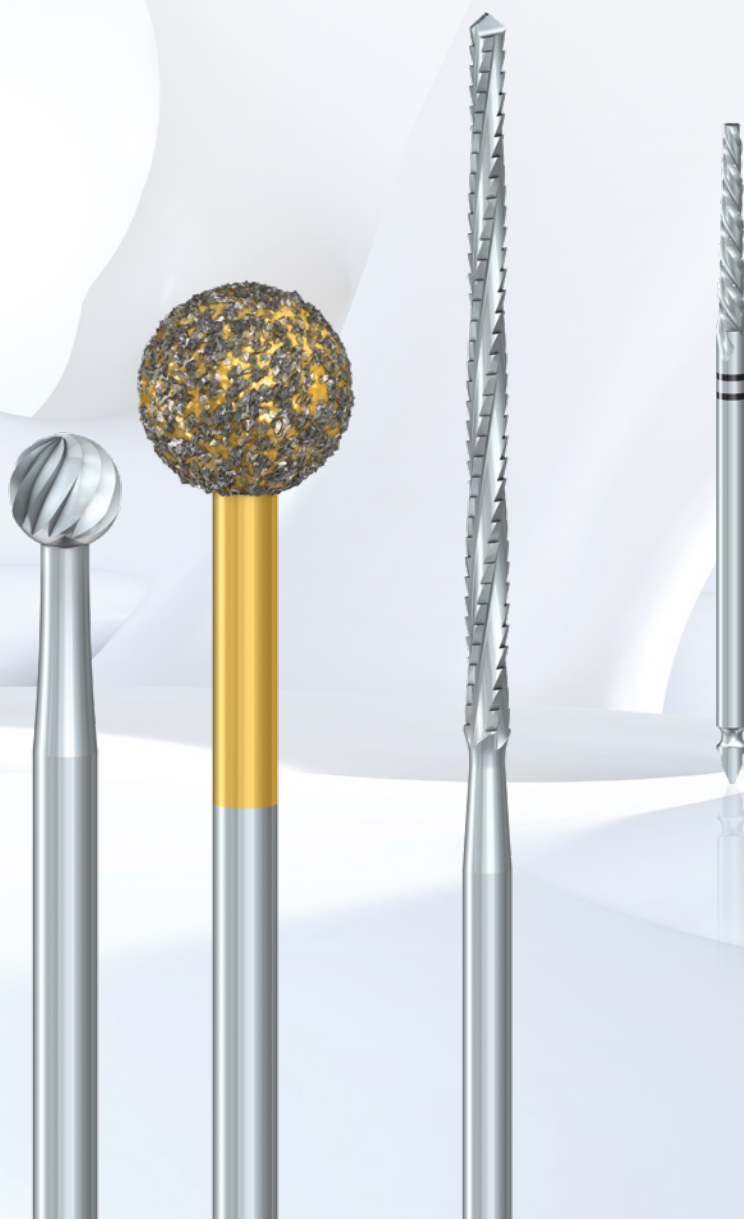

Inhalt *Content*

Seite *Page*

Tabellen und Bezeichnungen	<i>Tables and Description</i>	136
-------------------------------	-----------------------------------	-----

Nummernsystem	<i>Numbering system</i>	137
---------------	-------------------------	-----

Schaftarten	<i>Shank types</i>	138
-------------	--------------------	-----

Tabellen *Tables*

Rostfreier Stahl	<i>Stainless steel</i>	139 – 150
------------------	------------------------	-----------

Hartmetall	<i>Tungsten carbide</i>	151 – 155
------------	-------------------------	-----------

Diamant	<i>Diamond</i>	156 – 163
---------	----------------	-----------

Lindemannfräser	<i>Lindemann burs</i>	164 – 165
-----------------	-----------------------	-----------

Tabellen und Bezeichnungen

Tables and designations

#
Schneidenzahl
Number of flutes

A
Arbeitsteil
(vergrößerte Ansicht)
Working part
(enlarged view)

B
Strichzeichnung
(1:1)
Line drawing (1:1)

Ø
Kopfdurchmesser
Head diameter

KL
Kopflänge
Head length

L
L: Länge
L: Length

L: Länge
L: Length

Order-Nr.
Order-No.

High Speed


NS09...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 70	(L = mm) 51,4
				Round Shank	Aesculap Hilan XS
	4,0	10	9,5	NS0904.009 STE	NS2121.525 STE
	4,0	10	9,5	NS0904.009	NS2121.525

Round Shank

Aesculap® Hilan XS®

Nummernsystem · Rotierende Instrumente

Numbering system · Rotary instruments

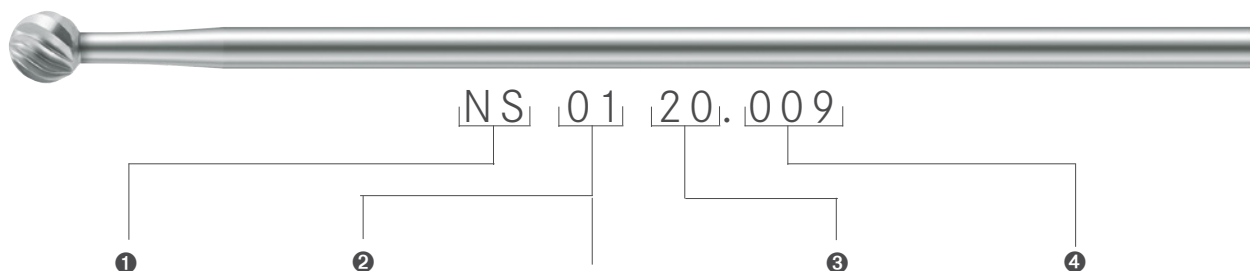

Material · Material	Form · Shape	Form · Shape	Ausführung · Versions	Schaft · Shank
NC/ = Hartmetall TC <i>Tungsten carbide</i> NS = Rostfreier Stahl <i>Stainless steel</i> ND = Diamant <i>Diamond</i> D = Diamant grob <i>Diamond coarse</i>	01 = Rund · Round 03 = Zylinder <i>Cylinder</i> 04 = Zylinder rund <i>Cylinder round</i> 04 = Matchhead 06 = Konisch <i>Tapered</i> 07 = Konisch rund <i>Tapered round</i> 08 = Konisch spitz <i>Tapered pointed</i> 09 = Ei · Egg 10 = Acorn 11 = Flamme · Flame 12 = Birne · Pear 16 = Swanson 17 = Wire Pass Drill	18 = Lindemann 19 = Diamant zylind. <i>Diamond cylind.</i> 20 = Diamant konisch <i>Diamond tapered</i> 21 = Cranio 22 = Knospe rund <i>Bud round</i> 23 = Router 24 = Walze · Barrel 26 = Diamantscheibe <i>Diamond disc</i> 27 = Spiralbohrer <i>Twist Drill</i> 28 = Spiralbohrer <i>kanüliert</i> <i>Twist Drill</i> <i>cannulated</i> 35 - = Fußfräser 41 <i>Foot cutter</i>	Beispiele · Examples 01 = Ø 1,0 mm 6 Schneiden <i>6 flutes</i> 02 = Ø 1,4 mm 6 Schneiden <i>6 flutes</i> 07 = Ø 7,5 mm 8 Schneiden <i>8 flutes</i> 08 = Ø 9,0 mm 6 Schneiden <i>6 flutes</i> 88 = Ø 4,0 mm mit Querhieb <i>with cross-cut</i>	001 = L 37,0 mm 002 = L 44,5 mm 003 = L 48,0 mm 004 = L 51,0 mm 006 = L 57,0 mm 007 = L 62,0 mm 008 = L 67,0 mm 009 = L 70,0 mm 010 = L 73,0 mm 011 = L 80,0 mm 012 = L 95,0 mm 026 = L 125,0 mm 027 = L 65,0 mm 036 = L 75,0 mm 039 = L 44,5 mm 014 = L 44,5 mm 015 = L 48,0 mm 016 = L 55,0 mm 017 = L 62,0 mm 018 = L 65,0 mm 019 = L 67,0 mm 022 = L 75,0 mm 023 = L 70,0 mm 029 = L 44,5 mm 098 = AO 501/502 = Jakobs <i>Jacobs</i> 555 = ▲ 526 = I 525 = II 527 = III 511 = ▲ 512 = I 513 = II 514 = III 515 = O 516 = M 517 = AM

kompatibel für folgende Handstücke · compatible for the following handpieces

(1) Aesculap

Hilan-XS 525 – 555:

GB751R, GB756R, GB752R,
GB757R, GB753R, GB758R,
GB771R, GB741R/GB746R,
GB742R/GB747R,
GB743R/GB748R

Hilan 511 – 514:

GB529R, GB519R, GB530R,
GB533R, GB531R, GB534R,
GB532R, GB535R, GB536R,
GB537R, GB538R

(2) Stryker

515 – 517:

5100-10-20/5100-10-50/
5100-10-70
5100-10-22/5100-10-52/
5100-10-72

Hall Ultra Power

7020-011, 7020-012,
7020-013



Schaftarten

Shank types

Komet Medical Instrumente lassen sich durch die bewährte Laserkodierung eindeutig und schnell dem Handstück zuordnen.

Due to their approved laser marking, Komet Medical instruments can be quickly and easily allocated to the corresponding handpiece.

Aesculap Hilan/2:

GB519R/GB529R → Schaftart/shank type .511

GB533R/GB530R → Schaftart/shank type .512

GB534R/GB531R → Schaftart/shank type .513

GB535R/GB532R → Schaftart/shank type .514

Aesculap Hilan XS:

GB751R/GB756R → Schaftart/shank type .526

GB752R/GB757R → Schaftart/shank type .525

GB753R/GB758R → Schaftart/shank type .527



Stryker TPS/Core

Hall Ultra Power:

O → Schaftart/shank type .515

M → Schaftart/shank type .516














AM → Schaftart/shank type .517



Rostfreier Stahl · Rund

Stainless steel · Round



	NS01...	Ø (mm)	# S/FL		(L = mm) 57	(L = mm) 70	(L = mm) 95	(L = mm) 125	(L = mm) 55	
					Round Shank				J-Notch	
		0,6	6					NS0148.026 STE		
		0,6	6					NS0148.026		
		0,6	10			NS0157.009 STE				
		0,6	10			NS0157.009				
		0,7	6			NS01100.009 STE				
		0,7	6			NS01100.009				
		0,8	6			NS0149.009 STE		NS0149.026 STE		
		0,8	6			NS0149.009		NS0149.026		
		1,0	6		NS0101.006 STE	NS0101.009 STE	NS0101.012 STE	NS0101.026 STE		
		1,0	6		NS0101.006	NS0101.009	NS0101.012	NS0101.026		
		1,0	12			NS0111.009 STE				
		1,0	12			NS0111.009				
		1,4	8		NS0150.006 STE	NS0150.009 STE	NS0150.012 STE	NS0150.026 STE		
		1,4	8		NS0150.006	NS0150.009	NS0150.012	NS0150.026		
		1,6	6						NS0103.016 STE	
		1,6	6						NS0103.016	
		1,8	8		NS0151.006 STE	NS0151.009 STE	NS0151.012 STE	NS0151.026 STE		
		1,8	8		NS0151.006	NS0151.009	NS0151.012	NS0151.026		
		2,3	8		NS0115.006 STE	NS0115.009 STE	NS0115.012 STE	NS0115.026 STE	NS0115.016 STE	
		2,3	8		NS0115.006	NS0115.009	NS0115.012	NS0115.026	NS0115.016	
		2,7	10		NS0152.006 STE	NS0152.009 STE	NS0152.012 STE	NS0152.026 STE		
		2,7	10		NS0152.006	NS0152.009	NS0152.012	NS0152.026		
		3,1	6			NS0107.009 STE			NS0107.016 STE	
		3,1	6			NS0107.009			NS0107.016	
		3,1	10		NS0153.006 STE	NS0153.009 STE	NS0153.012 STE	NS0153.026 STE		
		3,1	10		NS0153.006	NS0153.009	NS0153.012	NS0153.026		
		3,5	6			NS0191.009 STE		NS0191.026 STE		
		3,5	6			NS0191.009		NS0191.026		
		3,5	12			NS0154.009 STE	NS0154.012 STE	NS0154.026 STE		
		3,5	12			NS0154.009	NS0154.012	NS0154.026		
		4,0	12		NS0120.006 STE	NS0120.009 STE	NS0120.012 STE	NS0120.026 STE	NS0120.016 STE	
		4,0	12		NS0120.006	NS0120.009	NS0120.012	NS0120.026	NS0120.016	
		4,5	6		NS0121.006 STE	NS0121.009 STE		NS0121.026 STE	NS0121.016 STE	
		4,5	6		NS0121.006	NS0121.009		NS0121.026	NS0121.016	
		4,5	12			NS0123.009 STE	NS0123.012 STE	NS0123.026 STE		
		4,5	12			NS0123.009	NS0123.012	NS0123.026		
		5,0	8			NS0109.009 STE		NS0109.026 STE	NS0109.016 STE	
		5,0	8			NS0109.009		NS0109.026	NS0109.016	
		5,0	12		NS0155.006 STE	NS0155.009 STE	NS0155.012 STE	NS0155.026 STE		
		5,0	12		NS0155.006	NS0155.009	NS0155.012	NS0155.026		
		6,0	14		NS0156.006 STE	NS0156.009 STE	NS0156.012 STE	NS0156.026 STE	NS0156.016 STE	
		6,0	14		NS0156.006	NS0156.009	NS0156.012	NS0156.026	NS0156.016	
		7,0	16			NS0125.009 STE	NS0125.012 STE	NS0125.026 STE	NS0125.016 STE	
		7,0	16			NS0125.009	NS0125.012	NS0125.026	NS0125.016	

**Rostfreier Stahl · Rund · High Speed · Aesculap Hilan XS**

Stainless steel · Round · High Speed · Aesculap Hilan XS






NS01...	Ø (mm)	# S/FL	(L = mm) 76 - 80	(L = mm) 106 - 110	(L = mm) 136 - 140			
Aesculap Hilan XS								
Handstück / handpiece			I	II	III			
	1,0	6	NS0101.526 STE	NS0101.525 STE				
	1,0	6	NS0101.526	NS0101.525				
	1,4	8	NS0150.526 STE	NS0150.525 STE				
	1,4	8	NS0150.526	NS0150.525				
	1,8	8	NS0151.526 STE	NS0151.525 STE	NS0151.527 STE			
	1,8	8	NS0151.526	NS0151.525	NS0151.527			
	2,3	8	NS0115.526 STE	NS0115.525 STE	NS0115.527 STE			
	2,3	8	NS0115.526	NS0115.525	NS0115.527			
	2,7	10	NS0152.526 STE	NS0152.525 STE	NS0152.527 STE			
	2,7	10	NS0152.526	NS0152.525	NS0152.527			
	3,1	10	NS0153.526 STE	NS0153.525 STE	NS0153.527 STE			
	3,1	10	NS0153.526	NS0153.525	NS0153.527			
	4,0	12	NS0120.526 STE	NS0120.525 STE	NS0120.527 STE			
	4,0	12	NS0120.526	NS0120.525	NS0120.527			
	5,0	12	NS0155.526 STE	NS0155.525 STE	NS0155.527 STE			
	5,0	12	NS0155.526	NS0155.525	NS0155.527			
	6,0	14	NS0156.526 STE	NS0156.525 STE	NS0156.527 STE			
	6,0	14	NS0156.526	NS0156.525	NS0156.527			



Rostfreier Stahl · Rund · High Speed · Aesculap Hilan Stainless steel · Round · High Speed · Aesculap Hilan



										
NS01...	Ø (mm)	# S/FL		(L = mm) 70	(L = mm) 90	(L = mm) 110	(L = mm) 152			
Aesculap Hilan										
Handstück / handpiece			▲	I	II	III				
	1,0	6			NS0140.512 STE	NS0140.513 STE				
	1,0	6			NS0140.512	NS0140.513				
	1,4	6		NS0141.511 STE	NS0141.512 STE	NS0141.513 STE				
	1,4	6		NS0141.511	NS0141.512	NS0141.513				
	2,4	8		NS0147.511 STE	NS0147.512 STE	NS0147.513 STE	NS0147.514 STE			
	2,4	8		NS0147.511	NS0147.512	NS0147.513	NS0147.514			
	3,2	10		NS0134.511 STE	NS0134.512 STE	NS0134.513 STE	NS0134.514 STE			
	3,2	10		NS0134.511	NS0134.512	NS0134.513	NS0134.514			
	4,8	10		NS0136.511 STE	NS0136.512 STE	NS0136.513 STE	NS0136.514 STE			
	4,8	10		NS0136.511	NS0136.512	NS0136.513	NS0136.514			
	6,4	14		NS0135.511 STE	NS0135.512 STE	NS0135.513 STE	NS0135.514 STE			
	6,4	14		NS0135.511	NS0135.512	NS0135.513	NS0135.514			
	7,9	16		NS0137.511 STE	NS0137.512 STE	NS0137.513 STE	NS0137.514 STE			
	7,9	16		NS0137.511	NS0137.512	NS0137.513	NS0137.514			



Komet Medical Instrumente lassen sich durch die bewährte Laserkodierung eindeutig und schnell dem Handstück zuordnen.





Aesculap® Hilan®

Due to their approved laser marking, Komet Medical instruments can be quickly and easily allocated to the corresponding handpiece.



Rostfreier Stahl · Rund · High Speed · Stryker TPS/Core · Hall Ultra Power
 Stainless steel · Round · High Speed · Stryker TPS/Core · Hall Ultra Power



											
NS01...	Ø (mm)	# S/FL		(L = mm) 64 - 71	(L = mm) 81 - 88	(L = mm) 134 - 141					
Stryker TPS/Core, Hall Ultra Power											
Handstück / handpiece			O	M	AM						
	1,0	6	NS0140.515 STE	NS0140.516 STE	NS0140.517 STE						
	1,0	6	NS0140.515	NS0140.516	NS0140.517						
	1,4	6	NS0141.515 STE	NS0141.516 STE	NS0141.517 STE						
	1,4	6	NS0141.515	NS0141.516	NS0141.517						
	2,4	8	NS0147.515 STE	NS0147.516 STE	NS0147.517 STE						
	2,4	8	NS0147.515	NS0147.516	NS0147.517						
	3,2	10	NS0134.515 STE	NS0134.516 STE	NS0134.517 STE						
	3,2	10	NS0134.515	NS0134.516	NS0134.517						
	4,0	8	NS0108.515 STE	NS0108.516 STE	NS0108.517 STE						
	4,0	8	NS0108.515	NS0108.516	NS0108.517						
	4,8	10	NS0136.515 STE	NS0136.516 STE	NS0136.517 STE						
	4,8	10	NS0136.515	NS0136.516	NS0136.517						
	5,4	12		NS0178.516 STE	NS0178.517 STE						
	5,4	12		NS0178.516	NS0178.517						
	6,4	14	NS0135.515 STE	NS0135.516 STE	NS0135.517 STE						
	6,4	14	NS0135.515	NS0135.516	NS0135.517						
	7,0	8		NS0126.516 STE	NS0126.517 STE						
	7,0	8		NS0126.516	NS0126.517						
	7,9	16	NS0137.515 STE	NS0137.516 STE	NS0137.517 STE						
	7,9	16	NS0137.515	NS0137.516	NS0137.517						



Komet Medical Instrumente
 lassen sich durch die bewährte
 Laserkodierung eindeutig und
 schnell dem Handstück zuordnen.

Stryker TPS/Core

*Due to their approved laser marking,
 Komet Medical instruments can
 be quickly and easily allocated to
 the corresponding handpiece.*



Rostfreier Stahl · Zylinder mit Querhieb

Stainless steel · Cylinder with cross-cut



NS04...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 70	(L = mm) 125				
Round Shank									
	5,0	12	10,0	NS0409.009 STE	NS0409.026 STE				
	5,0	12	10,0	NS0409.009	NS0409.026				
	6,0	14	11,0	NS0410.009 STE					
	6,0	14	11,0	NS0410.009					
	7,0	16	12,0	NS0412.009 STE	NS0412.026 STE				
	7,0	16	12,0	NS0412.009	NS0412.026				
	8,0	16	13,0	NS0414.009 STE					
	8,0	16	13,0	NS0414.009					

Rostfreier Stahl · Ei

Stainless steel · Egg



NS09...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 55					
J-Notch									
	4,0	10	9,5	NS0903.016 STE					
	4,0	10	9,5	NS0903.016					
	6,0	14	9,5	NS0909.016 STE					
	6,0	14	9,5	NS0909.016					

**Rostfreier Stahl · Ei mit Querhieb**

Stainless steel · Egg with cross-cut



NS09...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 70					
Round Shank									
	4,0	10	9,5	NS0904.009 STE					
	4,0	10	9,5	NS0904.009					
	5,0	12	10,0	NS0913.009 STE					
	5,0	12	10,0	NS0913.009					
	6,0	14	11,0	NS0915.009 STE					
	6,0	14	11,0	NS0915.009					
	7,0	16	12,0	NS0917.009 STE					
	7,0	16	12,0	NS0917.009					

Rostfreier Stahl · Birne

Stainless steel · Pear



NS12...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 44,5	(L = mm) 55				
J-Notch									
	6,0	14	10,0	NS1201.014 STE	NS1201.016 STE				
	6,0	14	10,0	NS1201.014	NS1201.016				

Rostfreier Stahl · Knospe mit Querhieb

Stainless steel · Bud with cross-cut



NS22...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 70	(L = mm) 95				
Round Shank									
	4,0	10	8,0	NS2202.009 STE	NS2202.012 STE				
	4,0	10	8,0	NS2202.009	NS2202.012				
	5,0	12	9,5	NS2204.009 STE					
	5,0	12	9,5	NS2204.009					
	6,0	14	11,0	NS2206.009 STE					
	6,0	14	11,0	NS2206.009					
	8,0	16	14,0	NS2210.009 STE					
	8,0	16	14,0	NS2210.009					



Rostfreier Stahl · Knospe

Stainless steel · Bud



Rostfreier Stahl · Stainless steel

NS22...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 70	(L = mm) 125	(L = mm) 44,5			
				Round Shank		Dental			
	4,0	10	8,0	NS2201.009 STE					
	4,0	10	8,0	NS2201.009					
	5,0	12	9,5	NS2203.009 STE	NS2203.026 STE	NS2203.029 STE			
	5,0	12	9,5	NS2203.009	NS2203.026	NS2203.029			
	6,0	14	11,0	NS2205.009 STE		NS2205.029 STE			
	6,0	14	11,0	NS2205.009		NS2205.029			
	7,0	16	12,5	NS2207.009 STE	NS2207.026 STE				
	7,0	16	12,5	NS2207.009	NS2207.026				
	8,0	16	14,0	NS2209.009 STE					
	8,0	16	14,0	NS2209.009					

Rostfreier Stahl · Swanson


Stainless steel · Swanson



NS16...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 57	(L = mm) 62				
				Round Shank					
	2,0	5	7,0	NS1601.006 STE					
	2,0	5	7,0	NS1601.006					
	3,0	5	9,5		NS1602.007 STE				
	3,0	5	9,5		NS1602.007				
	4,0	6	12,5		NS1605.007 STE				
	4,0	6	12,5		NS1605.007				
	5,0	7	13,5		NS1604.007 STE				
	5,0	7	13,5		NS1604.007				



Rostfreier Stahl · Walze · High Speed · Aesculap Hilan
Stainless steel · Barrel · High Speed · Aesculap Hilan



NS24...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 110					
				Aesculap Hilan					
Handstück / handpiece				II					
	6,0	8	9,0	NS2414.513 STE					
	6,0	8	9,0	NS2414.513					

Rostfreier Stahl · Craniotome · Low Speed
Stainless steel · Craniotome · Low Speed



NS21...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 44,5					
Handstück / handpiece				Aesculap GB265R					
	2,9	3	26,0	NS2107.25A STE					
	2,9	3	26,0	NS2107.25A					

Rostfreier Stahl · Craniotome · Low Speed

Stainless steel · Craniotome · Low Speed



NS21...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 44,5					
Handstück / handpiece					Aesculap GB265R/Codman 26-1246				
	2,5	4	21,5	NS2101.025 STE					
	2,5	4	21,5	NS2101.025					

Rostfreier Stahl · Router Cranio · High Speed · Aesculap Hilan

Stainless steel · Router Cranio · High Speed · Aesculap Hilan



NS23...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 80 - 87	(L = mm) 100 - 107				
					Aesculap Hilan				
Handstück / handpiece					▲ I				
	1,6	2	18,0	NS2311.511 STE	NS2311.512 STE				
	1,6	2	18,0	NS2311.511	NS2311.512				

**Rostfreier Stahl · Craniotome · High Speed · Aesculap Hilan**

Stainless steel · Craniotome · High Speed · Aesculap Hilan




										
NS21...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 63	(L = mm) 67	(L = mm) 77				
Aesculap Hilan										
	Handstück / handpiece			I	II	III				
	1,6	3	13,0	NS2117.512 STE						
	1,6	3	13,0	NS2117.512						
	1,6	3	16,5		NS2118.513 STE					
	1,6	3	16,5		NS2118.513					
	1,6	3	25,0			NS2119.514 STE				
	1,6	3	25,0			NS2119.514				

Rostfreier Stahl · Craniotome · High Speed · Aesculap Hilan XS

Stainless steel · Craniotome · High Speed · Aesculap Hilan XS



										
NS21...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 46,4	(L = mm) 51,4	(L = mm) 56,4				
Aesculap Hilan XS										
Handstück / handpiece				I	II	III				
	1,2	3	11,0	NS2120.526 STE						
	1,2	3	11,0	NS2120.526						
	1,4	3	16,0		NS2121.525 STE					
	1,4	3	16,0		NS2121.525					
	1,4	3	20,6			NS2122.527 STE				
	1,4	3	20,6			NS2122.527				



Rostfreier Stahl · Wire Pass Drill

Stainless steel · Wire Pass Drill



Rostfreier Stahl · Stainless steel

NS17...				(L = mm) 51		(L = mm) 65	(L = mm) 95	(L = mm) 55	(L = mm) 65	
				Round Shank				J-Notch		
	1,0	2	10,0	NS1701.004 STE	NS1701.027 STE				NS1701.018 STE	
	1,0	2	10,0	NS1701.004	NS1701.027				NS1701.018	
	1,2	2	10,0			NS1702.012 STE	NS1702.016 STE			
	1,2	2	10,0			NS1702.012	NS1702.016			
	1,5	2	6,6	NS1703.004 STE	NS1703.027 STE				NS1703.018 STE	
	1,5	2	6,6	NS1703.004	NS1703.027				NS1703.018	
	2,0	2	6,6	NS1704.004 STE						
	2,0	2	6,6	NS1704.004						

**Rostfreier Stahl · Spiralbohrer · High Speed · Aesculap Hilan**

Stainless steel · Twist drills · High Speed · Aesculap Hilan



	NS27...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 83-86	(L = mm) 103-106	(L = mm) 123-126			
	Aesculap Hilan									
	Handstück / handpiece ▲									
		1,5	2	18,0	NS2701.511 STE	NS2701.512 STE	NS2701.513 STE			
		1,5	2	18,0	NS2701.511	NS2701.512	NS2701.513			
		2,0	2	20,0	NS2702.511 STE	NS2702.512 STE	NS2702.513 STE			
		2,0	2	20,0	NS2702.511	NS2702.512	NS2702.513			

Rostfreier Stahl · Spiralbohrer · High Speed · Aesculap Hilan XS

Stainless steel · Twist drills · High Speed · Aesculap Hilan XS















	NS27...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 51,80	(L = mm) 92,7	(L = mm) 122,7			
	Aesculap Hilan XS									
	Handstück / handpiece ▲									
		1,5	2	20,0	NS2766.555 STE	NS2766.526 STE	NS2766.525 STE			
		1,5	2	20,0	NS2766.555	NS2766.526	NS2766.525			
		2,0	2	20,0		NS2789.526 STE				
		2,0	2	20,0		NS2789.526				



Hartmetall · Rund

Tungsten carbide · Round



									
NC01...	Ø (mm)	# S/FL		(L = mm) 44,5	(L = mm) 51	(L = mm) 70	(L = mm) 95	(L = mm) 125	(L = mm) 44,5
				Round Shank					J-Notch
	0,5	6				NC0192.009 STE	NC0192.012 STE		
	0,5	6				NC0192.009	NC0192.012		
	0,8	6				NC0149.009 STE	NC0149.012 STE		
	0,8	6				NC0149.009	NC0149.012		
	1,0	6		NC0101.002 STE	NC0101.004 STE	NC0101.009 STE	NC0101.012 STE		
	1,0	6		NC0101.002	NC0101.004	NC0101.009	NC0101.012		
	1,2	6				NC0193.009 STE	NC0193.012 STE		
	1,2	6				NC0193.009	NC0193.012		
	1,4	6		NC0102.002 STE		NC0102.009 STE			
	1,4	6		NC0102.002		NC0102.009			
	1,6	6			NC0103.004 STE	NC0103.009 STE	NC0103.012 STE		NC0103.014 STE
	1,6	6			NC0103.004	NC0103.009	NC0103.012		NC0103.014
	1,8	6		NC0104.002 STE	NC0104.004 STE	NC0104.009 STE	NC0104.012 STE		NC0104.014 STE
	1,8	6		NC0104.002	NC0104.004	NC0104.009	NC0104.012		NC0104.014
	2,1	6			NC0105.004 STE	NC0105.009 STE	NC0105.012 STE		NC0105.014 STE
	2,1	6			NC0105.004	NC0105.009	NC0105.012		NC0105.014
	2,3	6			NC0106.004 STE	NC0106.009 STE	NC0106.012 STE	NC0106.026 STE	NC0106.014 STE
	2,3	6			NC0106.004	NC0106.009	NC0106.012	NC0106.026	NC0106.014
	2,7	8		NC0128.002 STE		NC0128.009 STE			
	2,7	8		NC0128.002		NC0128.009			
	3,1	6			NC0107.004 STE		NC0107.012 STE		NC0107.014 STE
	3,1	6			NC0107.004		NC0107.012		NC0107.014
	3,1	8		NC0117.002 STE		NC0117.009 STE		NC0117.026 STE	
	3,1	8		NC0117.002		NC0117.009		NC0117.026	
	3,5	8		NC0194.002 STE		NC0194.009 STE	NC0194.012 STE		
	3,5	8		NC0194.002		NC0194.009	NC0194.012		
	4,0	8			NC0108.004 STE	NC0108.009 STE	NC0108.012 STE		NC0108.014 STE
	4,0	8			NC0108.004	NC0108.009	NC0108.012		NC0108.014
	4,0	10		NC0195.002 STE		NC0195.009 STE	NC0195.012 STE	NC0195.026 STE	
	4,0	10		NC0195.002		NC0195.009	NC0195.012	NC0195.026	
	4,5	10		NC0196.002 STE		NC0196.009 STE	NC0196.012 STE		
	4,5	10		NC0196.002		NC0196.009	NC0196.012		
	5,0	8			NC0109.004 STE	NC0109.009 STE	NC0109.012 STE		NC0109.014 STE
	5,0	8			NC0109.004	NC0109.009	NC0109.012		NC0109.014
	5,0	12		NC0155.002 STE		NC0155.009 STE	NC0155.012 STE	NC0155.026 STE	
	5,0	12		NC0155.002		NC0155.009	NC0155.012	NC0155.026	
	6,0	8			NC0110.004 STE	NC0110.009 STE			NC0110.014 STE
	6,0	8			NC0110.004	NC0110.009			NC0110.014
	6,0	14				NC0156.009 STE	NC0156.012 STE	NC0156.026 STE	
	6,0	14				NC0156.009	NC0156.012	NC0156.026	
	6,5	8			NC0170.004 STE	NC0170.009 STE	NC0170.012 STE		
	6,5	8			NC0170.004	NC0170.009	NC0170.012		
	7,0	16		NC0125.002 STE		NC0125.009 STE	NC0125.012 STE	NC0125.026 STE	
	7,0	16		NC0125.002		NC0125.009	NC0125.012	NC0125.026	



Hartmetall · Rund · Omni-E

Tungsten carbide · Round · Omni-E



NC01...	Ø (mm)	# S/FL		(L = mm) 51	(L = mm) 70	(L = mm) 95	(L = mm) 55		
				Round Shank			J-Notch		
	1,4	10			NC0185.009 STE				
	1,4	10			NC0185.009				
	2,3	12		NC0186.004 STE	NC0186.009 STE		NC0186.016 STE		
	2,3	12		NC0186.004	NC0186.009		NC0186.016		
	3,1	12			NC0187.009 STE	NC0187.012 STE			
	3,1	12			NC0187.009	NC0187.012			
	4,0	14		NC0188.004 STE	NC0188.009 STE				
	4,0	14		NC0188.004	NC0188.009				
	5,0	14		NC0189.004 STE	NC0189.009 STE				
	5,0	14		NC0189.004	NC0189.009				
	6,0	16		NC0190.004 STE	NC0190.009 STE	NC0190.012 STE			
	6,0	16		NC0190.004	NC0190.009	NC0190.012			

Hartmetall · Zylinder mit Querhieb

Tungsten carbide · Cylinder with cross-cut



NC03...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 44,5	(L = mm) 51	(L = mm) 70	(L = mm) 73		
				Round Shank					
	1,0	6	6,0	NC0302.002 STE	NC0302.004 STE				
	1,0	6	6,0	NC0302.002	NC0302.004				
	1,2	8	4,2	NC0321.002 STE		NC0321.009 STE			
	1,2	8	4,2	NC0321.002		NC0321.009			
	1,4	6	4,4	NC0318.002 STE					
	1,4	6	4,4	NC0318.002					
	1,5	6	7,5		NC0306.004 STE		NC0306.010 STE		
	1,5	6	7,5		NC0306.004		NC0306.010		
	1,6	6	4,4	NC0308.002 STE		NC0308.009 STE			
	1,6	6	4,4	NC0308.002		NC0308.009			
	1,8	6	4,6	NC0319.002 STE		NC0319.009 STE			
	1,8	6	4,6	NC0319.002		NC0319.009			
	2,1	8	10,0		NC0310.004 STE		NC0310.010 STE		
	2,1	8	10,0		NC0310.004		NC0310.010		



Hartmetall · Zylinder

Tungsten carbide · Cylinder



	NC03...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 44,5	(L = mm) 51				
					Round Shank					
		1,6	6	4,4	NC0307.002 STE	NC0307.004 STE				
		1,6	6	4,4	NC0307.002	NC0307.004				

Hartmetall · Zylinder rund mit Querhieb

Tungsten carbide · Cylinder round with cross-cut






	NC04...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 44,5					
					J-Notch					
		1,6	6	6,0	NC0405.014 STE					
		1,6	6	6,0	NC0405.014					

Hartmetall · Konisch

Tungsten carbide · Tapered




	NC06...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 51	(L = mm) 70	(L = mm) 73	(L = mm) 80		
					Round Shank					
		1,6	6	4,4	NC0607.004 STE					
		1,6	6	4,4	NC0607.004					
		1,6	6	10,0	NC0609.004 STE					
		1,6	6	10,0	NC0609.004					
		1,8	6	12,0		NC0613.009 STE				
		1,8	6	12,0		NC0613.009				
		2,0	6	18,0				NC0619.011 STE		
		2,0	6	18,0				NC0619.011		
		2,1	6	4,8	NC0615.004 STE					
		2,1	6	4,8	NC0615.004					
		2,1	6	7,5	NC0617.004 STE		NC0617.010 STE			
		2,1	6	7,5	NC0617.004		NC0617.010			



Hartmetall · Konisch mit Querhieb

Tungsten carbide · Tapered with cross-cut



	NC06...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 44,5	(L = mm) 51	(L = mm) 65	(L = mm) 70	(L = mm) 44,5	
					Round Shank				J-Notch	
		1,2	6	4,2	NC0606.002 STE	NC0606.004 STE	NC0606.027 STE	NC0606.009 STE	NC0606.014 STE	
		1,2	6	4,2	NC0606.002	NC0606.004	NC0606.027	NC0606.009	NC0606.014	
		1,6	6	4,4	NC0608.002 STE	NC0608.004 STE	NC0608.027 STE	NC0608.009 STE	NC0608.014 STE	
		1,6	6	4,4	NC0608.002	NC0608.004	NC0608.027	NC0608.009	NC0608.014	
		1,8	6	4,6		NC0612.004 STE				
		1,8	6	4,6		NC0612.004				
		2,1	6	4,8	NC0616.002 STE	NC0616.004 STE	NC0616.027 STE		NC0616.014 STE	
		2,1	6	4,8	NC0616.002	NC0616.004	NC0616.027		NC0616.014	
		2,1	6	7,5	NC0618.002 STE					
		2,1	6	7,5	NC0618.002					

Hartmetall · Knospe

Tungsten carbide · Bud



	NC22...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 44,5 - 51,5					
					Round Shank					
		4,0	12	13,0	NC2215.039 STE					
		4,0	12	13,0	NC2215.039					
		4,0	16	8,0	NC2219.039 STE					
		4,0	16	8,0	NC2219.039					
		5,0	16	13,0	NC2216.039 STE					
		5,0	16	13,0	NC2216.039					
		6,0	20	11,0	NC2220.039 STE					
		6,0	20	11,0	NC2220.039					



Hartmetall · Ei

Tungsten carbide · Egg



	NC09...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 48	(L = mm) 70	(L = mm) 95	(L = mm) 44,5	(L = mm) 55	
					Round Shank			J-Notch		
		4,0	8	8,0	NC0901.003 STE	NC0901.009 STE	NC0901.012 STE	NC0901.014 STE	NC0901.016 STE	
		4,0	8	8,0	NC0901.003	NC0901.009	NC0901.012	NC0901.014	NC0901.016	
		5,5	10	10,0	NC0905.003 STE	NC0905.009 STE	NC0905.012 STE			
		5,5	10	10,0	NC0905.003	NC0905.009	NC0905.012			

Smooth Line Carbide · Rund

Smooth Line Carbide · Round



	TC1SL...	Ø (mm)	# S/FL		(L = mm) 70					
					Round Shank					
		3,0	8		TC1SL030.009 STE					
		3,0	8		TC1SL030.009					
		4,0	10		TC1SL040.009 STE					
		4,0	10		TC1SL040.009					
		5,0	12		TC1SL050.009 STE					
		5,0	12		TC1SL050.009					
		6,0	12		TC1SL060.009 STE					
		6,0	12		TC1SL060.009					

Smooth Line Carbide · Ei

Smooth Line Carbide · Egg



	TC9SL...	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 75	(L = mm) 95				
					ConMed Hall/Round Shank					
		4,0	8	8,0	TC9SL040.073 STE	TC9SL040.065 STE				
		4,0	8	8,0	TC9SL040.073	TC9SL040.065				
		5,5	10	10,0	TC9SL055.073 STE	TC9SL055.065 STE				
		5,5	10	10,0	TC9SL055.073	TC9SL055.065				



Diamant · Rund · Medium

Diamond · Round · Medium



ND01...		Ø (mm)		(L = mm) 57	(L = mm) 70*	(L = mm) 95	(L = mm) 125	(L = mm) 55	
				Round Shank				J-Notch	
	0,6				ND0142.009 STE	ND0142.012 STE	ND0142.026 STE		
	0,6				ND0142.009	ND0142.012	ND0142.026		
	0,7				ND0188.009 STE				
	0,7				ND0188.009				
	0,8				ND0143.009 STE	ND0143.012 STE	ND0143.026 STE		
	0,8				ND0143.009	ND0143.012	ND0143.026		
	1,0			ND0128.006 STE	ND0128.009 STE	ND0128.012 STE	ND0128.026 STE	ND0128.016 STE	
	1,0			ND0128.006	ND0128.009	ND0128.012	ND0128.026	ND0128.016	
	1,2				ND0144.009 STE	ND0144.012 STE			
	1,2				ND0144.009	ND0144.012			
	1,4			ND0145.006 STE	ND0145.009 STE	ND0145.012 STE	ND0145.026 STE		
	1,4			ND0145.006	ND0145.009	ND0145.012	ND0145.026		
	1,6				ND0129.009 STE	ND0129.012 STE		ND0129.016 STE	
	1,6				ND0129.009	ND0129.012		ND0129.016	
	1,8			ND0146.006 STE	ND0146.009 STE	ND0146.012 STE	ND0146.026 STE		
	1,8			ND0146.006	ND0146.009	ND0146.012	ND0146.026		
	2,1				ND0139.009 STE	ND0139.012 STE	ND0139.026 STE		
	2,1				ND0139.009	ND0139.012	ND0139.026		
	2,1							ND0130.016 STE	
	2,1							ND0130.016	
	2,3			ND0140.006 STE	ND0140.009 STE	ND0140.012 STE	ND0140.026 STE		
	2,3			ND0140.006	ND0140.009	ND0140.012	ND0140.026		
	2,3							ND0131.016 STE	
	2,3							ND0131.016	
	2,5				ND0189.009 STE	ND0189.012 STE	ND0189.026 STE		
	2,5				ND0189.009	ND0189.012	ND0189.026		
	2,7			ND0190.006 STE	ND0190.009 STE	ND0190.012 STE	ND0190.026 STE		
	2,7			ND0190.006	ND0190.009	ND0190.012	ND0190.026		
	2,9				ND0132.009 STE	ND0132.012 STE		ND0132.016 STE	
	2,9				ND0132.009	ND0132.012		ND0132.016	
	3,1			ND0133.006 STE	ND0133.009 STE	ND0133.012 STE	ND0133.026 STE		
	3,1			ND0133.006	ND0133.009	ND0133.012	ND0133.026		
	3,5			ND0134.006 STE	ND0134.009 STE	ND0134.012 STE	ND0134.026 STE		
	3,5			ND0134.006	ND0134.009	ND0134.012	ND0134.026		
	4,0			ND0135.006 STE	ND0135.009 STE	ND0135.012 STE	ND0135.026 STE	ND0135.016 STE	
	4,0			ND0135.006	ND0135.009	ND0135.012	ND0135.026	ND0135.016	
	4,5			ND0136.006 STE	ND0136.009 STE	ND0136.012 STE	ND0136.026 STE	ND0136.016 STE	
	4,5			ND0136.006	ND0136.009	ND0136.012	ND0136.026	ND0136.016	
	5,0			ND0141.006 STE	ND0141.009 STE	ND0141.012 STE	ND0141.026 STE		
	5,0			ND0141.006	ND0141.009	ND0141.012	ND0141.026		
	5,0							ND0137.016 STE	
	5,0							ND0137.016	
	6,0			ND0138.006 STE	ND0138.009 STE	ND0138.012 STE	ND0138.026 STE		
	6,0			ND0138.006	ND0138.009	ND0138.012	ND0138.026		


* = schlank zulaufender Hals / slim tapering neck



Diamant · Rund · Medium

Diamond · Round · Medium







									
ND01...	Ø (mm)			(L = mm) 57	(L = mm) 70	(L = mm) 95	(L = mm) 125		
Round Shank									
	7,0			ND0147.006 STE	ND0147.009 STE	ND0147.012 STE	ND0147.026 STE		
	7,0			ND0147.006	ND0147.009	ND0147.012	ND0147.026		

Diamant · Rund · High Speed · Aesculap Hilan XS

Diamond · Round · High Speed · Aesculap Hilan XS



									
ND01...	Ø (mm)			(L = mm) 76 - 80	(L = mm) 106 - 110	(L = mm) 136 - 140			
Aesculap Hilan XS									
Handstück / handpiece									
				I	II	III			
	1,0			ND0128.526 STE	ND0128.525 STE				
	1,0			ND0128.526	ND0128.525				
	1,4			ND0145.526 STE	ND0145.525 STE				
	1,4			ND0145.526	ND0145.525				
	1,8			ND0146.526 STE	ND0146.525 STE	ND0146.527 STE			
	1,8			ND0146.526	ND0146.525	ND0146.527			
	2,3			ND0140.526 STE	ND0140.525 STE	ND0140.527 STE			
	2,3			ND0140.526	ND0140.525	ND0140.527			
	2,7			ND0190.526 STE	ND0190.525 STE	ND0190.527 STE			
	2,7			ND0190.526	ND0190.525	ND0190.527			
	3,1			ND0133.526 STE	ND0133.525 STE	ND0133.527 STE			
	3,1			ND0133.526	ND0133.525	ND0133.527			
	4,0			ND0135.526 STE	ND0135.525 STE	ND0135.527 STE			
	4,0			ND0135.526	ND0135.525	ND0135.527			
	5,0			ND0141.526 STE	ND0141.525 STE	ND0141.527 STE			
	5,0			ND0141.526	ND0141.525	ND0141.527			
	6,0			ND0138.526 STE	ND0138.525 STE	ND0138.527 STE			
	6,0			ND0138.526	ND0138.525	ND0138.527			



Diamant · Rund · High Speed · Aesculap Hilan

Diamond · Round · High Speed · Aesculap Hilan



ND01...		Ø (mm)		(L = mm) 70	(L = mm) 90	(L = mm) 110	(L = mm) 152		
Aesculap Hilan									
Handstück / handpiece				▲	I	II	III		
	1,0			ND0160.511 STE	ND0160.512 STE	ND0160.513 STE			
	1,0			ND0160.511	ND0160.512	ND0160.513			
	1,5			ND0161.511 STE	ND0161.512 STE	ND0161.513 STE			
	1,5			ND0161.511	ND0161.512	ND0161.513			
	2,1			ND0162.511 STE	ND0162.512 STE	ND0162.513 STE	ND0162.514 STE		
	2,1			ND0162.511	ND0162.512	ND0162.513	ND0162.514		
	3,3			ND0163.511 STE	ND0163.512 STE	ND0163.513 STE	ND0163.514 STE		
	3,3			ND0163.511	ND0163.512	ND0163.513	ND0163.514		
	3,8				ND0123.512 STE	ND0123.513 STE			
	3,8				ND0123.512	ND0123.513			
	4,6			ND0124.511 STE	ND0124.512 STE	ND0124.513 STE	ND0124.514 STE		
	4,6			ND0124.511	ND0124.512	ND0124.513	ND0124.514		
	6,0			ND0165.511 STE	ND0165.512 STE	ND0165.513 STE	ND0165.514 STE		
	6,0			ND0165.511	ND0165.512	ND0165.513	ND0165.514		



Diamant · Rund · High Speed · Stryker TPS/Core · Hall Ultra Power

Diamond · Round · High Speed · Stryker TPS/Core · Hall Ultra Power




ND01...	Ø (mm)		(L = mm) 64,5 – 68	(L = mm) 81,5 – 86	(L = mm) 134 – 139			
Stryker TPS/Core, Hall Ultra Power								
Handstück / handpiece		O	M	AM				
	1,0		ND0160.515 STE		ND0160.517 STE			
	1,0		ND0160.515		ND0160.517			
	1,5		ND0161.515 STE	ND0161.516 STE	ND0161.517 STE			
	1,5		ND0161.515	ND0161.516	ND0161.517			
	2,1		ND0162.515 STE	ND0162.516 STE	ND0162.517 STE			
	2,1		ND0162.515	ND0162.516	ND0162.517			
	2,7		ND0120.515 STE	ND0120.516 STE	ND0120.517 STE			
	2,7		ND0120.515	ND0120.516	ND0120.517			
	3,3		ND0163.515 STE	ND0163.516 STE	ND0163.517 STE			
	3,3		ND0163.515	ND0163.516	ND0163.517			
	3,8			ND0123.516 STE				
	3,8			ND0123.516				
	4,2		ND0164.515 STE	ND0164.516 STE	ND0164.517 STE			
	4,2		ND0164.515	ND0164.516	ND0164.517			
	4,6			ND0124.516 STE				
	4,6			ND0124.516				
	5,0		ND0166.515 STE	ND0166.516 STE	ND0166.517 STE			
	5,0		ND0166.515	ND0166.516	ND0166.517			
	6,0			ND0165.516 STE	ND0165.517 STE			
	6,0			ND0165.516	ND0165.517			



Diamant · Rund · Grob Diamond · Round · Coarse



										
D01...	Ø (mm)			(L = mm) 57	(L = mm) 70	(L = mm) 95	(L = mm) 125			
Round Shank										
	2,3			D01100.006 STE	D01100.009 STE	D01100.012 STE	D01100.026 STE			
	2,3			D01100.006	D01100.009	D01100.012	D01100.026			
	2,7			D01101.006 STE	D01101.009 STE	D01101.012 STE	D01101.026 STE			
	2,7			D01101.006	D01101.009	D01101.012	D01101.026			
	3,1			D01102.006 STE	D01102.009 STE	D01102.012 STE	D01102.026 STE			
	3,1			D01102.006	D01102.009	D01102.012	D01102.026			
	3,5			D01103.006 STE	D01103.009 STE	D01103.012 STE	D01103.026 STE			
	3,5			D01103.006	D01103.009	D01103.012	D01103.026			
	4,0			D01104.006 STE	D01104.009 STE	D01104.012 STE	D01104.026 STE			
	4,0			D01104.006	D01104.009	D01104.012	D01104.026			
	4,5			D01105.006 STE	D01105.009 STE	D01105.012 STE	D01105.026 STE			
	4,5			D01105.006	D01105.009	D01105.012	D01105.026			
	5,0			D01106.006 STE	D01106.009 STE	D01106.012 STE	D01106.026 STE			
	5,0			D01106.006	D01106.009	D01106.012	D01106.026			
	6,0			D01107.006 STE	D01107.009 STE	D01107.012 STE	D01107.026 STE			
	6,0			D01107.006	D01107.009	D01107.012	D01107.026			
	7,0			D01108.006 STE	D01108.009 STE	D01108.012 STE				
	7,0			D01108.006	D01108.009	D01108.012				

Diamant · Rund · Grob · High Speed · Aesculap Hilan XS Diamond · Round · Coarse · High Speed · Aesculap Hilan XS



									
D01...	Ø (mm)			(L = mm) 76 - 80	(L = mm) 106 - 110	(L = mm) 136 - 140			
Aesculap Hilan XS									
Handstück / handpiece									
			I	II		III			
	4,0			D01104.526 STE	D01104.525 STE	D01104.527 STE			
	4,0			D01104.526	D01104.525	D01104.527			
	6,0			D01107.526 STE	D01107.525 STE	D01107.527 STE			
	6,0			D01107.526	D01107.525	D01107.527			



Diamant · Rund · Grob · High Speed · Aesculap Hilan

Diamond · Round · Coarse · High Speed · Aesculap Hilan



D01...	Ø (mm)		(L = mm) 90					
Aesculap Hilan								
Handstück / handpiece I								
	4,0		D01104.512 STE					
	4,0		D01104.512					
	6,0		D01107.512 STE					
	6,0		D01107.512					

Diamant · Rund · Extragrob

Diamond · Round · Extra coarse





DM/DS01...	Ø (mm)		(L = mm) 95	(L = mm) 125				
Round Shank								
	3,0		DM01102.012 STE					
	3,0		DM01102.012					
	4,0		DS01104.012 STE	DS01104.026 STE				
	4,0		DS01104.012	DS01104.026				




Diamant · Rund · Megagrob
Diamond · Round · Mega coarse



									
DX01...	Ø (mm)			(L = mm) 70					
Round Shank									
	4,0			DX01104.009 STE					
	4,0			DX01104.009					
	5,0			DX01106.009 STE					
	5,0			DX01106.009					


Diamant · Walze · Medium
Diamond · Barrel · Medium



									
ND19...	Ø (mm)	KL/HL (mm)		(L = mm) 51					
Round Shank									
	12,0	15,5		ND1903.004 STE					
	12,0	15,5		ND1903.004					

Diamant · Walze · Medium
Diamond · Barrel · Medium



									
ND19...	Ø (mm)	KL/HL (mm)		(L = mm) 73					
Round Shank									
	9,0	11,0		ND1905.009 STE					
	9,0	11,0		ND1905.009					



Diamant · Zylinder · Medium

Diamond · Cylinder · Medium



	ND04...	Ø (mm)	KL/HL (mm)		(L = mm) 70					
	Round Shank									
		0,6	2,0		ND0445.009 STE					
		0,6	2,0		ND0445.009					

Diamant · Trennscheibe · High Speed · Aesculap Hilan

Diamond · Separating disc · High Speed · Aesculap Hilan



	ND26...	Ø (mm)	KL/HL (mm)		(L = mm) 94	(L = mm) 113				
	Aesculap Hilan									
	Handstück / handpiece									
					I	II				
		25,5	1,1		ND2602.512	ND2602.513				

**Rostfreier Stahl · Lindemann**

Stainless steel · Lindemann



NS1801	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	Anschluss/Connection
NS1801.016 STE	2,3	4	9,5	55	J-Notch
NS1801.016	2,3	4	9,5	55	J-Notch



NS1802	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	Anschluss/Connection
NS1802.008 STE	2,3	4	25,0	67	Round Shank Ø 2,35 mm
NS1802.008	2,3	4	25,0	67	Round Shank Ø 2,35 mm
NS1802.019 STE	2,3	4	25,0	67	J-Notch
NS1802.019	2,3	4	25,0	67	J-Notch



NS1805	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	Anschluss/Connection
NS1805.016 STE	1,6	4	9,0	55	J-Notch
NS1805.016	1,6	4	9,0	55	J-Notch



NS1806	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	Anschluss/Connection
NS1806.002 STE	2,1	4	10,0	44,5	Round Shank Ø 2,35 mm
NS1806.002	2,1	4	10,0	44,5	Round Shank Ø 2,35 mm



NS1808	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	Anschluss/Connection
NS1808.036 STE	2,3	4	35,0	75	Round Shank Ø 2,35 mm
NS1808.036	2,3	4	35,0	75	Round Shank Ø 2,35 mm
NS1808.022 STE	2,3	4	35,0	75	J-Notch
NS1808.022	2,3	4	35,0	75	J-Notch



NS1809	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	Anschluss/Connection
NS1809.007 STE	2,3	4	22,0	62	Round Shank Ø 2,35 mm
NS1809.007	2,3	4	22,0	62	Round Shank Ø 2,35 mm
NS1809.027 STE	2,3	4	22,0	65	Round Shank Ø 2,35 mm
NS1809.027	2,3	4	22,0	65	Round Shank Ø 2,35 mm
NS1809.009 STE	2,3	4	22,0	70	Round Shank Ø 2,35 mm
NS1809.009	2,3	4	22,0	70	Round Shank Ø 2,35 mm
NS1809.023 STE	2,3	4	22,0	70	J-Notch
NS1809.023	2,3	4	22,0	70	J-Notch



Rostfreier Stahl · Lindemann

Stainless steel · Lindemann



NS1812	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	Anschluss/Connection
NS1812.002 STE	1,4	4	5,0	44,5	Round Shank Ø 2,35 mm
NS1812.002	1,4	4	5,0	44,5	Round Shank Ø 2,35 mm
NS1812.009 STE	1,4	4	5,0	70	Round Shank Ø 2,35 mm
NS1812.009	1,4	4	5,0	70	Round Shank Ø 2,35 mm

Hartmetall · Lindemann

Tungsten carbide · Lindemann



NC1803	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	Anschluss/Connection
NC1803.004 STE	1,9	4	13,0	51	Round Shank Ø 2,35 mm
NC1803.004	1,9	4	13,0	51	Round Shank Ø 2,35 mm



NC1805	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	Anschluss/Connection
NC1805.027 STE	1,6	4	9,0	65	Round Shank Ø 2,35 mm
NC1805.027	1,6	4	9,0	65	Round Shank Ø 2,35 mm
NC1805.009 STE	1,6	4	9,0	70	Round Shank Ø 2,35 mm
NC1805.009	1,6	4	9,0	70	Round Shank Ø 2,35 mm



NC1806	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	Anschluss/Connection
NC1806.027 STE	2,1	4	10,0	65	Round Shank Ø 2,35 mm
NC1806.027	2,1	4	10,0	65	Round Shank Ø 2,35 mm
NC1806.009 STE	2,1	4	10,0	70	Round Shank Ø 2,35 mm
NC1806.009	2,1	4	10,0	70	Round Shank Ø 2,35 mm



NC1810	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	Anschluss/Connection
NC1810.027 STE	1,7	4	9,0	65	Round Shank Ø 2,35 mm
NC1810.027	1,7	4	9,0	65	Round Shank Ø 2,35 mm
NC1810.009 STE	1,7	4	9,0	70	Round Shank Ø 2,35 mm
NC1810.009	1,7	4	9,0	70	Round Shank Ø 2,35 mm



NC1811	Ø (mm)	S/FL #	KL/HL (mm)	Gesamtlänge/total length (mm)	Anschluss/Connection
NC1811.009 STE	2,1	4	10,0	70	Round Shank Ø 2,35 mm
NC1811.009	2,1	4	10,0	70	Round Shank Ø 2,35 mm




A series of horizontal dotted lines for writing, spanning the width of the page.



Fußfräser (MIS)

Cutters for Percutaneous foot surgery

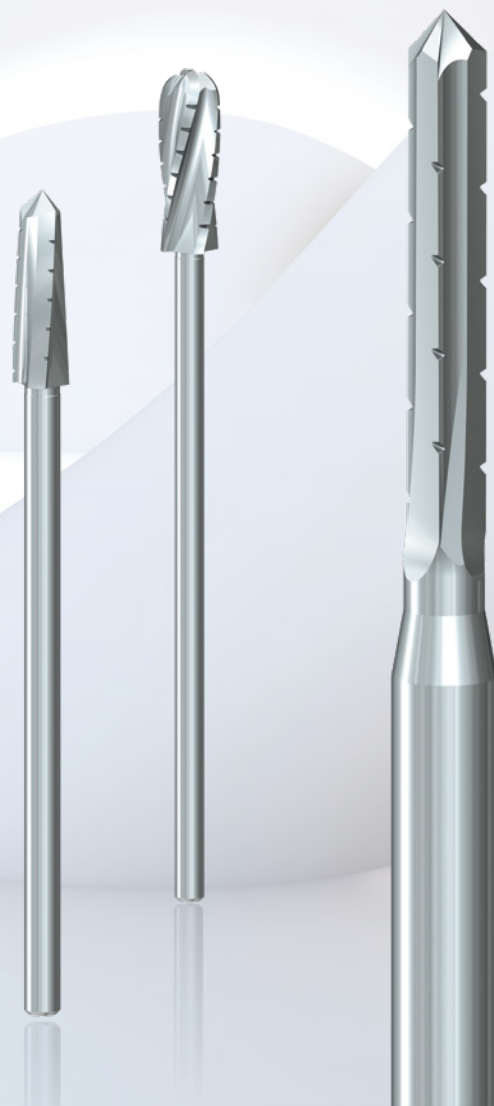

**Rostfreier Stahl · Fußfräser · Shannon Recta · gerade Verzahnung***Stainless steel · Foot cutter · Shannon Recta · straight toothing*

Single Use



Shannon Recta Corta	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 65
Round Shank				
	2,0	3	9,0	NS3706.027 STE



Shannon Recta	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 65
Round Shank				
	2,0	3	13,0	NS3701.027 STE



Shannon Recta Larga	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 75
Round Shank				
	2,2	3	20,0	NS3703.036 STE



Shannon Recta X-Larga	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 100
Round Shank				
	3,0	3	30,0	NS3705.036 STE



Shannon Recta 3	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 65
Round Shank				
	3,1	3	15,0	NS3804.027 STE



Shannon Recta 4	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 65
Round Shank				
	4,1	3	15,0	NS3805.027 STE



Shannon Recta 3 Larga	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 70
Round Shank				
	3,1	3	20,0	NS3803.009 STE

Rostfreier Stahl · Fußfräser · Shannon · gedrahte Verzahnung*Stainless steel · Foot cutter · Shannon · twisted toothing*

Single Use



Shannon Corta	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 55
Round Shank				
	2,0	3	8,0	NS3801.005 STE



Shannon Corta	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 65
Round Shank				
	2,0	3	8,0	NS3801.027 STE



Shannon Larga	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 65
Round Shank				
	2,2	3	12,0	NS3901.027 STE



Rostfreier Stahl · Fußfräser · Wedge · gedrahte Verzahnung

Stainless steel · Foot cutter · Wedge · twisted toothing



Single Use



Wedge 3	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 55
Round Shank				
	2,9	3	13,0	NS3501.005 STE



Wedge 4	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 55
Round Shank				
	4,3	3	13,0	NS3601.005 STE



Wedge 3	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 65
Round Shank				
	2,9	3	13,0	NS3501.027 STE



Wedge 4	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 65
Round Shank				
	4,3	3	13,0	NS3601.027 STE

Rostfreier Stahl · Fußfräser · Sonderformen

Stainless steel · Foot cutter · Special shapes



Single Use



Shannon 43	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 65
Round Shank				
	2,2	4	11,0	NS4001.027 STE



Brophy	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 70
Round Shank				
	5,0	4	15,0	NS4101.009 STE



Shannon 44	Ø (mm)	# S/FL	KL/HL (mm)	(L = mm) 65
Round Shank				
	2,2	3	11,0	NS4002.027 STE



Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page
D01100.006	160	D01107.006	160	EZ1310.M62 STE	69	EZ2214.M81 STE	25
D01100.006 STE	160	D01107.006 STE	160	EZ1310.M80 STE	18	EZ2215.M00 STE	34
D01100.009	160	D01107.009	160	EZ1310.M81 STE	25	EZ2215.M50 STE	98/110
D01100.009 STE	160	D01107.009 STE	160	EZ1312.M50 STE	98/110	EZ2215.M62 STE	70
D01100.012	160	D01107.012	160	EZ1312.M62 STE	69	EZ2215.M80 STE	18
D01100.012 STE	160	D01107.012 STE	160	EZ1313.M00 STE	34	EZ2215.M81 STE	25
D01100.026	160	D01107.026	160	EZ1313.M10 STE	54	EZ2510P.S62 STE	70
D01100.026 STE	160	D01107.026 STE	160	EZ1313.M30 STE	62	EZ2513P.L62 STE	70
D01101.006	160	D01107.512	161	EZ1313.M50 STE	98/110	EZ2513P.M62 STE	70
D01101.006 STE	160	D01107.512 STE	161	EZ1313.M62 STE	69	GP001.089.032	122
D01101.009	160	D01107.525	160	EZ1313.M80 STE	18	GP001.089.032 STE	122
D01101.009 STE	160	D01107.525 STE	160	EZ1313.M81 STE	25	GP001A.076.031	122
D01101.012	160	D01107.526	160	EZ1314.M00 STE	34	GP001A.076.031 STE	122
D01101.012 STE	160	D01107.526 STE	160	EZ1314.M10 STE	54	GP001A.089.032	122
D01101.026	160	D01107.527	160	EZ1314.M30 STE	62	GP001A.089.032 STE	122
D01101.026 STE	160	D01107.527 STE	160	EZ1314.M50 STE	98/110	GP002A.089.032	122
D01102.006	160	D01108.006	160	EZ1314.M62 STE	69	GP002A.089.032 STE	122
D01102.006 STE	160	D01108.006 STE	160	EZ1314.M80 STE	18	GP003A.019.030	122
D01102.009	160	D01108.009	160	EZ1314.M81 STE	25	GP003A.019.030 STE	122
D01102.009 STE	160	D01108.009 STE	160	EZ1912.M00 STE	34	GP003A.027.030	122
D01102.012	160	D01108.012	160	EZ1912.M50 STE	98/110	GP003A.027.030 STE	122
D01102.012 STE	160	D01108.012 STE	160	EZ1912.M62 STE	69	GP003A.035.030	122
D01102.026	160	DM01102.012	161	EZ1912.M81 STE	25	GP003A.035.030 STE	122
D01102.026 STE	160	DM01102.012 STE	161	EZ1913.L62.T70 STE	69	GP003A.038.030	122
D01103.006	160	DS01104.012	161	EZ1913.M00 STE	34	GP003A.038.030 STE	122
D01103.006 STE	160	DS01104.012 STE	161	EZ1913.M10 STE	54	GP003B.076.032	123
D01103.009	160	DS01104.026	161	EZ1913.M30 STE	62	GP003B.076.032 STE	123
D01103.009 STE	160	DS01104.026 STE	161	EZ1913.M50 STE	98/110	GP003B.127.032	123
D01103.012	160	DX01104.009	162	EZ1913.M62 STE	69	GP003B.127.032 STE	123
D01103.012 STE	160	DX01104.009 STE	162	EZ1913.M80 STE	18	GP005.076.032	123
D01103.026	160	DX01106.009	162	EZ1913.M81 STE	25	GP005.076.032 STE	123
D01103.026 STE	160	DX01106.009 STE	162	EZ1914.M00 STE	34	GP007.075.032	123
D01104.006	160	EVO1310.08R	39	EZ1914.M10 STE	54	GP007.075.032 STE	123
D01104.006 STE	160	EVO1310.18R	57	EZ1914.M30 STE	62	GS900.055.010	128
D01104.009	160	EVO1310.58R	102/114	EZ1914.M50 STE	98/110	GS900.055.020	128
D01104.009 STE	160	EVO1310.88R	21	EZ1914.M62 STE	69	GS900.100.000	128
D01104.012	160	EVO1312.59J	102/114	EZ1914.M80 STE	18	GS900.100.010	128
D01104.012 STE	160	EVO1312.M62	76	EZ1914.M81 STE	25	GS900.130.000	128
D01104.026	160	EVO1313.07S	39	EZ2210.M00 STE	34	GS900A.040.000	128
D01104.026 STE	160	EVO1313.17S	57	EZ2210.M10 STE	54	GS901.033.032	124
D01104.512	161	EVO1313.57S	102/114	EZ2210.M30 STE	62	GS901.033.032 STE	124
D01104.512 STE	161	EVO1313.807	21	EZ2210.M50 STE	98/110	GS901.050.032	124
D01104.525	160	EVO1313.M62	76	EZ2210.M62 STE	70	GS901.050.032 STE	124
D01104.525 STE	160	EVO1909.02R	39	EZ2210.M80 STE	18	GS901A.050.032	124
D01104.526	160	EVO1909.52R	102/114	EZ2210.M81 STE	25	GS901A.050.032 STE	124
D01104.526 STE	160	EVO1913.01S	39	EZ2212.M00 STE	34	GS902.150.032	126
D01104.527	160	EVO1913.51S	102/114	EZ2212.M50 STE	98/110	GS902.150.032 STE	126
D01104.527 STE	160	EVO1913.81S	21	EZ2212.M62 STE	70	GS903.062.032	124
D01105.006	160	EVO1913.M62	76	EZ2212.M80 STE	18	GS903.062.032 STE	124
D01105.006 STE	160	EVO1914.01T	39	EZ2212.M81 STE	25	GS903A.062.032	125
D01105.009	160	EVO1914.51T	102/114	EZ2212F.M63 STE	69	GS903A.062.032 STE	125
D01105.009 STE	160	EVO2510.06B	39	EZ2213.M00 STE	34	GS904.100.030	126
D01105.012	160	EVO2510.16B	57	EZ2213.M10 STE	54	GS904.100.030 STE	126
D01105.012 STE	160	EVO2510.56B	102/114	EZ2213.M30 STE	62	GS904.100.040	126
D01105.026	160	EVO2512.15J	57	EZ2213.M50 STE	98/110	GS904.100.040 STE	126
D01105.026 STE	160	EVO2513.05S	39	EZ2213.M62 STE	70	GS904.150.030	126
D01106.006	160	EVO2513.15S	57	EZ2213.M80 STE	18	GS904.150.030 STE	126
D01106.006 STE	160	EVO2513.55S	102/114	EZ2213.M81 STE	25	GS905.030.032	124
D01106.009	160	EVO2513.812	21	EZ2213F.M63 STE	69	GS905.030.032 STE	124
D01106.009 STE	160	EVO2513.M62	76	EZ2214.M00 STE	34	GS905.050.032	124
D01106.012	160	EZ1310.M00 STE	34	EZ2214.M10 STE	54	GS905.050.032 STE	124
D01106.012 STE	160	EZ1310.M10 STE	54	EZ2214.M50 STE	98/110	GS907.067.032	125
D01106.026	160	EZ1310.M30 STE	62	EZ2214.M62 STE	70	GS907.067.032 STE	125
D01106.026 STE	160	EZ1310.M50 STE	98/110	EZ2214.M80 STE	18	GS907A.076.032	125

Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page
GS907A.076.032 STE	125	KM3.106 STE	88	KM33.125	91	KM5140.107	94
GS908.056.032	125	KM3.108	88	KM33.125 STE	91	KM5140.107 STE	94
GS908.056.032 STE	125	KM3.108 STE	88	KM33.206	91	KM5140.123	94
GS909.027.032	125	KM3.110	88	KM33.206 STE	91	KM5140.123 STE	94
GS909.027.032 STE	125	KM3.110 STE	88	KM33.212	91	KM5140.133	94
GS910.080.040	127	KM3.111	88	KM33.212 STE	91	KM5140.133 STE	94
GS910.080.040 STE	127	KM3.111 STE	88	KM33.225	91	KM5140.190	95
GS910.110.032	126	KM3.114	89	KM33.225 STE	91	KM5140.190 STE	95
GS910.110.032 STE	126	KM3.114 STE	89	KM33.410	92	KM5140.233	95
GS910.110.040	127	KM3.115	89	KM33.410 STE	92	KM5140.233 STE	95
GS910.110.040 STE	127	KM3.115 STE	89	KM33.412	92	KM5140.615	95
GS910.140.032	126	KM3.124	89	KM33.412 STE	92	KM5140.615 STE	95
GS910.140.032 STE	126	KM3.124 STE	89	KM33.414	92	KM5160.011	95
GS910.140.040	127	KM3.125	89	KM33.414 STE	92	KM5160.011 STE	95
GS910.140.040 STE	127	KM3.125 STE	89	KM33.521	92	KM5160.012	96
GS910.170.040	127	KM3.212	89	KM33.521 STE	92	KM5160.012 STE	96
GS910.170.040 STE	127	KM3.212 STE	89	KM34	50	KM5160.123	96
KM005	47	KM3.215	89	KM34 STE	50	KM5160.123 STE	96
KM005 STE	47	KM3.215 STE	89	KM37113.ST	97	KM5160.233	96
KM060	50	KM3.225	89	KM37113.ST STE	97	KM5160.233 STE	96
KM060 STE	50	KM3.225 STE	89	KM37114.ST	97	KM519.010	103/115
KM101	47	KM3.254	89	KM37114.ST STE	97	KM519.010 STE	103/115
KM101 STE	47	KM3.254 STE	89	KM37115.ST	97	KM519.012	103/115
KM102	47	KM3.410	90	KM37115.ST STE	97	KM519.012 STE	103/115
KM102 STE	47	KM3.410 STE	90	KM37116.ST	97	KM519.013	103/115
KM106	47	KM3.411	90	KM37116.ST STE	97	KM519.013 STE	103/115
KM106 STE	47	KM3.411 STE	90	KM458 STE	51/59/66	KM519.015	104/116
KM107	47	KM3.412	90	KM458.SY STE	109	KM519.015 STE	104/116
KM107 STE	47	KM3.412 STE	90	KM459 STE	51/59/66	KM519.017	104/116
KM135	24	KM3.413	90	KM460.ZI STE	119	KM519.017 STE	104/116
KM135 STE	24	KM3.413 STE	90	KM461 STE	52/60/67	KM519.018	104/116
KM156208.SY	103/115	KM3.414	90	KM462.ZI STE	119	KM519.018 STE	104/116
KM156208.SY STE	103/115	KM3.414 STE	90	KM463.AC STE	32	KM519.019	105/117
KM250R STE	85	KM3.511	90	KM473 STE	52/60/67	KM519.019 STE	105/117
KM251R.AC STE	32	KM3.511 STE	90	KM473A STE	52/60/67	KM519.023	105/117
KM252R STE	85	KM3.525	90	KM475.LI STE	52/60/67	KM519.023 STE	105/117
KM252R.LI STE	51/59/66	KM3.525 STE	90	KM476 STE	53/61/68	KM519.025	105/117
KM257008.SY	104/116	KM3002	46/64	KM476.AC STE	33	KM519.025 STE	105/117
KM257008.SY STE	104/116	KM3002 STE	46/64	KM476A STE	53/61/68	KM51910.C81	28
KM275R STE	86	KM3005	46/64	KM476A.AC STE	33	KM51910.C81 STE	28
KM275R.ZI STE	118	KM3005 STE	46/64	KM486208.S63	77	KM51910.DS	58
KM275RA STE	86	KM3006	46/64	KM486208.S63 STE	77	KM51910.DS STE	58
KM275RA.ZI STE	118	KM3006 STE	46/64	KM486209.M63	78	KM51915.C62	79
KM276RA STE	86	KM3101	48/64	KM486209.M63 STE	78	KM51915.C62 STE	79
KM277R STE	86	KM3101 STE	48/64	KM486209.S62	77	KM51915.C80	22
KM277R.ZI STE	118	KM32	50	KM486209.S62 STE	77	KM51915.C80 STE	22
KM277RA STE	87	KM32 STE	50	KM486210.S63	78	KM51915.C81	28
KM277RA.SY STE	108	KM325R STE	87	KM486210.S63 STE	78	KM51915.C81 STE	28
KM277RA.ZI STE	118	KM325R.LI STE	51/59/66	KM48K	47	KM51915.DS	58
KM278R.SY STE	108	KM326R STE	87	KM48K STE	47	KM51915.DS STE	58
KM278RA.SY STE	108	KM327R STE	87	KM5023.124	48/64	KM51917.DS	58
KM28093.AC	22	KM327R.AC STE	32	KM5023.124 STE	48/64	KM51917.DS STE	58
KM28093.AC STE	22	KM328R.AC STE	32	KM51215.C81	28	KM51917.S62	79
KM280R.ZI STE	119	KM329R.SY STE	109	KM51215.C81 STE	28	KM51917.S62 STE	79
KM281R.ZI STE	119	KM33.103	90	KM5140.010	93	KM51917.S81	28
KM3.102	88	KM33.103 STE	90	KM5140.010 STE	93	KM51917.S81 STE	28
KM3.102 STE	88	KM33.105	91	KM5140.011	93	KM51920.C81	29
KM3.103	88	KM33.105 STE	91	KM5140.011 STE	93	KM51920.C81 STE	29
KM3.103 STE	88	KM33.111	91	KM5140.012	93	KM51925.C00	40
KM3.104	88	KM33.111 STE	91	KM5140.012 STE	93	KM51925.C00 STE	40
KM3.104 STE	88	KM33.114	91	KM5140.020	93	KM51925.C30	64
KM3.105	88	KM33.114 STE	91	KM5140.020 STE	93	KM51925.C30 STE	64
KM3.105 STE	88	KM33.115	91	KM5140.106	94	KM51925.C62	79
KM3.106	88	KM33.115 STE	91	KM5140.106 STE	94	KM51925.C62 STE	79



Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page
KM51925.C80	22	KM71125.C62	82	KMS1312.M81 STE	26	KMS2213.07F STE	36
KM51925.C80 STE	22	KM71125.C62 STE	82	KMS1312.S50 STE	99/111	KMS2213.17F STE	55
KM51925.C81	29	KM71125.C81	29	KMS1312.S62 STE	72	KMS2213.57F STE	100/112
KM51925.C81 STE	29	KM71125.C81 STE	29	KMS1313.07S STE	35	KMS2213.87F STE	19
KM51925.DS	58	KM71276.C00	44	KMS1313.17S STE	55	KMS2213.M30 STE	63
KM51925.DS STE	58	KM71276.C00 STE	44	KMS1313.57S STE	99/111	KMS2213.M62 STE	74
KM532.044	106	KM71276.C62	82	KMS1313.807 STE	19	KMS2213.M81 STE	27
KM532.044 STE	106	KM71276.C62 STE	82	KMS1313.C62 STE	72	KMS2213F.M00 STE	36
KM532.050	106	KM71276.C81	30	KMS1313.M30 STE	63	KMS2213F.M50 STE	100/112
KM532.050 STE	106	KM71276.C81 STE	30	KMS1313.M62 STE	72	KMS2213F.M62 STE	74
KM54	50	KM71277.C00	44	KMS1313.M81 STE	26	KMS2213F.M81 STE	27
KM54 STE	50	KM71277.C00 STE	44	KMS1313.S62 STE	72	KMS2295F.M00 STE	36
KM600.S63	79	KM71277.C62	83	KMS1313F.S63 STE	72	KMS2295F.M62 STE	74
KM600.S63 STE	79	KM71277.C62 STE	83	KMS1395.M00 STE	35	KMS2509.06R STE	37
KM6023.140	48/65	KM71277.C81	30	KMS1395.M62 STE	72	KMS2509.55R STE	101/113
KM6023.140 STE	48/65	KM71277.C81 STE	30	KMS1713.L00 STE	35	KMS2509.M62 STE	75
KM609.M62	80	KM71278.C00	45	KMS1713.L50 STE	99/111	KMS2510.06B STE	37
KM609.M62 STE	80	KM71278.C00 STE	45	KMS1713.L62 STE	73	KMS2510.16B STE	55
KM615.S63	80	KM71278.C62	83	KMS1713.L80 STE	19	KMS2510.56B STE	101/113
KM615.S63 STE	80	KM71278.C62 STE	83	KMS1714.L00 STE	35	KMS2510.811 STE	20
KM615R	24	KM71278.C81	31	KMS1714.L50 STE	99/111	KMS2510.M62 STE	75
KM615R STE	24	KM71278.C81 STE	31	KMS1714.L62 STE	73	KMS2510.M81 STE	27
KM620.S63	80	KM71452.S50	105/117	KMS1909.02R STE	36	KMS2510.S62 STE	74
KM620.S63 STE	80	KM71452.S50 STE	105/117	KMS1909.52R STE	100/112	KMS2510.S81 STE	27
KM640.S63	80	KM71456.S62	84	KMS1909.M30 STE	63	KMS2512.05J STE	37
KM640.S63 STE	80	KM71456.S62 STE	84	KMS1909.M62 STE	73	KMS2512.15J STE	55
KM644.C62	81	KM71459.S63	84	KMS1909.M81 STE	26	KMS2512.55J STE	101/113
KM644.C62 STE	81	KM71459.S63 STE	84	KMS1910.M62 STE	73	KMS2512.85J STE	20
KM645.C62	81	KM8526.AC	22	KMS1910.M81 STE	26	KMS2512.M62 STE	75
KM645.C62 STE	81	KM8526.AC STE	22	KMS1910.S62 STE	73	KMS2512.M81 STE	27
KM648.C62	81	KM8624.AC	33	KMS1910.S81 STE	26	KMS2512P.M50 STE	101/113
KM648.C62 STE	81	KM8624.AC STE	33	KMS1912.L00 STE	36	KMS2512P.M62 STE	75
KM650.S63	81	KM8672.AC	23	KMS1912.L10 STE	55	KMS2513.05S STE	37
KM650.S63 STE	81	KM8672.AC STE	23	KMS1912.L50 STE	100/112	KMS2513.15S STE	55
KM660.S62	82	KM8673.AC	23	KMS1912.L62 STE	73	KMS2513.35S STE	63
KM660.S62 STE	82	KM8673.AC STE	23	KMS1912.L81 STE	26	KMS2513.55S STE	101/113
KM71.132	40	KM8674.AC	23	KMS1912.M00 STE	36	KMS2513.812 STE	20
KM71.132 STE	40	KM8674.AC STE	23	KMS1912.M30 STE	63	KMS2513.L62 STE	75
KM71.133	40	KM97	85	KMS1913.01S STE	36	KMS2513.M62 STE	75
KM71.133 STE	40	KM97 STE	85	KMS1913.31S STE	63	KMS2513.M81 STE	27
KM71.134	40	KM97A	85	KMS1913.51S STE	100/112	KMS2513P.L10 STE	56
KM71.134 STE	40	KM97A STE	85	KMS1913.81S STE	19	KMS2513P.M00 STE	37
KM71.451	41	KMS0001.SY STE	99/111	KMS1913.L00 STE	36	KMS2513P.M62 STE	75
KM71.451 STE	41	KMS0004.SY STE	101/113	KMS1913.L50 STE	100/112	KMS2514.05T STE	37
KM71.452	41	KMS0812.S63 STE	71	KMS1913.L62 STE	73	KMS2514.15T STE	55
KM71.452 STE	41	KMS0813.C62 STE	71	KMS1913.L62.T70 STE	74	KMS2514.55T STE	101/113
KM71.453	41	KMS1012.P00 STE	35	KMS1913.M62 STE	73	KMS2514.85T STE	20
KM71.453 STE	41	KMS1012.P63 STE	71	KMS1913.M81 STE	26	KMS2514.L00 STE	37
KM71.455	41	KMS1013.M00 STE	35	KMS1913.S62 STE	73	KMS2514.L62 STE	75
KM71.455 STE	41	KMS1013.M63 STE	71	KMS1914.01T STE	36	KMS2514.L80 STE	20
KM71.456	42	KMS1309.M62 STE	72	KMS1914.51T STE	100/112	KMS2514.M30 STE	63
KM71.456 STE	42	KMS1309.M81 STE	26	KMS1914.M30 STE	63	KMS2514.M62 STE	75
KM71.457	42	KMS1310.08R STE	35	KMS1914.M62 STE	73	KMS2514.M81 STE	27
KM71.457 STE	42	KMS1310.18R STE	55	KMS1995.L00 STE	36	KMS2514P.L00 STE	38
KM71.458	42	KMS1310.58R STE	99/111	KMS1995.L62 STE	73	KMS2515.05I STE	37
KM71.458 STE	42	KMS1310.88R STE	19	KMS2210.06F STE	36	KMS2515.15I STE	55
KM71.472	42	KMS1310.M30 STE	63	KMS2210.16F STE	55	KMS2515.35I STE	63
KM71.472 STE	42	KMS1310.M62 STE	72	KMS2210.56F STE	100/112	KMS2515.55I STE	101/113
KM71.510	43	KMS1310.M81 STE	26	KMS2210.86F STE	19	KMS2515.813 STE	20
KM71.510 STE	43	KMS1312.09J STE	35	KMS2210.M30 STE	63	KMS2515.M62 STE	75
KM71.515	43	KMS1312.59J STE	99/111	KMS2210.M62 STE	74	KMS2515.M81 STE	27
KM71.515 STE	43	KMS1312.89J STE	19	KMS2210.M81 STE	27	KMS2595.M00 STE	37
KM71.125.C00	43	KMS1312.M10 STE	55	KMS2212F.M50 STE	100/112	KMS2595.M62 STE	75
KM71.125.C00 STE	43	KMS1312.M62 STE	72	KMS2212F.M62 STE	74	NC0101.002	151



Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page
NC0101.002 STE	151	NC0109.009 STE	151	NC0187.012 STE	152	NC0318.002 STE	152
NC0101.004	151	NC0109.012	151	NC0188.004	152	NC0319.002	152
NC0101.004 STE	151	NC0109.012 STE	151	NC0188.004 STE	152	NC0319.002 STE	152
NC0101.009	151	NC0109.014	151	NC0188.009	152	NC0319.009	152
NC0101.009 STE	151	NC0109.014 STE	151	NC0188.009 STE	152	NC0319.009 STE	152
NC0101.012	151	NC0110.004	151	NC0189.004	152	NC0321.002	152
NC0101.012 STE	151	NC0110.004 STE	151	NC0189.004 STE	152	NC0321.002 STE	152
NC0102.002	151	NC0110.009	151	NC0189.009	152	NC0321.009	152
NC0102.002 STE	151	NC0110.009 STE	151	NC0189.009 STE	152	NC0321.009 STE	152
NC0102.009	151	NC0110.014	151	NC0190.004	152	NC0405.014	153
NC0102.009 STE	151	NC0110.014 STE	151	NC0190.004 STE	152	NC0405.014 STE	153
NC0103.004	151	NC0117.002	151	NC0190.009	152	NC0606.002	154
NC0103.004 STE	151	NC0117.002 STE	151	NC0190.009 STE	152	NC0606.002 STE	154
NC0103.009	151	NC0117.009	151	NC0190.012	152	NC0606.004	154
NC0103.009 STE	151	NC0117.009 STE	151	NC0190.012 STE	152	NC0606.004 STE	154
NC0103.012	151	NC0117.026	151	NC0192.009	151	NC0606.009	154
NC0103.012 STE	151	NC0117.026 STE	151	NC0192.009 STE	151	NC0606.009 STE	154
NC0103.014	151	NC0125.002	151	NC0192.012	151	NC0606.014	154
NC0103.014 STE	151	NC0125.002 STE	151	NC0192.012 STE	151	NC0606.014 STE	154
NC0104.002	151	NC0125.009	151	NC0193.009	151	NC0606.027	154
NC0104.002 STE	151	NC0125.009 STE	151	NC0193.009 STE	151	NC0606.027 STE	154
NC0104.004	151	NC0125.012	151	NC0193.012	151	NC0607.004	153
NC0104.004 STE	151	NC0125.012 STE	151	NC0193.012 STE	151	NC0607.004 STE	153
NC0104.009	151	NC0125.026	151	NC0194.002	151	NC0608.002	154
NC0104.009 STE	151	NC0125.026 STE	151	NC0194.002 STE	151	NC0608.002 STE	154
NC0104.012	151	NC0128.002	151	NC0194.009	151	NC0608.004	154
NC0104.012 STE	151	NC0128.002 STE	151	NC0194.009 STE	151	NC0608.004 STE	154
NC0104.014	151	NC0128.009	151	NC0194.012	151	NC0608.009	154
NC0104.014 STE	151	NC0128.009 STE	151	NC0194.012 STE	151	NC0608.009 STE	154
NC0105.004	151	NC0149.009	151	NC0195.002	151	NC0608.014	154
NC0105.004 STE	151	NC0149.009 STE	151	NC0195.002 STE	151	NC0608.014 STE	154
NC0105.009	151	NC0149.012	151	NC0195.009	151	NC0608.027	154
NC0105.009 STE	151	NC0149.012 STE	151	NC0195.009 STE	151	NC0608.027 STE	154
NC0105.012	151	NC0155.002	151	NC0195.012	151	NC0609.004	153
NC0105.012 STE	151	NC0155.002 STE	151	NC0195.012 STE	151	NC0609.004 STE	153
NC0105.014	151	NC0155.009	151	NC0195.026	151	NC0612.004	154
NC0105.014 STE	151	NC0155.009 STE	151	NC0195.026 STE	151	NC0612.004 STE	154
NC0106.004	151	NC0155.012	151	NC0196.002	151	NC0613.009	153
NC0106.004 STE	151	NC0155.012 STE	151	NC0196.002 STE	151	NC0613.009 STE	153
NC0106.009	151	NC0155.026	151	NC0196.009	151	NC0615.004	153
NC0106.009 STE	151	NC0155.026 STE	151	NC0196.009 STE	151	NC0615.004 STE	153
NC0106.012	151	NC0156.009	151	NC0196.012	151	NC0616.002	154
NC0106.012 STE	151	NC0156.009 STE	151	NC0196.012 STE	151	NC0616.002 STE	154
NC0106.014	151	NC0156.012	151	NC0302.002	152	NC0616.004	154
NC0106.014 STE	151	NC0156.012 STE	151	NC0302.002 STE	152	NC0616.004 STE	154
NC0106.026	151	NC0156.026	151	NC0302.004	152	NC0616.014	154
NC0106.026 STE	151	NC0156.026 STE	151	NC0302.004 STE	152	NC0616.014 STE	154
NC0107.004	151	NC0170.004	151	NC0306.004	152	NC0616.027	154
NC0107.004 STE	151	NC0170.004 STE	151	NC0306.004 STE	152	NC0616.027 STE	154
NC0107.012	151	NC0170.009	151	NC0306.010	152	NC0617.004	153
NC0107.012 STE	151	NC0170.009 STE	151	NC0306.010 STE	152	NC0617.004 STE	153
NC0107.014	151	NC0170.012	151	NC0307.002	153	NC0617.010	153
NC0107.014 STE	151	NC0170.012 STE	151	NC0307.002 STE	153	NC0617.010 STE	153
NC0108.004	151	NC0185.009	152	NC0307.004	153	NC0618.002	154
NC0108.004 STE	151	NC0185.009 STE	152	NC0307.004 STE	153	NC0618.002 STE	154
NC0108.009	151	NC0186.004	152	NC0308.002	152	NC0619.011	153
NC0108.009 STE	151	NC0186.004 STE	152	NC0308.002 STE	152	NC0619.011 STE	153
NC0108.012	151	NC0186.009	152	NC0308.009	152	NC0901.003	155
NC0108.012 STE	151	NC0186.009 STE	152	NC0308.009 STE	152	NC0901.003 STE	155
NC0108.014	151	NC0186.016	152	NC0310.004	152	NC0901.009	155
NC0108.014 STE	151	NC0186.016 STE	152	NC0310.004 STE	152	NC0901.009 STE	155
NC0109.004	151	NC0187.009	152	NC0310.010	152	NC0901.012	155
NC0109.004 STE	151	NC0187.009 STE	152	NC0310.010 STE	152	NC0901.012 STE	155
NC0109.009	151	NC0187.012	152	NC0318.002	152	NC0901.014	155



Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page
NC0901.014 STE	155	ND0128.026 STE	156	ND0136.012 STE	156	ND0143.012 STE	156
NC0901.016	155	ND0128.525	157	ND0136.016	156	ND0143.026	156
NC0901.016 STE	155	ND0128.525 STE	157	ND0136.016 STE	156	ND0143.026 STE	156
NC0905.003	155	ND0128.526	157	ND0136.026	156	ND0144.009	156
NC0905.003 STE	155	ND0128.526 STE	157	ND0136.026 STE	156	ND0144.009 STE	156
NC0905.009	155	ND0129.009	156	ND0137.016	156	ND0144.012	156
NC0905.009 STE	155	ND0129.009 STE	156	ND0137.016 STE	156	ND0144.012 STE	156
NC0905.012	155	ND0129.012	156	ND0138.006	156	ND0145.006	156
NC0905.012 STE	155	ND0129.012 STE	156	ND0138.006 STE	156	ND0145.006 STE	156
NC1803.004	165	ND0129.016	156	ND0138.009	156	ND0145.009	156
NC1803.004 STE	165	ND0129.016 STE	156	ND0138.009 STE	156	ND0145.009 STE	156
NC1805.009	165	ND0130.016	156	ND0138.012	156	ND0145.012	156
NC1805.009 STE	165	ND0130.016 STE	156	ND0138.012 STE	156	ND0145.012 STE	156
NC1805.027	165	ND0131.016	156	ND0138.026	156	ND0145.026	156
NC1805.027 STE	165	ND0131.016 STE	156	ND0138.026 STE	156	ND0145.026 STE	156
NC1806.009	165	ND0132.009	156	ND0138.525	157	ND0145.525	157
NC1806.009 STE	165	ND0132.009 STE	156	ND0138.525 STE	157	ND0145.525 STE	157
NC1806.027	165	ND0132.012	156	ND0138.526	157	ND0145.526	157
NC1806.027 STE	165	ND0132.012 STE	156	ND0138.526 STE	157	ND0145.526 STE	157
NC1810.009	165	ND0132.016	156	ND0138.527	157	ND0146.006	156
NC1810.009 STE	165	ND0132.016 STE	156	ND0138.527 STE	157	ND0146.006 STE	156
NC1810.027	165	ND0133.006	156	ND0139.009	156	ND0146.009	156
NC1810.027 STE	165	ND0133.006 STE	156	ND0139.009 STE	156	ND0146.009 STE	156
NC1811.009	165	ND0133.009	156	ND0139.012	156	ND0146.012	156
NC1811.009 STE	165	ND0133.009 STE	156	ND0139.012 STE	156	ND0146.012 STE	156
NC2215.039	154	ND0133.012	156	ND0139.026	156	ND0146.026	156
NC2215.039 STE	154	ND0133.012 STE	156	ND0139.026 STE	156	ND0146.026 STE	156
NC2216.039	154	ND0133.026	156	ND0140.006	156	ND0146.525	157
NC2216.039 STE	154	ND0133.026 STE	156	ND0140.006 STE	156	ND0146.525 STE	157
NC2219.039	154	ND0133.525	157	ND0140.009	156	ND0146.526	157
NC2219.039 STE	154	ND0133.525 STE	157	ND0140.009 STE	156	ND0146.526 STE	157
NC2220.039	154	ND0133.526	157	ND0140.012	156	ND0146.527	157
NC2220.039 STE	154	ND0133.526 STE	157	ND0140.012 STE	156	ND0146.527 STE	157
ND0120.515	159	ND0133.527	157	ND0140.026	156	ND0147.006	157
ND0120.515 STE	159	ND0133.527 STE	157	ND0140.026 STE	156	ND0147.006 STE	157
ND0120.516	159	ND0134.006	156	ND0140.525	157	ND0147.009	157
ND0120.516 STE	159	ND0134.006 STE	156	ND0140.525 STE	157	ND0147.009 STE	157
ND0120.517	159	ND0134.009	156	ND0140.526	157	ND0147.012	157
ND0120.517 STE	159	ND0134.009 STE	156	ND0140.526 STE	157	ND0147.012 STE	157
ND0123.512	158	ND0134.012	156	ND0140.527	157	ND0147.026	157
ND0123.512 STE	158	ND0134.012 STE	156	ND0140.527 STE	157	ND0147.026 STE	157
ND0123.513	158	ND0134.026	156	ND0141.006	156	ND0160.511	158
ND0123.513 STE	158	ND0134.026 STE	156	ND0141.006 STE	156	ND0160.511 STE	158
ND0123.516	159	ND0135.006	156	ND0141.009	156	ND0160.512	158
ND0123.516 STE	159	ND0135.006 STE	156	ND0141.009 STE	156	ND0160.512 STE	158
ND0124.511	158	ND0135.009	156	ND0141.012	156	ND0160.513	158
ND0124.511 STE	158	ND0135.009 STE	156	ND0141.012 STE	156	ND0160.513 STE	158
ND0124.512	158	ND0135.012	156	ND0141.026	156	ND0160.515	159
ND0124.512 STE	158	ND0135.012 STE	156	ND0141.026 STE	156	ND0160.515 STE	159
ND0124.513	158	ND0135.016	156	ND0141.525	157	ND0160.517	159
ND0124.513 STE	158	ND0135.016 STE	156	ND0141.525 STE	157	ND0160.517 STE	159
ND0124.514	158	ND0135.026	156	ND0141.526	157	ND0161.511	158
ND0124.514 STE	158	ND0135.026 STE	156	ND0141.526 STE	157	ND0161.511 STE	158
ND0124.516	159	ND0135.525	157	ND0141.527	157	ND0161.512	158
ND0124.516 STE	159	ND0135.525 STE	157	ND0141.527 STE	157	ND0161.512 STE	158
ND0128.006	156	ND0135.526	157	ND0142.009	156	ND0161.513	158
ND0128.006 STE	156	ND0135.526 STE	157	ND0142.009 STE	156	ND0161.513 STE	158
ND0128.009	156	ND0135.527	157	ND0142.012	156	ND0161.515	159
ND0128.009 STE	156	ND0135.527 STE	157	ND0142.012 STE	156	ND0161.515 STE	159
ND0128.012	156	ND0136.006	156	ND0142.026	156	ND0161.516	159
ND0128.012 STE	156	ND0136.006 STE	156	ND0142.026 STE	156	ND0161.516 STE	159
ND0128.016	156	ND0136.009	156	ND0143.009	156	ND0161.517	159
ND0128.016 STE	156	ND0136.009 STE	156	ND0143.009 STE	156	ND0161.517 STE	159
ND0128.026	156	ND0136.012	156	ND0143.012	156	ND0162.511	158



Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page
ND0162.511 STE	158	ND0190.012 STE	156	NS0115.526 STE	140	NS0135.513 STE	141
ND0162.512	158	ND0190.026	156	NS0115.527	140	NS0135.514	141
ND0162.512 STE	158	ND0190.026 STE	156	NS0115.527 STE	140	NS0135.514 STE	141
ND0162.513	158	ND0190.525	157	NS0120.006	139	NS0135.515	142
ND0162.513 STE	158	ND0190.525 STE	157	NS0120.006 STE	139	NS0135.515 STE	142
ND0162.514	158	ND0190.526	157	NS0120.009	139	NS0135.516	142
ND0162.514 STE	158	ND0190.526 STE	157	NS0120.009 STE	139	NS0135.516 STE	142
ND0162.515	159	ND0190.527	157	NS0120.012	139	NS0135.517	142
ND0162.515 STE	159	ND0190.527 STE	157	NS0120.012 STE	139	NS0135.517 STE	142
ND0162.516	159	ND0445.009	163	NS0120.016	139	NS0136.511	141
ND0162.516 STE	159	ND0445.009 STE	163	NS0120.016 STE	139	NS0136.511 STE	141
ND0162.517	159	ND1903.004	162	NS0120.026	139	NS0136.512	141
ND0162.517 STE	159	ND1903.004 STE	162	NS0120.026 STE	139	NS0136.512 STE	141
ND0163.511	158	ND1905.009	162	NS0120.525	140	NS0136.513	141
ND0163.511 STE	158	ND1905.009 STE	162	NS0120.525 STE	140	NS0136.513 STE	141
ND0163.512	158	ND2602.512	163	NS0120.526	140	NS0136.514	141
ND0163.512 STE	158	ND2602.513	163	NS0120.526 STE	140	NS0136.514 STE	141
ND0163.513	158	NS0101.006	139	NS0120.527	140	NS0136.515	142
ND0163.513 STE	158	NS0101.006 STE	139	NS0120.527 STE	140	NS0136.515 STE	142
ND0163.514	158	NS0101.009	139	NS0121.006	139	NS0136.516	142
ND0163.514 STE	158	NS0101.009 STE	139	NS0121.006 STE	139	NS0136.516 STE	142
ND0163.515	159	NS0101.012	139	NS0121.009	139	NS0136.517	142
ND0163.515 STE	159	NS0101.012 STE	139	NS0121.009 STE	139	NS0136.517 STE	142
ND0163.516	159	NS0101.026	139	NS0121.016	139	NS0137.511	141
ND0163.516 STE	159	NS0101.026 STE	139	NS0121.016 STE	139	NS0137.511 STE	141
ND0163.517	159	NS0101.525	140	NS0121.026	139	NS0137.512	141
ND0163.517 STE	159	NS0101.525 STE	140	NS0121.026 STE	139	NS0137.512 STE	141
ND0164.515	159	NS0101.526	140	NS0123.009	139	NS0137.513	141
ND0164.515 STE	159	NS0101.526 STE	140	NS0123.009 STE	139	NS0137.513 STE	141
ND0164.516	159	NS0103.016	139	NS0123.012	139	NS0137.514	141
ND0164.516 STE	159	NS0103.016 STE	139	NS0123.012 STE	139	NS0137.514 STE	141
ND0164.517	159	NS0107.009	139	NS0123.026	139	NS0137.515	142
ND0164.517 STE	159	NS0107.009 STE	139	NS0123.026 STE	139	NS0137.515 STE	142
ND0165.511	158	NS0107.016	139	NS0125.009	139	NS0137.516	142
ND0165.511 STE	158	NS0107.016 STE	139	NS0125.009 STE	139	NS0137.516 STE	142
ND0165.512	158	NS0108.515	142	NS0125.012	139	NS0137.517	142
ND0165.512 STE	158	NS0108.515 STE	142	NS0125.012 STE	139	NS0137.517 STE	142
ND0165.513	158	NS0108.516	142	NS0125.016	139	NS0140.512	141
ND0165.513 STE	158	NS0108.516 STE	142	NS0125.016 STE	139	NS0140.512 STE	141
ND0165.514	158	NS0108.517	142	NS0125.026	139	NS0140.513	141
ND0165.514 STE	158	NS0108.517 STE	142	NS0125.026 STE	139	NS0140.513 STE	141
ND0165.516	159	NS0109.009	139	NS0126.516	142	NS0140.515	142
ND0165.516 STE	159	NS0109.009 STE	139	NS0126.516 STE	142	NS0140.515 STE	142
ND0165.517	159	NS0109.016	139	NS0126.517	142	NS0140.516	142
ND0165.517 STE	159	NS0109.016 STE	139	NS0126.517 STE	142	NS0140.516 STE	142
ND0166.515	159	NS0109.026	139	NS0134.511	141	NS0140.517	142
ND0166.515 STE	159	NS0109.026 STE	139	NS0134.511 STE	141	NS0140.517 STE	142
ND0166.516	159	NS01100.009	139	NS0134.512	141	NS0141.511	141
ND0166.516 STE	159	NS01100.009 STE	139	NS0134.512 STE	141	NS0141.511 STE	141
ND0166.517	159	NS0111.009	139	NS0134.513	141	NS0141.512	141
ND0166.517 STE	159	NS0111.009 STE	139	NS0134.513 STE	141	NS0141.512 STE	141
ND0188.009	156	NS0115.006	139	NS0134.514	141	NS0141.513	141
ND0188.009 STE	156	NS0115.006 STE	139	NS0134.514 STE	141	NS0141.513 STE	141
ND0189.009	156	NS0115.009	139	NS0134.515	142	NS0141.515	142
ND0189.009 STE	156	NS0115.009 STE	139	NS0134.515 STE	142	NS0141.515 STE	142
ND0189.012	156	NS0115.012	139	NS0134.516	142	NS0141.516	142
ND0189.012 STE	156	NS0115.012 STE	139	NS0134.516 STE	142	NS0141.516 STE	142
ND0189.026	156	NS0115.016	139	NS0134.517	142	NS0141.517	142
ND0189.026 STE	156	NS0115.016 STE	139	NS0134.517 STE	142	NS0141.517 STE	142
ND0190.006	156	NS0115.026	139	NS0135.511	141	NS0147.511	141
ND0190.006 STE	156	NS0115.026 STE	139	NS0135.511 STE	141	NS0147.511 STE	141
ND0190.009	156	NS0115.525	140	NS0135.512	141	NS0147.512	141
ND0190.009 STE	156	NS0115.525 STE	140	NS0135.512 STE	141	NS0147.512 STE	141
ND0190.012	156	NS0115.526	140	NS0135.513	141	NS0147.513	141



Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page	Fig-Nr. Fig No.	Seite Page
NS0147.513 STE	141	NS0153.525 STE	140	NS0903.016 STE	143	NS1812.002 STE	165
NS0147.514	141	NS0153.526	140	NS0904.009	144	NS1812.009	165
NS0147.514 STE	141	NS0153.526 STE	140	NS0904.009 STE	144	NS1812.009 STE	165
NS0147.515	142	NS0153.527	140	NS0909.016	143	NS2101.025	147
NS0147.515 STE	142	NS0153.527 STE	140	NS0909.016 STE	143	NS2101.025 STE	147
NS0147.516	142	NS0154.009	139	NS0913.009	144	NS2107.25A	146
NS0147.516 STE	142	NS0154.009 STE	139	NS0913.009 STE	144	NS2107.25A STE	146
NS0147.517	142	NS0154.012	139	NS0915.009	144	NS2117.512	148
NS0147.517 STE	142	NS0154.012 STE	139	NS0915.009 STE	144	NS2117.512 STE	148
NS0148.026	139	NS0154.026	139	NS0917.009	144	NS2118.513	148
NS0148.026 STE	139	NS0154.026 STE	139	NS0917.009 STE	144	NS2118.513 STE	148
NS0149.009	139	NS0155.006	139	NS1201.014	144	NS2119.514	148
NS0149.009 STE	139	NS0155.006 STE	139	NS1201.014 STE	144	NS2119.514 STE	148
NS0149.026	139	NS0155.009	139	NS1201.016	144	NS2120.526	148
NS0149.026 STE	139	NS0155.009 STE	139	NS1201.016 STE	144	NS2120.526 STE	148
NS0150.006	139	NS0155.012	139	NS1601.006	145	NS2121.525	148
NS0150.006 STE	139	NS0155.012 STE	139	NS1601.006 STE	145	NS2121.525 STE	148
NS0150.009	139	NS0155.026	139	NS1602.007	145	NS2122.527	148
NS0150.009 STE	139	NS0155.026 STE	139	NS1602.007 STE	145	NS2122.527 STE	148
NS0150.012	139	NS0155.525	140	NS1604.007	145	NS2201.009	145
NS0150.012 STE	139	NS0155.525 STE	140	NS1604.007 STE	145	NS2201.009 STE	145
NS0150.026	139	NS0155.526	140	NS1605.007	145	NS2202.009	144
NS0150.026 STE	139	NS0155.526 STE	140	NS1605.007 STE	145	NS2202.009 STE	144
NS0150.525	140	NS0155.527	140	NS1701.004	149	NS2202.012	144
NS0150.525 STE	140	NS0155.527 STE	140	NS1701.004 STE	149	NS2202.012 STE	144
NS0150.526	140	NS0156.006	139	NS1701.018	149	NS2203.009	145
NS0150.526 STE	140	NS0156.006 STE	139	NS1701.018 STE	149	NS2203.009 STE	145
NS0151.006	139	NS0156.009	139	NS1701.027	149	NS2203.026	145
NS0151.006 STE	139	NS0156.009 STE	139	NS1701.027 STE	149	NS2203.026 STE	145
NS0151.009	139	NS0156.012	139	NS1702.012	149	NS2203.029	145
NS0151.009 STE	139	NS0156.012 STE	139	NS1702.012 STE	149	NS2203.029 STE	145
NS0151.012	139	NS0156.016	139	NS1702.016	149	NS2204.009	144
NS0151.012 STE	139	NS0156.016 STE	139	NS1702.016 STE	149	NS2204.009 STE	144
NS0151.026	139	NS0156.026	139	NS1703.004	149	NS2205.009	145
NS0151.026 STE	139	NS0156.026 STE	139	NS1703.004 STE	149	NS2205.009 STE	145
NS0151.525	140	NS0156.525	140	NS1703.018	149	NS2205.029	145
NS0151.525 STE	140	NS0156.525 STE	140	NS1703.018 STE	149	NS2205.029 STE	145
NS0151.526	140	NS0156.526	140	NS1703.027	149	NS2206.009	144
NS0151.526 STE	140	NS0156.526 STE	140	NS1703.027 STE	149	NS2206.009 STE	144
NS0151.527	140	NS0156.527	140	NS1704.004	149	NS2207.009	145
NS0151.527 STE	140	NS0156.527 STE	140	NS1704.004 STE	149	NS2207.009 STE	145
NS0152.006	139	NS0157.009	139	NS1801.016	164	NS2207.026	145
NS0152.006 STE	139	NS0157.009 STE	139	NS1801.016 STE	164	NS2207.026 STE	145
NS0152.009	139	NS0178.516	142	NS1802.008	164	NS2209.009	145
NS0152.009 STE	139	NS0178.516 STE	142	NS1802.008 STE	164	NS2209.009 STE	145
NS0152.012	139	NS0178.517	142	NS1802.019	164	NS2210.009	144
NS0152.012 STE	139	NS0178.517 STE	142	NS1802.019 STE	164	NS2210.009 STE	144
NS0152.026	139	NS0191.009	139	NS1805.016	164	NS2311.511	147
NS0152.026 STE	139	NS0191.009 STE	139	NS1805.016 STE	164	NS2311.511 STE	147
NS0152.525	140	NS0191.026	139	NS1806.002	164	NS2311.512	147
NS0152.525 STE	140	NS0191.026 STE	139	NS1806.002 STE	164	NS2311.512 STE	147
NS0152.526	140	NS0409.009	143	NS1808.022	164	NS2414.513	146
NS0152.526 STE	140	NS0409.009 STE	143	NS1808.022 STE	164	NS2414.513 STE	146
NS0152.527	140	NS0409.026	143	NS1808.036	164	NS2701.511	150
NS0152.527 STE	140	NS0409.026 STE	143	NS1808.036 STE	164	NS2701.511 STE	150
NS0153.006	139	NS0410.009	143	NS1809.007	164	NS2701.512	150
NS0153.006 STE	139	NS0410.009 STE	143	NS1809.007 STE	164	NS2701.512 STE	150
NS0153.009	139	NS0412.009	143	NS1809.009	164	NS2701.513	150
NS0153.009 STE	139	NS0412.009 STE	143	NS1809.009 STE	164	NS2701.513 STE	150
NS0153.012	139	NS0412.026	143	NS1809.023	164	NS2702.511	150
NS0153.012 STE	139	NS0412.026 STE	143	NS1809.023 STE	164	NS2702.511 STE	150
NS0153.026	139	NS0414.009	143	NS1809.027	164	NS2702.512	150
NS0153.026 STE	139	NS0414.009 STE	143	NS1809.027 STE	164	NS2702.512 STE	150
NS0153.525	140	NS0903.016	143	NS1812.002	165	NS2702.513	150



Fig-Nr. <i>Fig No.</i>	Seite <i>Page</i>	Fig-Nr. <i>Fig No.</i>	Seite <i>Page</i>	Fig-Nr. <i>Fig No.</i>	Seite <i>Page</i>	Fig-Nr. <i>Fig No.</i>	Seite <i>Page</i>
NS2702.513 STE	150	S2709.098	130	S2728.098	130	TC1SL060.009	155
NS2766.525	150	S2709.098 STE	130	S2728.098 STE	130	TC1SL060.009 STE	155
NS2766.525 STE	150	S2710.098	130	S2729.098	130	TC9SL040.065	155
NS2766.526	150	S2710.098 STE	130	S2729.098 STE	130	TC9SL040.065 STE	155
NS2766.526 STE	150	S27101.030	133	S2730.501	131	TC9SL040.073	155
NS2766.555	150	S27101.030 STE	133	S2730.501 STE	131	TC9SL040.073 STE	155
NS2766.555 STE	150	S27102.030	133	S2731.501	131	TC9SL055.065	155
NS2789.526	150	S27102.030 STE	133	S2731.501 STE	131	TC9SL055.065 STE	155
NS2789.526 STE	150	S27103.030	133	S2732.501	131	TC9SL055.073	155
NS3501.005 STE	169	S27103.030 STE	133	S2732.501 STE	131	TC9SL055.073 STE	155
NS3501.027 STE	169	S27104.030	133	S2733.501	131		
NS3601.005 STE	169	S27104.030 STE	133	S2733.501 STE	131		
NS3601.027 STE	169	S27105.030	133	S2734.501	131		
NS3701.027 STE	168	S27105.030 STE	133	S2734.501 STE	131		
NS3703.036 STE	168	S27106.030	133	S2735.501	131		
NS3705.036 STE	168	S27106.030 STE	133	S2735.501 STE	131		
NS3706.027 STE	168	S27107.030	133	S2736.501	131		
NS3801.005 STE	168	S27107.030 STE	133	S2736.501 STE	131		
NS3801.027 STE	168	S27108.030	133	S2737.502	131		
NS3803.009 STE	168	S27108.030 STE	133	S2737.502 STE	131		
NS3804.027 STE	168	S27109.030	133	S2738.502	131		
NS3805.027 STE	168	S27109.030 STE	133	S2738.502 STE	131		
NS3901.027 STE	168	S2711.098	130	S2739.502	131		
NS4001.027 STE	169	S2711.098 STE	130	S2739.502 STE	131		
NS4002.027 STE	169	S27110.030	133	S2740.502	131		
NS4101.009 STE	169	S27110.030 STE	133	S2740.502 STE	131		
PC320	24	S27113.030	133	S2741.502	131		
PC320 STE	24	S27113.030 STE	133	S2741.502 STE	131		
PC5023.132	48/65	S27114.030	133	S2742.502	131		
PC5023.132 STE	48/65	S27114.030 STE	133	S2742.502 STE	131		
PC5023.133	48/65	S2712.098	130	S2774.030	133		
PC5023.133 STE	48/65	S2712.098 STE	130	S2774.030 STE	133		
PC5023.138	48/65	S2713.098	130	S2785.501	131		
PC5023.138 STE	48/65	S2713.098 STE	130	S2785.501 STE	131		
PC5023.139	48/65	S2714.098	130	S2788.502	131		
PC5023.139 STE	48/65	S2714.098 STE	130	S2788.502 STE	131		
PC5023.140	48/65	S2715.098	130	S2790.030	133		
PC5023.140 STE	48/65	S2715.098 STE	130	S2790.030 STE	133		
PC5023.141	49/65	S2716.098	130	S2791.030	133		
PC5023.141 STE	49/65	S2716.098 STE	130	S2791.030 STE	133		
PC532.041	106	S2717.098	130	S2792.030	133		
PC532.041 STE	106	S2717.098 STE	130	S2792.030 STE	133		
PC532.045	106	S2718.098	130	S2793.030	133		
PC532.045 STE	106	S2718.098 STE	130	S2793.030 STE	133		
PC532.046	106	S2719.098	130	S2794.030	133		
PC532.046 STE	106	S2719.098 STE	130	S2794.030 STE	133		
PC532.047	106	S2720.098	130	S2795.030	133		
PC532.047 STE	106	S2720.098 STE	130	S2795.030 STE	133		
PC532.048	106	S2721.098	130	SC2801.098	132		
PC532.048 STE	106	S2721.098 STE	130	SC2801.098 STE	132		
PC532.061	106	S2722.098	130	SC2802.098	132		
PC532.061 STE	106	S2722.098 STE	130	SC2802.098 STE	132		
PC532.062	107	S2723.098	130	SC2803.098	132		
PC532.062 STE	107	S2723.098 STE	130	SC2803.098 STE	132		
PC532.063	107	S2724.098	130	SC2804.098	132		
PC532.063 STE	107	S2724.098 STE	130	SC2804.098 STE	132		
PC532.064	107	S2724.501	131	SC2805.098	132		
PC532.064 STE	107	S2724.501 STE	131	SC2805.098 STE	132		
PC532.065	107	S2725.098	130	TC1SL030.009	155		
PC532.065 STE	107	S2725.098 STE	130	TC1SL030.009 STE	155		
PC532.066	107	S2726.098	130	TC1SL040.009	155		
PC532.066 STE	107	S2726.098 STE	130	TC1SL040.009 STE	155		
PC532.067	108	S2727.098	130	TC1SL050.009	155		
PC532.067 STE	108	S2727.098 STE	130	TC1SL050.009 STE	155		



A series of horizontal dotted lines for writing, spanning the width of the page.



Komet Medical
Trophagener Weg 25 · 32657 Lemgo · Germany
Telefon +49 (0) 5261 701-400
info@kometmedical.de
www.kometmedical.de



EPC
Envelope Packaging Concept

